

## Cylindrical metal-coated optical fibre devices for filters and sensors.

A. Diez, M.V. Andres, D.O. Culverhouse\* and T.A. Birks#.

Departamento de Física Aplicada, Universidad de Valencia,  
Dr. Moliner 50, 46100 Burjasot (Valencia), Spain.

\*Optoelectronics Research Centre, University of Southampton,  
Southampton SO17 1BJ, United Kingdom.

#School of Physics, University of Bath, Claverton Down,  
Bath BA2 7AY, United Kingdom.

Indexing terms: Optical fibres, fibre-optic components, optical filters, optical sensors, plasma waves.

*Abstract* Novel fibre-optic components suitable for sensor applications and wavelength filters are reported. The devices consist of a tapered fibre whose uniform waist has been coated with a thin layer of gold. The operation principle is the resonant excitation of a surface plasma mode of the metal film.

*Introduction:* We have combined a fusion-pulling technique and a standard metal-coating technique to fabricate novel optical fibre devices based on a tapered single-mode fibre with a metal coating. These devices can be regarded as a cylindrical version of metal-coated side-polished fibre-optic devices [1]. Both are based on an interaction of a surface plasma mode of the metal film with the evanescent field of the mode guided by the core. The polishing technique requires the removal of most of the cladding on one side of the fibre, to within few microns of the core, because the evanescent fields in a standard fibre decays over such a distance. On the other hand, in

the fusion-pulling technique no material is removed. Instead, the reduction of the core diameter causes the evanescent field to spread across the cladding (itself reduced in size) and reach the outer boundary.

In this letter, we demonstrate that the fabrication of such cylindrical devices is feasible and we give the preliminary experimental results that we have obtained. To our knowledge, this is the first time this has been reported. These novel resonant components can be suitable for sensor applications (where a mesurand changes the external refractive index) and tuneable spectral filters (e.g., for gain flattening or ASE removal in fibre amplifiers). Although, chemical sensor based on a narrow cladding-moded taper with a metal coating have already been described [2], here we consider wider tapers where light is still guided substantially by the fibre core.

*Theory:* Figure 1(a) shows a cross section of an ideal structure, where  $a$  and  $b$  are the core and cladding radii at the waist, respectively, and  $c-b$  is the metal film thickness. Optically, it can be regarded as a step-index single-mode fibre core (a dielectric/dielectric waveguide, Fig. 1(b)) and a metal-coated dielectric cylinder (a dielectric/metal/dielectric waveguide, Fig. 1(c)). which are weakly coupled together. No interactions are expected except at resonances, where the effective indices of modes of the two waveguides match. A theoretical analysis, using a standard boundary-value method, shows that most of the mode spectrum of the whole structure is the superposition of the mode spectra of these two waveguides (with no interaction between them), but coupling does occur for some particular combinations of parameters [3]. Figure 2 shows an example where there is coupling between the fundamental mode of the fibre core and a hybrid surface plasma mode of the metal-coated dielectric cylinder: resonant excitation and power transfer is expected around the crossing point. Since any coupled light will be absorbed in the metal film, a resonant dip would be expected in the

transmission spectrum of the device. Because the effective index of the plasma mode depends strongly on the wavelength of the light and the external refractive index, the resonance (and transmission loss) depends on both parameters.

*Experimental procedure and results:* The devices were fabricated from a standard single-mode fibre with a cutoff wavelength of 1.2  $\mu\text{m}$ , a core diameter of 7.5  $\mu\text{m}$  and a cladding diameter of 125  $\mu\text{m}$ . The fibre was stripped of its coating and narrowed using a fusion-pulling technique. The diameter at the taper waist was reduced to about 30  $\mu\text{m}$  and was uniform over a 15  $\mu\text{m}$  length, these values being controlled using the methods of Ref. 4. A thin layer of gold was evaporated onto the taper waist, either on one side or on two opposite sides. This simple technique gives a non-uniform coating. Finally, transmission spectra were recorded for different external refractive indices, specified by applying a standard index fluid to the waist.

Figure 3 gives the transmission spectra of a device with a taper waist of 30  $\mu\text{m}$  and a 24 nm gold film, evaporated on two opposite sides of the taper. The external refractive-index values stated in the figure caption are the nominal values of commercially available fluids, without allowing for dispersion.

Figure 4 gives the transmission spectra of two devices with waist diameter of 31.5  $\mu\text{m}$  and 38  $\mu\text{m}$  and gold films of 24 nm and 23 nm, respectively. In these devices the metal was evaporated only on one side of the taper waists.

In each case, substantial dips in the transmission spectra were observed. The wavelength of minimum transmission could be varied by changing the external index. Equivalently, the transmission at a particular wavelength was dependent on the index. The device with metal evaporated

on two opposite sides (Fig.3) exhibits stronger absorption peaks than the devices coated only on one side (Fig. 4), as might be expected. The resonances are broad-band. We are not yet able to evaluate experimentally the effects of non-uniformity of our coatings. However, because the plasma wave's effective index depends on the film thickness, non-uniformity will chirp the resonance, giving the observed broad resonances. Hence, a uniform coating (a true cylindrical metal layer) would reduce the width of the absorption peak. In contrast, suitable conditioning of the absorption spectrum (for specialist filter applications) should be possible by controlling the longitudinal variation of the taper diameter [4], and the longitudinal and azimuthal variations of the film thickness.

Conclusions: Novel cylindrical metal-coated optical fibre devices can be fabricated coating the waist of a tapered fibre with a metal layer. The devices exhibit strong resonant coupling between the fundamental fibre mode and the surface plasma mode, which depends on the external refractive-index and the wavelength as well as other parameters. Applications include optical sensors and spectral filters.

Acknowledgements: A.D. and M.V.A. would like to acknowledge the Dirección General de Investigación Científica y Técnica of Spain (grant TIC93-1203) for financial support. T.A.B. is a Royal Society University Research Fellow. D.O.C. is a Research Fellow funded by the U.K. Engineering and Physical Sciences Research Council.

#### References.

- [1] R. Alonso, J. Subias, J. Pelayo, F. Villuendas and J. Tornos, 'Single-mode, optical-fiber sensors and tunable wavelength filters based on the

resonant excitation of metal-clad modes', *Appl. Opt.*, 1994, **33**, pp. 5197-5201.

- [2] A.J.C. Tubb, F.P. Payne, R. Millington and C.R. Lowe, 'Singlemode optical fibre surface plasma wave chemical sensor', *Electron. Lett.*, 1995, **31**, pp. 1770-1771.
- [3] A. Diez and M.V. Andres, 'Cylindrical multilayer optical waveguides: Applications', *Second Iberoamerican Meeting on Optics, SPIE Proceedings*, 1996, **2730**, pp. 514-517.
- [4] R.P. Kenny, T.A. Birks and K.P. Oakley, 'Control of optical fibre taper shape', *Electron. Lett.*, 1991, **77**, pp. 1654-1656.


Figure captions.

Figure 1. Schematic cross sections of (a) a metal-coated optical fibre, (b) an optical fibre core and (c) a metal-coated dielectric cylinder.

Figure 2. Calculated effective-index,  $h$ , as a function of the external refractive-index,  $n_4$ , at  $l=1.3$  mm. (1) The fundamental mode of a step-index optical fibre, (2) the hybrid surface plasma mode of a gold-coated dielectric cylinder and ( $\circ$ ) the hybrid modes of a metal-coated optical fibre. Parameters (see figure 1):  $a=2.52$  mm,  $b=22.4$  mm,  $c-b=9.2$  nm,  $n_1=1.45152$ ,  $n_2=1.44725$  and  $n_3=0.38-j8.8$


Figure 3. Transmission spectra of a taper with a waist diameter and gold thickness of 30 mm and 24 nm respectively, for three values of nominal external refractive-index: (a) 1.436, (b) 1.438 and (c) 1.440.

Figure 4. Transmission spectra for two tapers with waist diameters and gold thickness of 31.5 mm and 24 nm (—) and 38 mm and 23 nm (---) respectively, for four values of nominal external refractive-index: (a) 1.440, (b) 1.442, (c) 1.446 and (d) 1.448 .

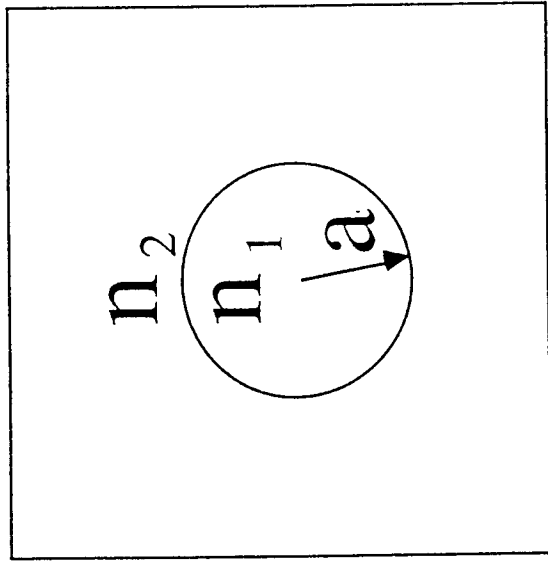



(b)

(a)

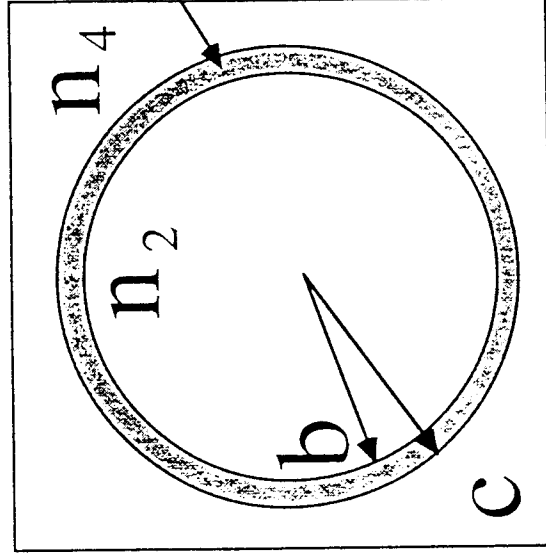


(c)

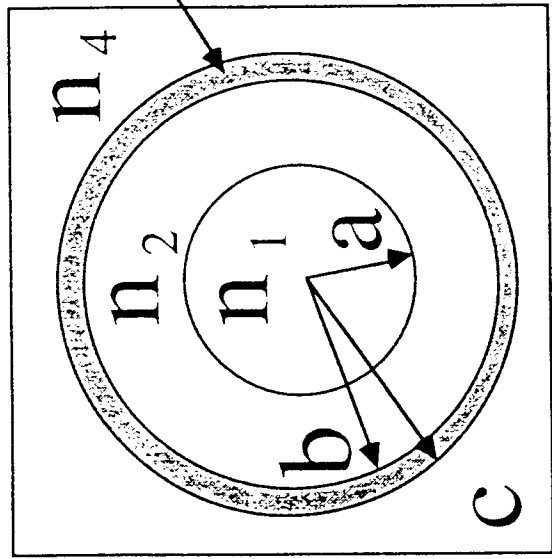

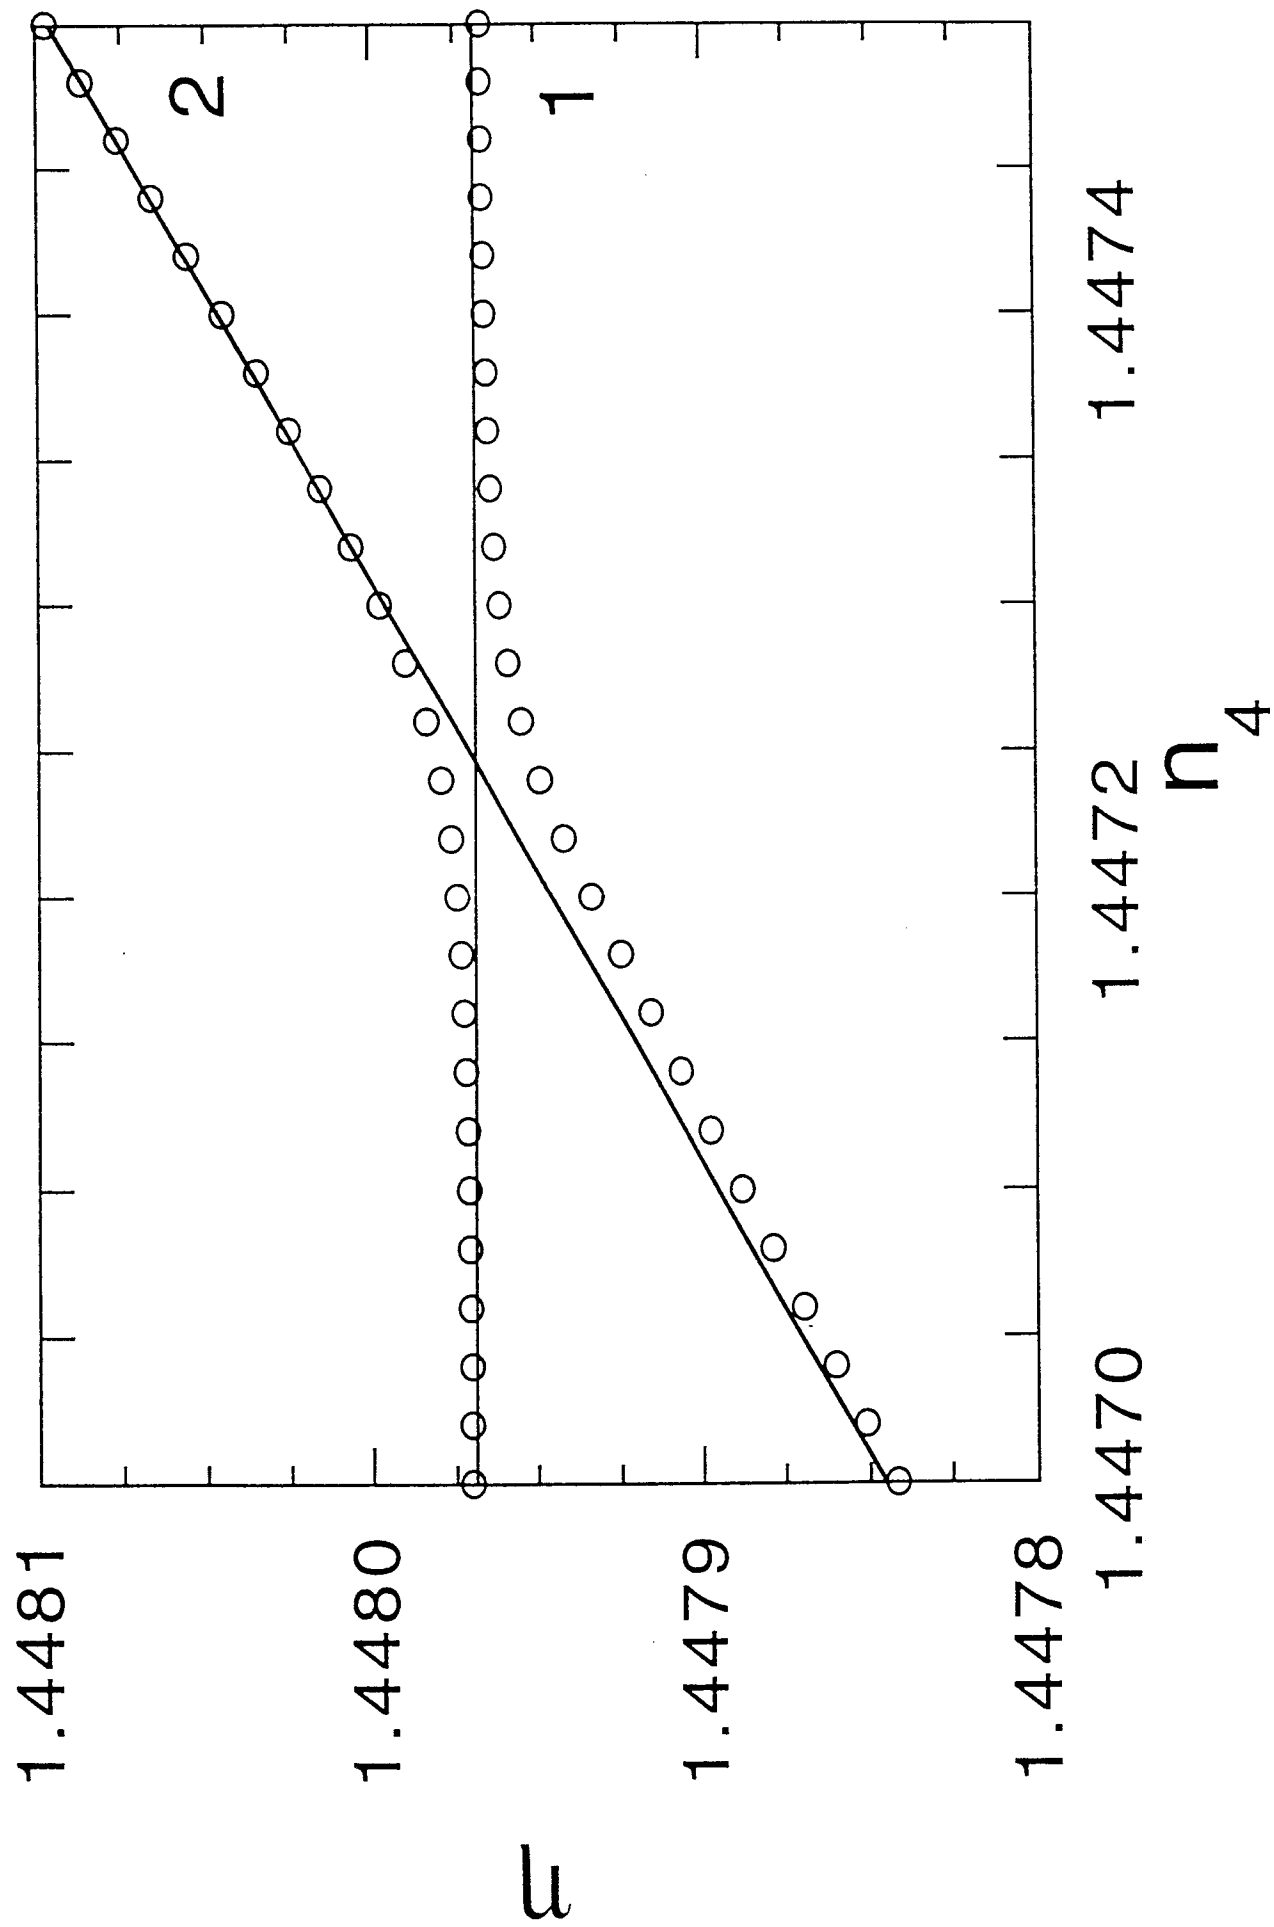



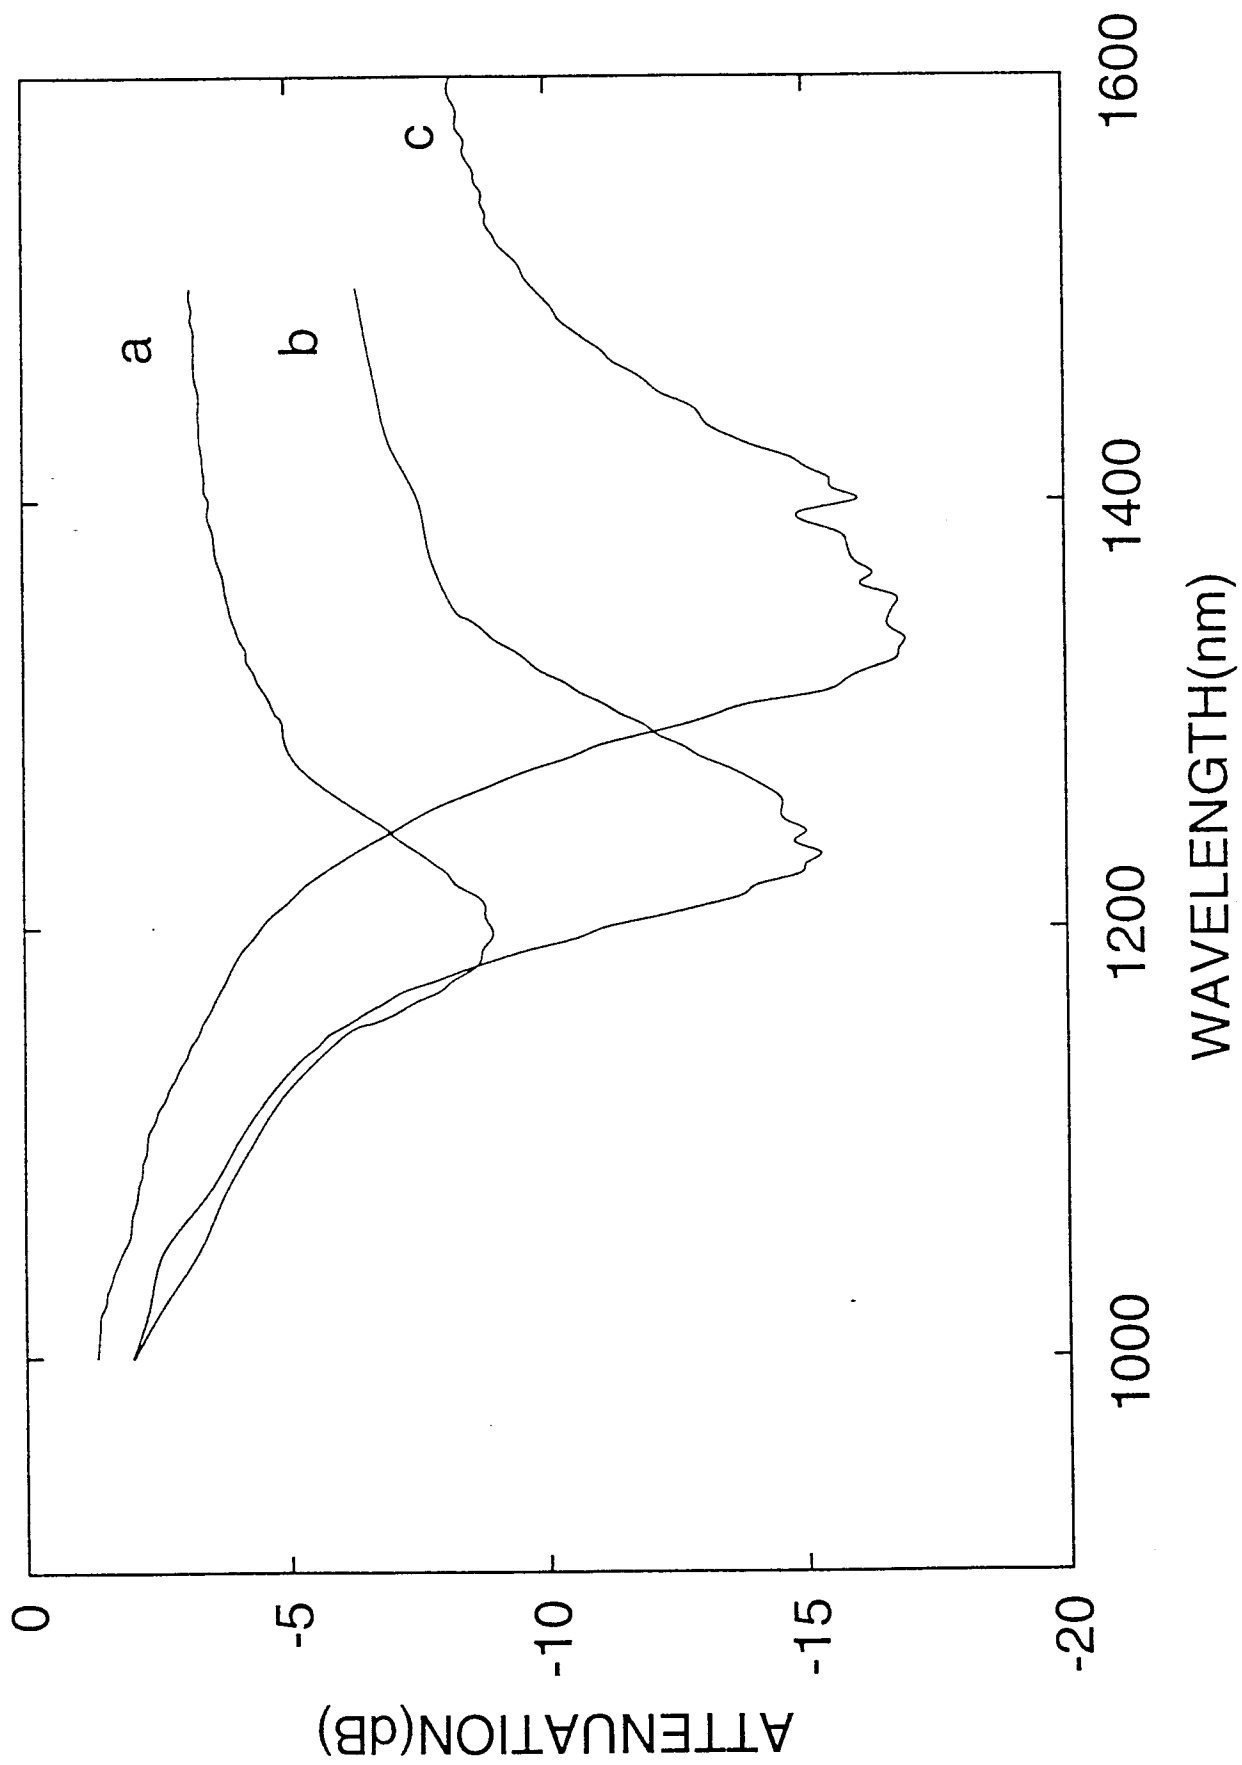

0.5H  
W

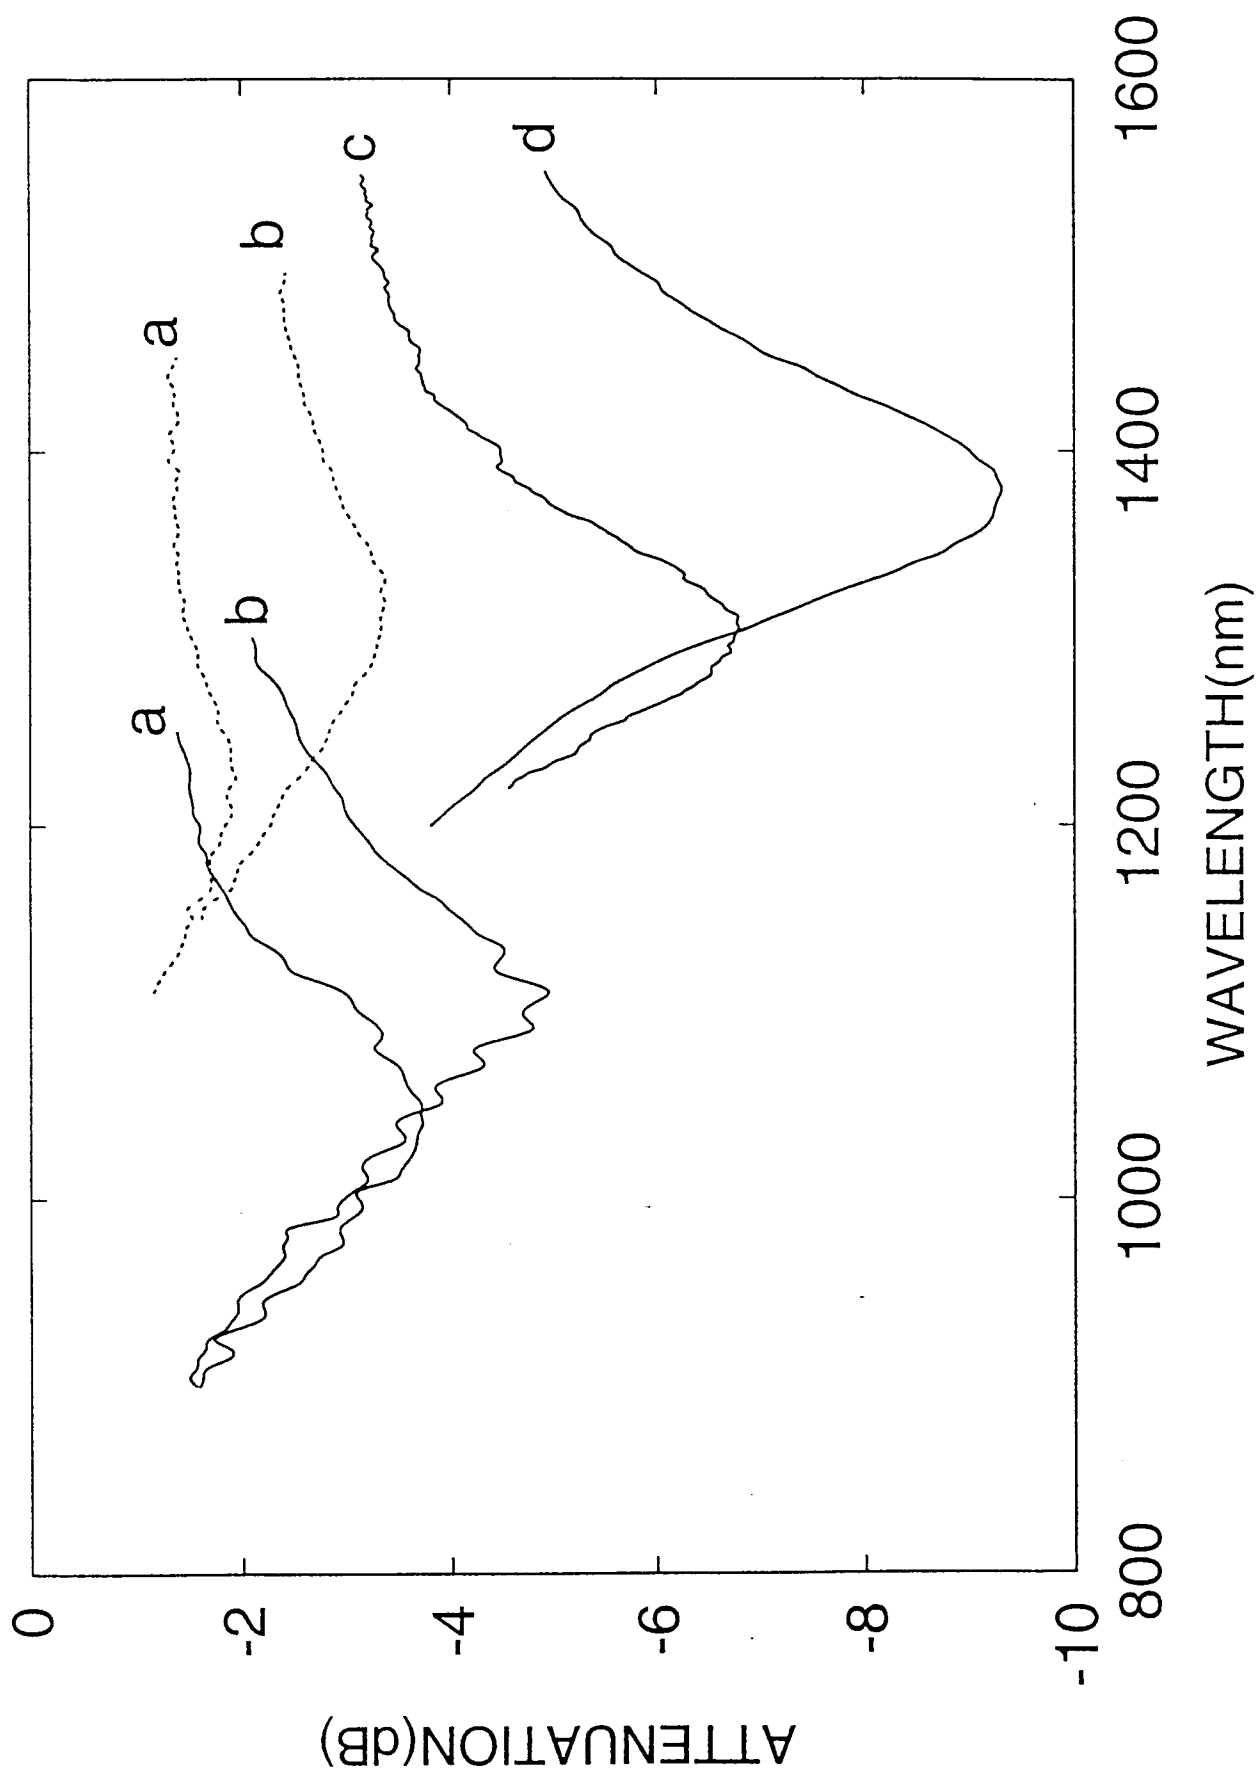


Fig. 4