

Advanced nonlinear signal processing in silicon-based waveguides

P. Petropoulos, M. Ettabib, K. Bottrill, C. Lacava,
F. Parmigiani, K. Hammani*
Optoelectronics Research Centre, University of
Southampton, Southampton SO17 1BJ, United Kingdom
Email: pp@orc.soton.ac.uk

M. Brun, P. Labeye, S. Nicoletti
CEA Leti MINATEC Campus, F-38054 Grenoble 9, France

A. Bogris**, A. Kapsalis, D. Syvridis
Department of Informatics and Telecommunications,
National and Kapodistrian University of
Athens, Panepistimiopolis, Ilissia, 15784, Athens, Greece

*Now at Laboratoire Interdisciplinaire Carnot de Bourgogne
(ICB), UMR 6303 CNRS-Université de Bourgogne, 9
av. A. Savary, BP 47 870, F-21078 Dijon Cedex, France
**Also, with Department of Informatics, Technological
Educational Institute of Athens, Aghiou Spiridonos, 12210
Egaleo, Athens, Greece

Abstract—This talk presents recent progress in optical signal processing based on compact waveguides fabricated mainly using silicon germanium alloys. Applications include supercontinuum generation, wavelength conversion and signal regeneration.

Keywords—silicon photonics; nonlinear optics; optical signal processing; optical communications

OUTLINE

Whilst nonlinear optical signal processing has benefitted vastly from advances in optical glasses and developments in optical fibre design and fabrication, it is widely accepted that there is still a lot to be desired from materials that are to constitute the nonlinear elements in processing systems. Small-dimension waveguides based on silica have recently shown great potential in this direction, and a number of important demonstrations have been reported using pure silicon waveguides (see e.g [1]). Here we review recent progress, and focus on the potential of silicon germanium waveguides, in which the inclusion of germanium allows flexibility in the manipulation of the optical properties of the nonlinear element [2, 3] – see Fig.1. Recent applications in wavelength conversion [4], signal regeneration [5] as well as supercontinuum generation [6] are reviewed.

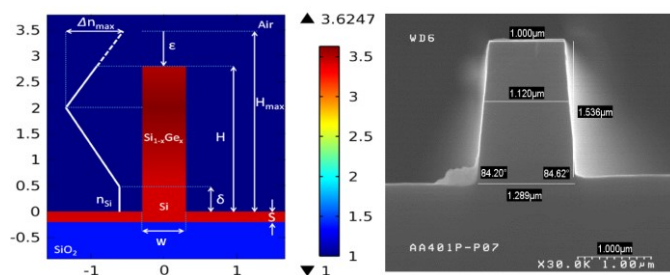


Fig. 1. (Left) Design of a silicon germanium waveguide exhibiting a graded refractive index variation; (right) scanning electron microscopy image of the fabricated waveguide [6].

REFERENCES

- [1] M. A. Foster, A. C. Turner, J. E. Sharping, B. S. Schmidt, M. Lipson, and A. L. Gaeta, "Broad-band optical parametric gain on a silicon photonic chip," *Nature*, vol. 441, pp. 960-963, 2006.
- [2] K. Hon, R. Soref, and B. Jalali, "The third-order nonlinear optical coefficients of Si, Ge, and Si_{1-x}Ge_x in the midwave and longwave infrared," *J. Appl. Phys.*, vol. 110, p. 011301, 2011.
- [3] K. Hammani, M. A. Ettabib, A. Bogris, A. Kapsalis, D. Syvridis, M. Brun, *et al.*, "Optical properties of silicon germanium waveguides at telecommunication wavelengths," *Optics Express*, vol. 21, pp. 16690-16701, Jul 15 2013.
- [4] M. A. Ettabib, K. Hammani, F. Parmigiani, L. Jones, A. Kapsalis, A. Bogris, *et al.*, "FWM-based wavelength conversion of 40 Gbaud PSK signals in a silicon germanium waveguide," *Optics Express*, vol. 21, pp. 16683-16689, Jul 15 2013.
- [5] M. Ettabib, F. Parmigiani, A. Kapsalis, A. Bogris, M. Brun, P. Labeye, *et al.*, "Record phase sensitive extinction ratio in a silicon germanium waveguide," in *CLEO'2015*, San Jose, CA, 2015, p. paper STh1.
- [6] M. A. Ettabib, L. Xu, A. Bogris, A. Kapsalis, M. Belal, E. Lorent, *et al.*, "Telecom to Mid-Infrared Supercontinuum Generation in a Silicon Germanium Waveguide," in *OFC'2015*, Los Angeles, CA, 2015, p. paper Tu2C.5.

This work was supported by the European Communities Seventh Framework Program FP7/2007-2013 under Grant 288304 (STREP CLARITY), and the U.K. Engineering and Physical Sciences Research Council under the Programme Grants "Transforming the Future Internet: The Photonics Hyperhighway" and "Silicon Photonics for Future Systems".