


AUTHOR QUERY FORM

	Journal: AESCTE Article Number: 3611	Please e-mail your responses and any corrections to: E-mail: corrections.esch@elsevier.vtex.lt
-----------------------------------------------------------------------------------	-----------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Dear Author,

Please check your proof carefully and mark all corrections at the appropriate place in the proof (e.g., by using on-screen annotation in the PDF file) or compile them in a separate list. Note: if you opt to annotate the file with software other than Adobe Reader then please also highlight the appropriate place in the PDF file. To ensure fast publication of your paper please return your corrections within 48 hours.

For correction or revision of any artwork, please consult <http://www.elsevier.com/artworkinstructions>

Any queries or remarks that have arisen during the processing of your manuscript are listed below and highlighted by flags in the proof. Click on the 'Q' link to go to the location in the proof.

Location in article	Query / Remark: click on the Q link to go Please insert your reply or correction at the corresponding line in the proof
Q1	Your article is registered as a regular item and is being processed for inclusion in a regular issue of the journal. If this is NOT correct and your article belongs to a Special Issue/Collection please contact <a.stanly@elsevier.com> immediately prior to returning your corrections. (p. 1/ line 1)
Q2	The author names have been tagged as given names and surnames (surnames are highlighted in teal color). Please confirm if they have been identified correctly and are presented in the desired order. (p. 1/ line 14)
Q3	IMPORTANT!!! Please note that your MS Word manuscript was converted to LaTeX in the appropriate Journal layout and style. Therefore, the final proof might have some flaws. Kindly please check your proof carefully in this regard. (p. 1/ line 43)
Q4	Please provide a conflict of interest statement. If there is no conflict of interest, state that. (p. 7/ line 107)
Q5	Uncited reference 14. Please cite it or delete from the list of references. (p. 8/ line 58)
Q6, Q7	The resolution of Figures 7 and 16 is too low to be used. Please provide better quality figures. (p. 4/ line 36; p. 8/ line 2)
Please check this box if you have no corrections to make to the PDF file <input type="checkbox"/>	

1 Q1

2
3
4
5
6
7

Contents lists available at ScienceDirect

Aerospace Science and Technology

www.elsevier.com/locate/aescte

67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132

Span morphing using the GNATSpar wing

14 Q2 R.M. Ajaj^{a,*}, M.I. Friswell^b, M. Burchak^c, W. Harasani^c15 ^a Aeronautics and Astronautics, University of Southampton, Southampton, SO17 1BJ, UK16 ^b College of Engineering, Swansea University, Swansea, SA1 8EN, UK17 ^c Aeronautical Engineering Department, King Abdulaziz University, Jeddah, Saudi Arabia

ARTICLE INFO

Article history:

Received 19 December 2014

Received in revised form 11 February 2016

Accepted 8 March 2016

Available online xxxx

ABSTRACT

Rigid wings usually fly at sub-optimal conditions generating unnecessary aerodynamic losses represented in flight time, fuel consumption, and unfavourable operational characteristics. High aspect ratio wings have good range and fuel efficiency, but lack manoeuvrability. On the other hand, low aspect ratio wings fly faster and are more manoeuvrable, but have poor aerodynamic performance. Span morphing technology allows integrating both features in a single wing design and allows continuously adjusting the wingspan to match the instantaneous flight conditions and mission objectives. This paper develops, a novel span morphing concept, the Gear driveN Autonomous Twin Spar (GNATSpar) for a mini-UAV. The GNATSpar can be used to achieve span extensions up to 100% but for demonstration purposes it is used here to achieve span extensions up to 20% to reduce induced drag and increase flight endurance. The GNATSpar is superior to conventional telescopic and articulated structures as it uses the space available in the opposite sides of the wing instead of relying on overlapping structures and bearings. In addition, it has a self-locking actuation mechanism due to the low lead angle of the driving worm gear. Following the preliminary aero-structural sizing of the concept, a physical prototype is developed and tested in the 7' × 5' wind-tunnel at the University of Southampton. Finally, benefits and drawbacks of the design are highlighted and analysed.

© 2016 Published by Elsevier Masson SAS.

1. Introduction and background

Continuous demands to enhance flight performance and control authority have focused the interest of aircraft designers on span morphing [1,2]. Wings with large spans have good range and fuel efficiency, but lack manoeuvrability and have relatively low cruise speeds. By contrast, aircraft with low aspect ratio wings can fly faster and become more manoeuvrable, but show poor aerodynamic efficiency [3]. A variable span wing can potentially integrate into a single aircraft the advantages of both designs, making this emerging technology especially attractive for military UAVs. Increasing the wingspan, increases the aspect ratio and wing area, and decreases the spanwise lift distribution for the same lift. Thus, the drag of the wing could be decreased, and consequently, the range or endurance of the vehicle increase. Unfortunately, the wing-root bending moment can increase considerably due to the larger span. Thus the aerodynamic, structural, aeroelastic, and control characteristics of the vehicle should be investigated in the design of variable-span morphing wings. Most span morphing con-

cepts are based on a telescopic mechanism, following the ideas of Ivan Makhonine, a Russian expatriate, where the wing outer panel telescoped inside the inner panel to enable span and wing area changes. The MAK-10 was the first design with a telescopic wing and it first flew in 1931. The mechanism was powered pneumatically and enabled span increases up to 62% (from 13 to 21 m) and area increases up to 57% (from 21 to 33 m²) [4]. Blondeau et al. [5] designed and fabricated a three segmented telescopic wing for a UAV. Hollow fibreglass shells were used to preserve the spanwise aerofoil geometry and ensure compact storage and deployment of the telescopic wing. To reduce the weight, they replaced the wing spars with inflatable actuators that could support the aerodynamic loads on the wing (in excess of 73 kg/m²). Their telescopic spar design consisted of three concentric circular aluminium tubes of decreasing diameter and increasing length, connected by ceramic linear bearings, and deployed and retracted using input pressures of 345–483 kPa (50–70 psi). The wing could undergo a 114% change in the aspect ratio, while supporting aerodynamic loads.

Blondeau et al. [6] adopted two identical telescopic spars instead of one, mechanically coupled by the ribs, to prevent wing twist and fluttering. The new prototype could undergo a 230% change in aspect ratio, and seam heights were reduced giving less

* Corresponding author. Tel.: +442380592453.

E-mail address: r.ajaj@soton.ac.uk (R.M. Ajaj).

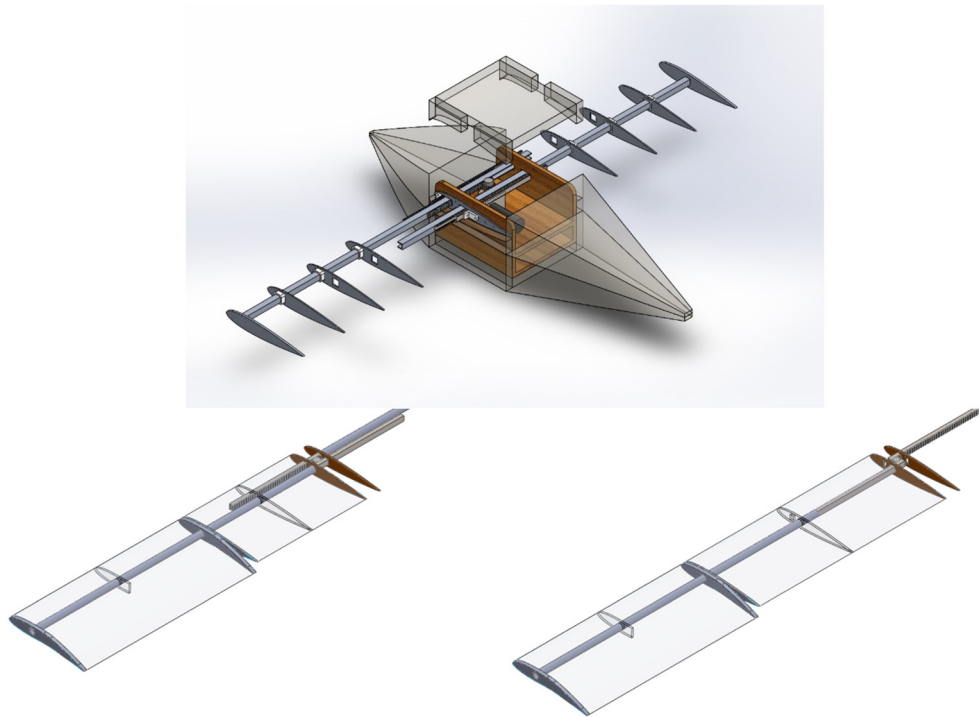


Fig. 1. Schematic of the GNATSpar concept.

parasitic drag. In its fully deployed condition the telescopic wing could achieve lift-to-drag ratios as high as 16, which was similar to its solid foam-core wing counterpart. The most dramatic morphing wing involving span change that has been realized as a wind tunnel prototype is the Agile Hunter by Lockheed Martin [7–9]. Funded by DARPA within the MAS program, the prototype was based on a military UAV capable of folding the inner sections of the wing near to the fuselage, to reduce the surface area and drag during transonic flight at low altitude (also called a Z-wing). The major challenge was the realization of suitable hinges that connect the two wing portions; the hinges have to sustain the aerodynamic loads but offer a smooth, continuous aerodynamic surface. Several materials were considered, including silicone-based and Shape Memory Polymer skins. Wind tunnel tests at Mach 0.6 showed a morphing capability from 0° to 130° over 65 s with a controllable, reliable and precise actuation. Bae et al. [10] performed both static aerodynamic and aeroelastic studies on the wing of a long-range cruise missile and highlighted some of the benefits and challenges associated with the design of a morphing wing capable of span change. The total drag decreased by approximately 25%, and the range increased by approximately 30%. The aeroelastic analysis showed that the flexibility of the morphing wing structure increased as the wingspan increased. At a given flight condition, the deformation from the aerodynamic loads was much larger than that of the conventional wing. Static aeroelastic considerations that a variable-span wing requires increased bending stiffness because the bending deformation is more significant than twist. Ajaj et al. [11] developed the Zigzag wingbox concept that allows the wing span of a medium altitude long endurance (a MALE) UAV to be varied by 44% (22% extension and 22% retraction). The Zigzag wingbox consists of a rigid part and a morphing part. The morphing part consists of various morphing partitions where in each partition there are two spars each consisting of two beams hinged together. Each morphing partition is covered by flexible skin and is bounded by two ribs through which the spars are connected. Furthermore, Ajaj et al. [12] developed the Compliant Spar concept that allows the wing span to be varied to provide roll control and enhance the operational per-

formance for a medium altitude long endurance (MALE) UAV. The Compliant Spar is made of compliant joints arranged in series to allow it to be flexible under axial (spanwise) loads but at the same time stiff enough to resist bending loads. Each compliant joint consists of two concentric overlapping AL 2024-T3 tubes joined together using elastomeric material. Under axial (spanwise) loading, the elastomeric material deforms in shear allowing the overlapping distance between the tubes to vary and hence the length (in the spanwise direction) of the joint/spar to vary. A more extensive review on span morphing technology (applications and concepts) for both fixed-wing and rotary-wing aircraft is given in Barbarino et al. [13].

2. The GNATSpar wing

The majority of the state-of-the-art span morphing concepts use telescopic and articulated mechanisms. Telescopic mechanisms tend to be heavy due to the need for minimum overlapping distance and bearings/lubrication between the different telescoping stages/sections. Furthermore, the telescoping stages/sections need to be of different cross-sectional areas to fit inside each other which increases their complexity and reduces their structural stiffness. The “Gear driveN Autonomous Twin Spar” (GNATSpar) design, proposed here, overcomes the need for telescopic and articulated mechanisms by utilising the available space in the opposite sides of the wing. In other words, the spar in each side of the wing is longer than the semi-span and the extra portion of the spar is stored in the opposite side of the wing and the wing-fuselage interface as shown in Fig. 1.

The GNATSpar design allows having a uniform cross-section spar along the wing semi-span which is not possible with telescopic designs. The GNATSpar is a multifunctional morphing concept because it serves as the primary structure in the wing and as the actuation system to achieve span extension. This multifunctionality is achieved by having the inboard portion of the GNATSpar acting as a rack so a rack and pinion mechanism can be used to actuate the design as shown in Fig. 2. With the GNATSpar design, the actuation system can be positioned in the

wing-fuselage interface, hence reducing the complexity of the design and structural weight. This paper focuses on symmetric span morphing to enhance the flight performance of air-vehicles. This implies that the spars in the starboard and port wing can be actuated together where one actuator drives the pinion and the pinion drives the rack on each spar simultaneously allowing an overall span extension. The GNATSpar can also be used for asymmetric span morphing with slight modification to the actuation system but this will be investigated in future studies.

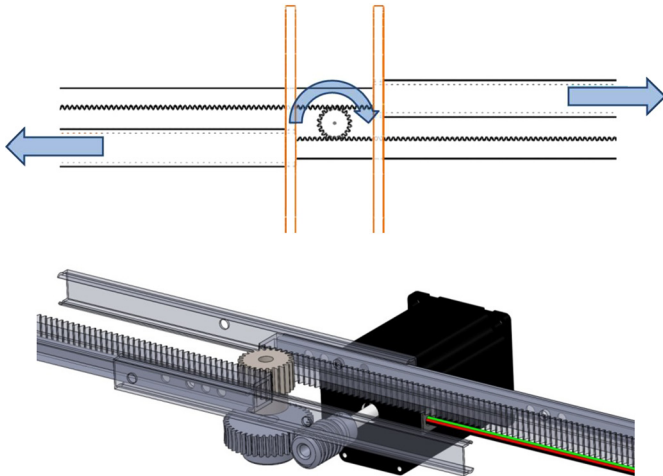


Fig. 2. Rack and pinion actuation system for the GNATSpar.

Table 1
The mini-UAV specs.

Parameter	Value
MTOW	5 kg
Cruising speed	15 m/s
Span	1.25 m
Chord	0.24 m

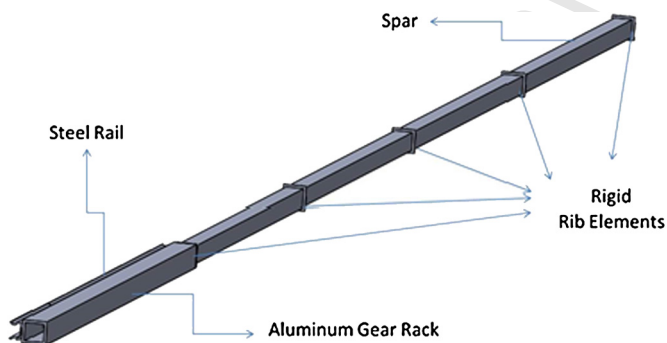


Fig. 3. Simplified spar model for FEA analysis.

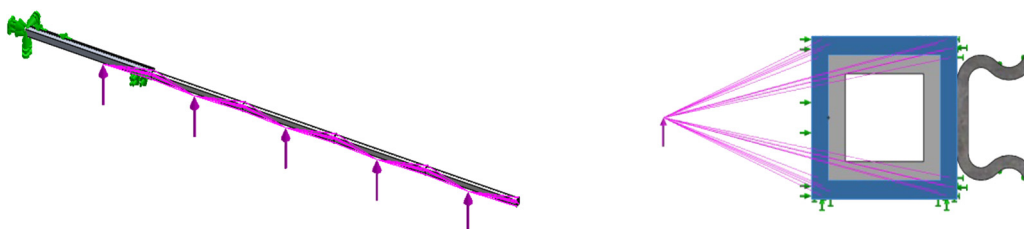


Fig. 4. Nodal aerodynamic loads along the wing semispan.

The GNATSpar will be covered by flexible elastomeric skin to allow span variations while maintaining the aerodynamic profile of the wing. The flexible skin is supported by a number of ribs. These ribs are bonded to the flexible skin and as the GNATSpar moves some of them slide on the spar to allow the skin to deform uniformly. The actuation system used consists of a pinion gear placed between the two racks, corresponding to each of the spars, producing a symmetrical movement of both spars. A spur gear and the pinion mounted together on the same shaft. Then, a DC motor drives the spur gear via a worm gear and the spur gear drives the pinion and hence the racks.

The GNATSpar design has a self-locking capability due to the low lead angle of the worm gear. This self-locking capability implies no actuation energy is needed to overcome the flexible skin elastic loads to keep the spar in the desired locations (span extension). This paper focuses on utilising the GNATSpar on a representative electrically-powered, mini-UAV with a rectangular, straight wing. The UAV's specifications are listed in Table 1.

3. Aero-structural design and sizing

Aero-structural sizing of the GNATSpar wing is performed to ensure it can withstand extreme aerodynamic, actuation and skin elastic loads during the mechanical and wind-tunnel testing planned. The XFLR5 aerodynamic solver is used to determine the aerodynamic forces and moments on the wing. XFLR5 is linear aerodynamic solver that uses XFOIL as its computation kernel with 3D wing design capability. A straight, untapered rectangular wing with a NACA0012 aerofoil is modelled in XFLR5. The aerodynamic loads associated with maximum span extension (20%) at a 3-g gust scenario are the limit aerodynamic loads. These limit loads were applied by 1.5 safety factor to determine the ultimate loads [15]. The ultimate loads are then converted into nodal forces applied at the wing ribs. A simplified cad model of the spar, used in FEA analysis, is shown in Fig. 3. In this model the rack is taken as a square section tube while rigid elements are used to simulate the sliding ribs through which the aerodynamic loads are transferred to the spar. The axial loads from the skin stretching and actuation are combined with the aerodynamic loads. Furthermore, a subsequent FEA analysis is conducted to determine the capability of the gear and rack teeth to undertake the axial loads created by the skin stretching and actuation.

The spar of the port wing is located at 25% of the chord while the spar of the starboard is at about 40% of the chord. This implies that the starboard spar will experience higher torsional load due to its offset from the aerodynamic centre and must be designed to withstand them. Therefore, the nodal loads are applied at an offset to the spar to simulate the actual scenario as shown in Fig. 4.

Two structural objectives are set in order to assess the feasibility of the design. First, all the elements that compose the spar should maintain stresses below the elastic limit of each material at the limit loads. The second objective is that at 1-g flight, the wingtip out-of-plane deformation (when fully extended) should be less than or equal to 10% of the semi-span as shown in Fig. 5.

A mesh convergence study was conducted to avoid the influence of the mesh size and density on the results. The sizing process indicated that a spar whose depth is 15 mm and thickness is 1.5 mm is required to withstand the loads. On the other hand, the spanwise and chordwise lift distribution were used to estimate




Fig. 5. Wingtip out-of-plane displacement constraint.

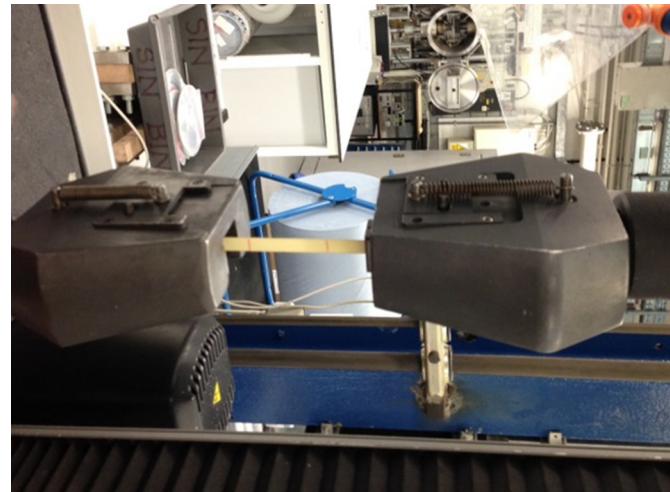


Fig. 6. Uniaxial testing of Latex using the Instron 5569 test rig.

the flexible skin out-of-plane deformations for different span extensions. The analysis showed that as the wingspan extends the out-of-plane deformations of the skin reduce significantly. Therefore, it was decided to add a 5% pre-tension into the skin to limit its deformations when the wing is fully retracted (0% extension).

4. Prototype manufacturing and integration

4.1. Flexible skin

Due to time and cost constraints, Latex was chosen as the flexible skin that covers the wing and maintains its aerodynamic shape. Uniaxial testing of 20 Latex specimens was performed as shown in Fig. 6 to determine the mechanical properties of the skin; hence, the size of the actuation system (mainly the motor and gear ratio).

Specimens with thicknesses of 0.5 mm and 1 mm where tested up to 70% strain. All the specimens tested are 100 mm long:

- Specimens 1–5 are 1 mm thick and 10 mm wide
- Specimens 6–10 are 1 mm thick and 25 mm wide;
- Specimens 11–15 are 0.5 mm thick and 10 mm wide; and,
- Specimens 16–20 are 0.5 mm thick and 25 mm wide.

Fig. 7 shows the stress-strain curves of the different Latex specimens. For specimens 11–15 that are 0.5 mm thick and 10 mm wide, initial tests showed that measured forces were very low and unsuitable for the load cell being used. The results were unreliable and so the test was not continued for these specimens. In Fig. 7, the curves with “avg” legend represent the mechanical behaviour of the skin with 90% confidence levels.


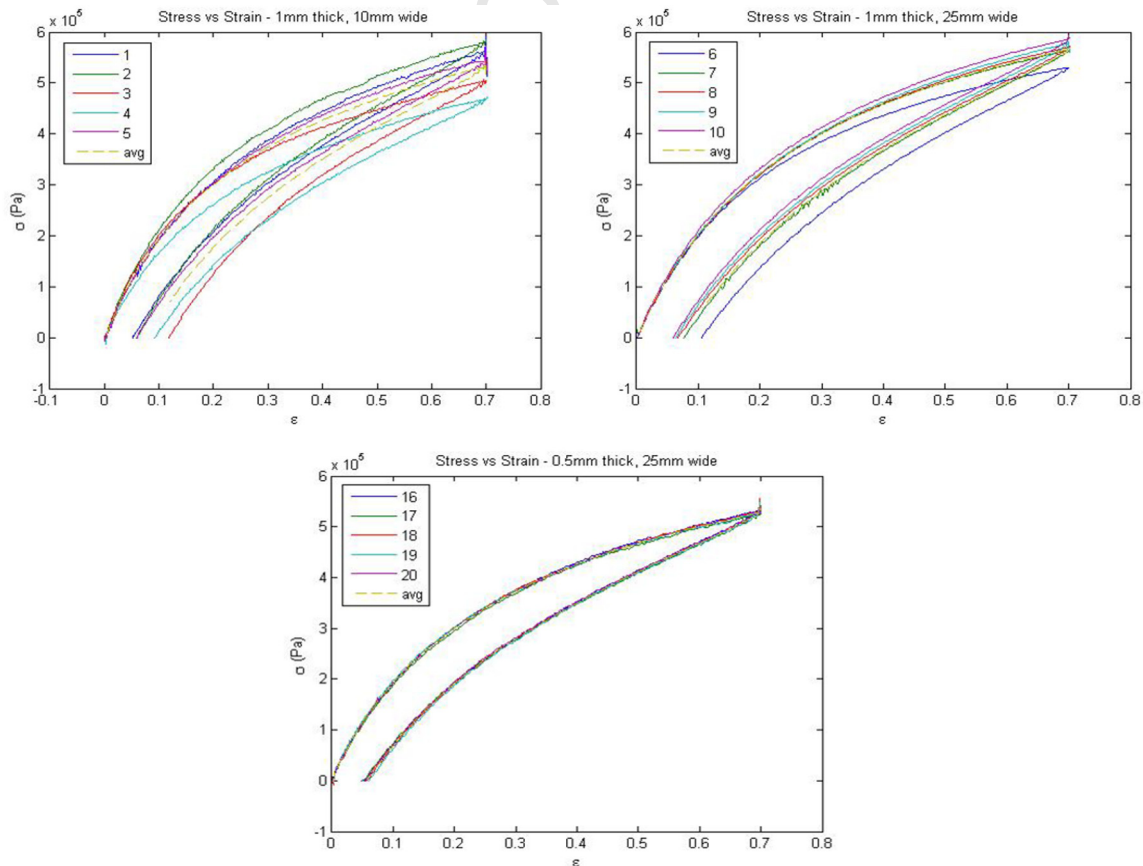


Fig. 7. Stress strain curves of the different Latex specimens

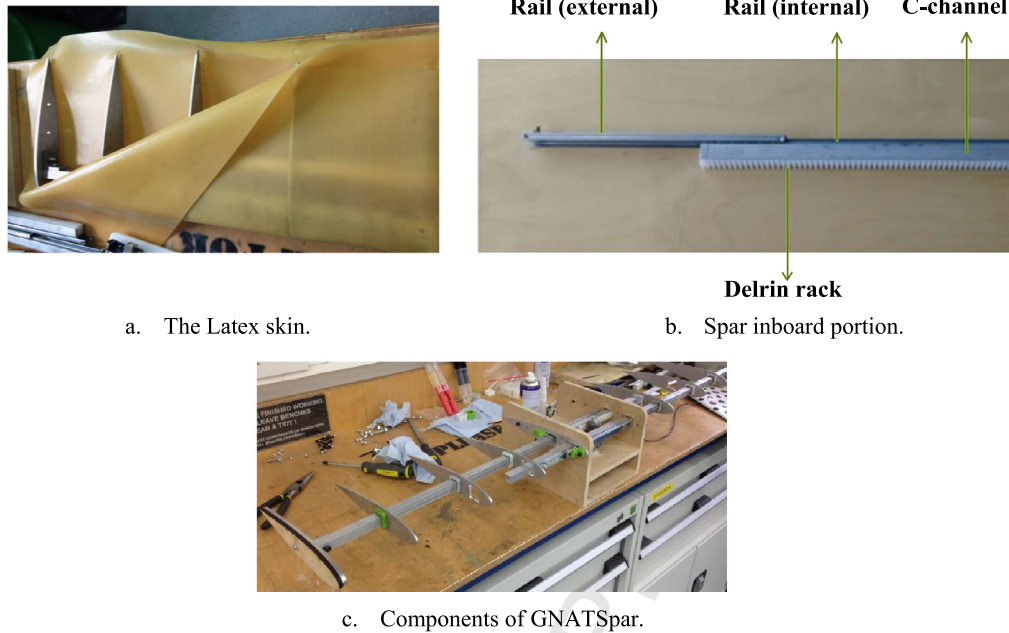

a. The Latex skin.

b. Spar inboard portion.

c. Components of GNATSpar.

Fig. 8. Assembly and integration of GNATSpar.



Fig. 9. Skin-ribs clamping mechanism.

4.2. Assembly and integration

Following Latex uniaxial testing, 0.5 mm thick Latex sheet was chosen to act as the morphing skin (Fig. 8a). The loads from the skin are transferred to the spar through ribs. On each side of the wing there is 5 ribs. The root ribs are fixed to the wooden fuselage frame and each spar is attached to both root ribs (to maximise its bending stiffness) via a steel rail that allows the spar to slide relative to these ribs (Fig. 8b). The rails transfer the loads from the spars to the wooden fuselage and maintain the chordwise positions of the spars.

The tip rib is fixed to the end of the spar while the other three intermediate ribs are attached to the spar via ball bearings so they can slide on the spar in the spanwise direction. The sliding ribs transfer the aerodynamic loads from the skin to the wing spar and they are equally spaced from each other. The skin is bonded using epoxy to the ribs as shown in Fig. 8a. As the span extends, the spar and hence the tip rib (on each side of the wing) start moving. As the tip rib moves it forces the skin to extend. The bond between the sliding ribs and the skin slides and keeps these ribs spaced evenly apart to maintain uniform strain of the skin along the span. Since the spar has a square cross-section, it was difficult to find suitable ball bearings to allow the ribs to slide it. Therefore, ball bearing frames with square cross-sections were 3D printed from ABS, lubricated and fitted with mini-balls. The spars

are Aluminium, square cross-section beams where the inboard portion of each spar is machined to achieve a C-channel cross-section. In the C-channel, Delrin racks are housed (bonded and screwed) for actuation purposes.

The joint between the skin and the root rib and between the skin and the tip rib experience large shear stresses due to the elastic loads of the skin as the span extends. To maximise the shear strength of these joints, the root and tip ribs (on each side of the wing) are split into two minor ribs each. The skin is bonded on the top, bottom, and one side (depth of the rib) of one of the minor ribs (tip and root). This maximises the bonding contact area between the skin and the minor ribs. Then the minor ribs are bolted together to clamp the skin between them and increase the shear strength of the joint as shown in Fig. 9.

Fig. 10 shows the wing in the unmorphed position and in the fully extended position. It is evident from Fig. 10 that the motor selected is capable of morphing the skin by up to 20% and that the skin joints at the root and tip are reliable due to the clamping mechanism developed.

Fig. 11 shows a close-up of the wing in its fully extended state. The skin deflection along the chordwise direction is large due to the large Poisson's ratio of Latex. Future investigation based on this paper will look at the possibility of adding chordwise running carbon fibres to the flexible skin to minimise the Poisson's ratio effect.

4.3. Control system

Fig. 12 shows the setup of a robust control system developed for the GNATSpar. It consists of an Arduino Uno R3 microcontroller and two relay switches that help the microcontroller switching the motor on and off and changing its rotational direction. This control system allows only symmetric span extensions but can be adjusted to allow for asymmetric extensions. Three span extension configurations, corresponding to 0%, 10% and 20%, are set in the controller

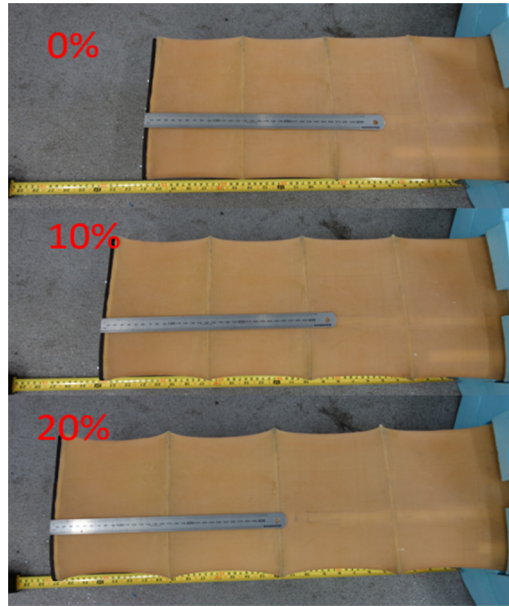


Fig. 10. GNATSpar at different span extensions.



Fig. 11. Poisson's contraction of the skin when fully extended.

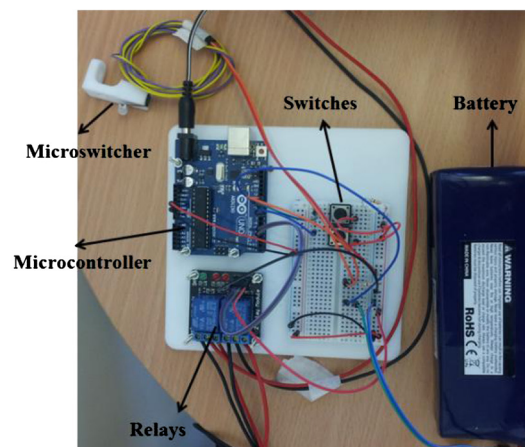


Fig. 12. The control system for the GNATSpar.

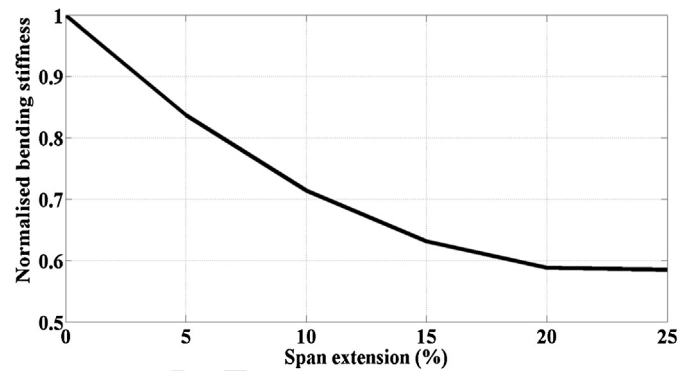


Fig. 13. Bending stiffness of the GNATSpar versus span extension.

as stages or modes. Ideally, a control system would autonomously vary the wing span to match the instantaneous flight conditions and operational requirements. A micro-switcher at the end of each rail (root ribs) is installed and silicon bumps are created on the sides of each spar in the defined positions (0%, 10%, and 20%). As the spar extends and reach one of the defined positions, the micro-switcher toggles to send a 5 V impulse to the microcontroller. Two push button switches are used to command the actuation in both directions (extension and retraction). The actuation is terminated when both micro-switchers are pushed by the positioned bumps. Finally, a nano-tech 4 cell 14.8 V, high discharge, LiPo battery is used to power the GNATSpar.

It takes 18.5 seconds to extend the wingspan by 20%. According to Ajaj et al. [16,17], this actuation time is acceptable for symmetric span morphing used to enhance flight performance (but not for asymmetric morphing used for roll control) especially that this actuation time is less than 0.2% of the UAV's endurance. The DC motor has a built-in gearbox (Fig. 12) that significantly reduces its rotational speed but maximises torque, which is optimum for stretching the skin.

4.4. Mechanical testing

Mechanical testing is performed to determine the variation of bending stiffness with span extension. A 3 kg load is applied on the wingtip (tip rib) and the wingtip out-of-plan deflections are measured for the different extensions. Fig. 13 shows the variation of the normalised bending stiffness of the GNATSpar wing with span extension. It should be noted that the 3 kg tip load generates higher bending loads on the wing root than the 1-g flight condition.

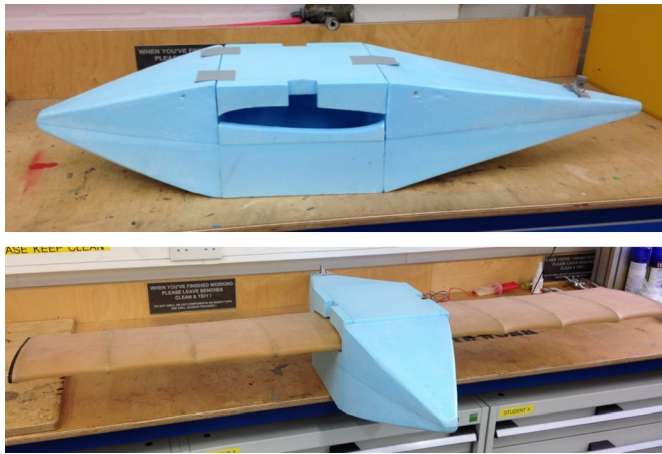


Fig. 14. The GNATSpar integrated in the mini-UAV.

At 20% span extension, the bending stiffness of the GNATSpar drops by 40%. This drop has a significant impact on the aeroelastic behaviour of the wing.

4.5. Wind-tunnel testing

Following the mechanical testing, wind-tunnel testing is performed. The high-speed section of the 7' × 5' wind-tunnel at the University of Southampton is used. A representative fuselage cover made from foam is manufactured modularly to house both the GNATSpar wing and the wooden fuselage frame and maintain smooth aerodynamic profile around them as shown in Fig. 14.

The model setup in the wind-tunnel is shown in Fig. 15. The high-speed section of the tunnel uses a 3-component weight beam balance in the tunnel roof.

Three span extensions corresponding to 0%, 10% and 20% are considered during wind-tunnel testing. For each span extension, the AOA is varied from 0° to 20° with a step of 5° and the airspeed is varied from 10 m/s to 20 m/s with a step of 5 m/s. The testing is performed quasi-statically where the wingspan is extended to the desired position before the wind-tunnel testing commences. Fig. 16 shows the aerodynamic efficiency of the GNATSpar wing for different span extension at different operating conditions.

It is evident from Fig. 16 that span extension increases the aerodynamic efficiency of the UAV. It should be noted that for a 20% span extension at 20 m/s, the wing aeroelastic deformations become large and if the airspeed is increased to 25 m/s the wing started fluttering due to the large aerodynamic loads and lower stiffness of the wing. This was noticed during testing but was

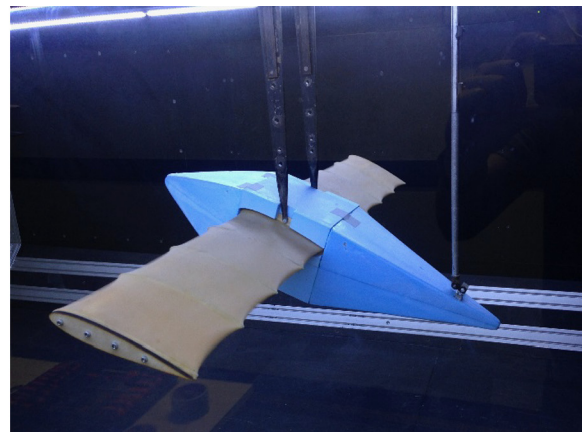
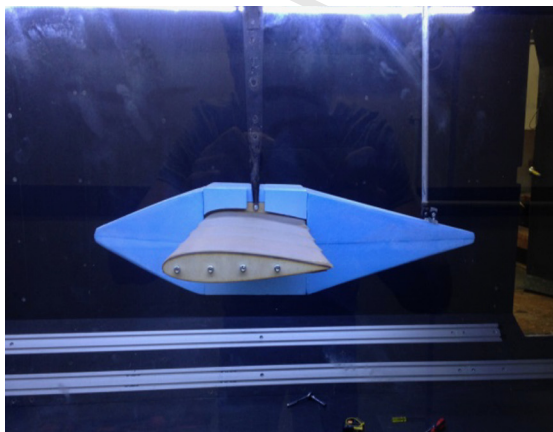


Fig. 15. The GNATSpar wing in the 7' × 5' wind-tunnel.

not considered further because the UAV is not designed to fly at 25 m/s. The overall aerodynamic efficiency of the model is low due to the fuselage configuration being an aerodynamically inefficient, bluff body. However, the aim of the study is not to design an optimum fuselage configuration but to capture the sensitivity of the aerodynamic efficiency to span extension. It should be noted that stretching the flexible skin has an impact on the effective camber of the wing as shown in Fig. 16. As the span extends and the skin stretches, α_0 the zero lift angle of attack, increases as well.

5. Conclusions

The Gear driveN Autonomous Twin Spar (GNATSpar) was designed, manufactured, integrated and tested. The GNATSpar is superior to conventional telescopic and articulated structures as it uses the space available in the opposite sides of the wing instead of relying on overlapping structures and bearings. In addition, it has a self-locking actuation mechanism due to the low lead angle of the driving worm gear. This reduces the actuation power required to morphing the wing and maintains it in the desired position. Following the preliminary aero-structural sizing of the concept, a physical prototype is developed and tested in the 7' × 5' wind-tunnel at the University of Southampton. The span extension increased the aerodynamic efficiency of the UAV. The GNATSpar requires relatively large force required to morph the wing with the flexible skin. 55 N actuation force was required to morph the wing semispan by 20%. One potential solution to reduce the actuation force is the use of flexible skin with lower Young's modulus such as Tecoflex and Rhodorsil V-330/CA-35 Silicone elastomers. In addition, as the wing extends the shape of the aerofoil along the span becomes non-uniform due to the Poisson's contractions. Future work will focus on building three of non-morphing, rigid wings with spans corresponding to 0%, 10% and 20% span extensions. These wings will have with rigid skins. Wind-tunnel testing of these wings will be conducted and aerodynamic efficiency will be measured. This will allow estimating the impact of the flexible skin on the aerodynamic efficiency of the wing.

Conflict of interest statement

None declared.

Acknowledgements

M. Bouchak and W. Harasani received funding from the Deanship of Scientific Research (DSR) at King Abdulaziz University, Jeddah, under Grant No. 431/009; therefore, they wish to acknowledge and thank DSR for technical and financial support. Furthermore,

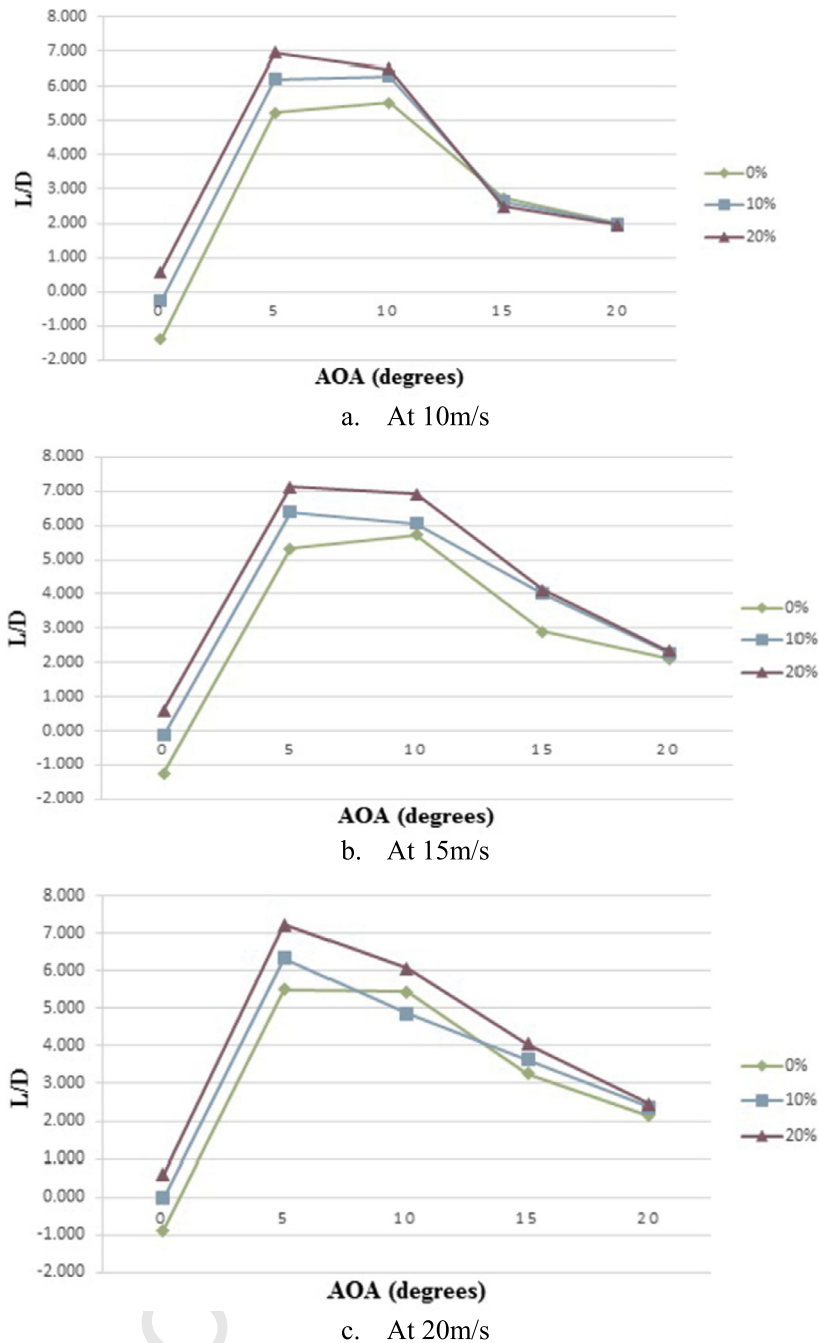


Fig. 16. Aerodynamic efficiency versus AOA for different span extensions.

M. Bouchak and W. Harasani would like to express their gratitude and appreciation to Tokai University for its technical help and support.

Uncited references

[14]

References

- [1] R.M. Ajaj, A.J. Keane, C.S. Beaverstock, M.I. Friswell, D.J. Inman, Morphing aircraft: the need for a new design philosophy, in: 7th Ankara International Aerospace Conference, Ankara, Turkey, 11–13 Sep. 2013, 2013.
- [2] R.M. Ajaj, C.S. Beaverstock, M.I. Friswell, Morphing aircraft: the need for a new design philosophy, *Aerosp. Sci. Technol.* 49 (February 2016) 154–166.
- [3] B.W. McCormik, *Aerodynamics, Aeronautics and Flight Mechanics*, 2nd edition, Wiley, New York, 1995.
- [4] T.A. Weisshaar, *Morphing aircraft technology – new shapes for aircraft design*, RTO-MP-AVT-141, Neuilly-sur-Seine, France, 2006.
- [5] J. Blondeau, D. Pines, Design and testing of a pneumatic telescopic wing for unmanned aerial vehicles, *J. Aircr.* 44 (4) (2007).
- [6] J. Blondeau, J. Richeson, D.J. Pines, Design, development and testing of a morphing aspect ratio wing using an inflatable telescopic spar, in: 44th AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics and Materials Conference, Norfolk, VA, 2003, AIAA 2003-1718.
- [7] T.G. Ivanko, R.C. Scott, M.H. Love, S. Zink, T.A. Weisshaar, Validation of the Lockheed Martin morphing concept with wind tunnel testing, in: 48th AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics, and Materials Conference, Honolulu, Hawaii, 2007, AIAA 2007-2235.
- [8] D.R. Bye, P.D. McClure, Design of a morphing vehicle, in: 48th AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics, and Materials Conference, 23–26 April, Honolulu, HI, 2007, AIAA 2007-1728.
- [9] M.H. Love, P.S. Zink, R.L. Stroud, D.R. Bye, S. Rizk, D. White, Demonstration of morphing technology through ground and wind tunnel tests, in: 48th AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics, and Materials Conference, Honolulu, Hawaii, 2007, AIAA 2007-1729.

- 1 [10] J.S. Bae, T.M. Seigler, D.J. Inman, Aerodynamic and aeroelastic characteristics of
2 a variable-span morphing wing, *J. Aircr.* 42 (2) (2005) 528–534. 67
- 3 [11] R.M. Ajaj, E.I. Saavedra Flores, M.I. Friswell, G. Allegri, B.K.S. Woods, A.T. Isikv- 68
4 eren, W.G. Dettmer, The zigzag wingbox for a span morphing wing, *Aerosp.*
5 *Sci. Technol.* 28 (1) (2013) 364–375, [http://dx.doi.org/10.1016/j.ast.2012.12.](http://dx.doi.org/10.1016/j.ast.2012.12.002) 69
6 [002](http://dx.doi.org/10.1016/j.ast.2012.12.002). 70
- 7 [12] R.M. Ajaj, E.I. Saavedra Flores, M.I. Friswell, F.A. DiazDelaO, Span morphing using
8 the compliant spar, *J. Aerosp. Eng.* 1 (13) (2014), [http://dx.doi.org/10.1061/](http://dx.doi.org/10.1061/(ASCE)AS.1943-5525.0000442) 71
9 [AS.1943-5525.0000442](http://dx.doi.org/10.1061/(ASCE)AS.1943-5525.0000442). 72
- 10 [13] S. Barbarino, O. Bilgen, R.M. Ajaj, M.I. Friswell, D.J. Inman, A review of morph- 73
11 ing aircraft, *J. Intell. Mater. Syst. Struct.* 22 (9) (June 2011) 823–877. 74
- 12 [14] T. Megson, *Aircraft Structures for Engineering Students*, 4th edition, 75
13 Butterworth–Heinemann, UK, Oxford, 2007. 76
- 14 [15] D. Howe, *Aircraft Loading and Structural Layout*, St Edmunds: Professional En- 77
15 gineering Publishing, 2004. 78
- 16 [16] R.M. Ajaj, M.I. Friswell, E.I. Saavedra Flores, A.J. Keane, A.T. Isikveren, G. Allegri, 79
17 S. Adhikari, An integrated conceptual design study using span morphing tech- 80
18 nology, *J. Intell. Mater. Syst. Struct.* 25 (8) (2014) 989–1008, [http://dx.doi.org/](http://dx.doi.org/10.1177/1045389X13502869) 81
19 [10.1177/1045389X13502869](http://dx.doi.org/10.1177/1045389X13502869). 82
- 20 [17] R.M. Ajaj, M.I. Friswell, E.I. Saavedra Flores, O. Little, A.T. Isikveren, Span mor- 83
21 phing: a conceptual design study, in: 20th AIAA/ASME/AHS Adaptive Structures 84
22 Conference, 23–26th April, Honolulu, Hawaii, USA, 2012, AIAA-2012-1510. 85
23 86
24 87
25 88
26 89
27 90
28 91
29 92
30 93
31 94
32 95
33 96
34 97
35 98
36 99
37 100
38 101
39 102
40 103
41 104
42 105
43 106
44 107
45 108
46 109
47 110
48 111
49 112
50 113
51 114
52 115
53 116
54 117
55 118
56 119
57 120
58 121
59 122
60 123
61 124
62 125
63 126
64 127
65 128
66 129
130
131
132

UNCORRECTED PROOF