

From the headwater to the delta: a synthesis of the basin-scale sediment load regime in the Changjiang River

Leicheng Guo ^a, Ni Su ^{b, *}, Ian Townend ^{a, c}, Zheng Bing Wang ^{a, d, e}, Chunyan Zhu ^{a, d}, Xianye Wang ^a, Yuning Zhang ^a, Qing He ^a

^a State Key Lab of Estuarine and Coastal Research, East China Normal University, Dongchuan Road 500, Shanghai 200241, China

^b State Key Lab of Marine Geology, Tongji University, Siping Road 1239, Shanghai 200090, China

^c School of Ocean and Earth Sciences, University of Southampton, Southampton, UK

^d Department of Hydraulic Engineering, Faculty of Civil Engineering and Geosciences, Delft University of Technology, Delft 2600GA, the Netherlands

^e Marine and Coastal Systems Department, Deltares, Delft 2629HV, the Netherlands

* Correspondence author, E-mail: nsu@tongji.edu.cn, Tel: +86 21 6598 2208

Highlights

1. We provide a comprehensive synthesis of basin-scale behavior of sediment load regime in the Changjiang River.

2. Sediment loads have declined to insignificant quantities at majority of gauges.

3. Dramatic sediment connectivity and source-to-sink changes are identified.

Abstract

Many large rivers in the world delivers decreasing sediment loads to coastal oceans owing to reductions in sediment yield and disrupted sediment deliver. Understanding the sediment load regime is a prerequisite of sediment management and fluvial and deltaic ecosystem restoration. This work examines sediment load changes across the Changjiang River basin based on a long time series (1950–2017) of sediment load data stretching from the headwater to the delta. We find that the sediment loads have decreased progressively throughout the basin at multiple time scales. The sediment loads have decreased by ~96% and ~74% at the outlets of the upper basin and entire basin, respectively, in 2006–2017 compared to 1950–1985. The hydropower dams in the mainstem have become a dominant cause of the reduction, although downstream channel erosion causes moderate sediment load recovery. The basin-scale sediment connectivity has declined as the upper river is progressively dammed, the middle-lower river is leveed and river-lake interplay weakens. The middle-lower river has changed from a slight depositional to a severe erosional environment, from a sediment transport conduit to a new sediment source zone, and from a transport-limited to a supply-limited condition. These low-level sediment loads will likely persist in the future considering the cumulative dam trapping and depleted channel erosion. As a result, substantial hydro-morphological changes have occurred that affect the water supply, flood mitigation, and the aquatic ecosystem. The findings and lessons in this work can shed light on other large river systems subject to intensified human interference.

Key words: Sediment load; Source-to-sink; Sediment starvation; Changjiang

1. Introduction

Larger rivers deliver most of the terrestrial flux of sediment to the coastal oceans and seas. Past estimates suggest that a total sediment discharge of approximately 15-20 billion tons per year comprises 95% of the sediment entering the oceans (Milliman and Ren, 1995; Syvitski et al., 2005). This large-scale flux plays a significant role in land-ocean interactions, particularly with respect to carbon and pollution exchange (Milliman and Meade, 1983; Syvitski et al., 2005).

Under the impacts of climate change and human activities, many of the world's large rivers have experienced a measurable decrease in sediment flux over the past few decades (Walling and Fang, 2003; Vörösmarty et al., 2003; Syvitski et al., 2005). Numerous case studies of these impacts have been well documented (Dynesius and Nilsson, 1994; Walling, 2006; Yang et al., 2015). Consequently, many large delta systems are experiencing increased erosion, loss of salt marshes, and flooding of the immediate hinterland, which poses an increasing threat to human life in these areas (Syvitski and Saito, 2007). This decrease in sediment flux is accompanied by a reduction of particulate nutrient loading from rivers to oceans, thus affecting the land-ocean biogeochemical cycling and coastal ocean ecosystems (Syvitski et al., 2005). It is thereby of vital importance to understand the magnitude, direction, and timescales of sediment load changes in order to provide a quantitative basis for defining management constraints and identifying restoration opportunities (Hoffmann et al., 2010).

As one of the world's largest river systems, the Changjiang River basin (CRB) is of major ecological and socioeconomic significance. The amount of sediment delivered to the delta in 1950-1983 was $471.4 \pm 72.5 \text{ Mt yr}^{-1}$ according to the Datong gauge (Figure 1), which accounted for ~4.5% of the global terrestrial sediment flux (Milliman and Meade, 1983). Formerly an aggradational system, the CRB had been subjected to sediment-related management challenges including severe surface soil erosion, rapid reservoir

178
179
180
181 84 sedimentation and loss of storage capacity, channel aggradation and
182 85 sedimentation in natural lakes (Yang et al., 2006, 2014; Wang et al., 2007). For
183 86 centuries, flood mitigation has been the focus of river management in the CRB.
184 87 Although this has remained an important issue, several other activities
185 88 including land use changes and dam construction during the last century have
186 89 begun to have a far greater impact. These activities have collectively led to a
187 90 reduction in sediment loads, and the associated sediment deficit has led to
188 91 channel degradation, loss of wetland and habitats, and delta erosion (Yang et
189 92 al., 2011, 2018). Although the overall decrease in sediment load is well known,
190 93 the spatial and temporal nature of these changes has not been studied in detail
191 94 at the basin scale. Such an understanding can provide important insight for
192 95 future management of the river basin, which is the focus of this study.

202 96 A huge amount of research has been devoted to studying sediment load
203 97 changes in the CRB. Shi et al. (1985) and Gu and Ian (1989) examined
204 98 sediment yield patterns and sediment load changes in the upper basin.
205 99 Following their research, Yang et al. (2006, 2011, 2018), Wang et al. (2007,
206 100 2008), Hu et al. (2009), Xu and Milliman (2009), Hassan et al. (2011), Dai and
207 101 Lu (2014), and Guo et al. (2018) have documented the sediment load
208 102 reductions that have been ascribed to reforestation measures and hydropower
209 103 dams including the Three Gorges Dam (TGD). Liu and Zuo (1987), Li et al.
210 104 (2013), Dai and Lu (2014), Xu et al. (2013), Zheng (2016), and Yang et al.
211 105 (2018) have discussed the impacts of the TGD on the river system with respect
212 106 to river and sediment discharges, ecological and environmental issues, and
213 107 social and economic aspects. However, several inconsistencies are present
214 108 regarding the pattern of sediment load changes and the impact of land use
215 109 changes (Dai and Lu, 2014), which can be ascribed to inconsistent data and/or
216 110 different analysis methods at different significance levels. Furthermore, past
217 111 studies have mainly examined the sediment load regime in part of the river
218 112 system, e.g., the middle-lower river downstream of the TGD (Figure 1). To the
219 113 best of our knowledge, basin-wide sediment load changes have not been
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236

documented and remain insufficiently understood.

Construction of the TGD was completed in 2003 and this was followed by a pilot operation period from 2003 to 2008. Almost a decade of recent data recorded since the dam became fully operational provides an opportunity for rigorous assessment of the dam's impact on sediment delivery. Following the completion of the TGD, more hydropower dams have been constructed along the mainstem. Therefore, we provide in this work a comprehensive synthesis of the sediment flux regime and its changes based on re-examination of a long time series of sediment load data over the interval 1950-2017 throughout the CRB from the headwater to the delta. This provides an integrated picture of the spatial patterns of sediment flux and its changes over time. In addition, we attempt to clarify the causes and interpret the river-system responses with respect to fluvial hydro-morphological adaptations, and we examine the changes in network connectivity and the disposition of sediment sources and sinks. These insights are expected to clarify river management strategies. The findings also have relevance for global terrestrial sediment flux and land-to-ocean interactions in similarly large river systems.

2. The Changjiang River and data sources

2.1 Introduction to the Changjiang River

Stretching west-eastward in the middle of China, the Changjiang River is one of the world's largest rivers in terms of mainstem length (~6,300 km), drainage area (1.9 million km²), and streamflow. According to data recorded between 1950 and 2005 at Datong, the streamflow was 903.4 ± 124.6 billion m³ yr⁻¹, and the sediment load was 413.8 ± 103.4 Mt yr⁻¹. The CRB is home to ~480 million people and contributed to 41.6% of the national gross domestic product (GDP) in 2015, which demonstrates its critical role in national socioeconomic development (Chen et al., 2017).

The CRB has highly significant spatial variations in landscape, rock type, land use, climate pattern, and precipitation. The CRB is geographically divided

into upper and middle-lower sub-basins and a delta region with divisions at Yichang (1,770 km upward from Xuliujing, head of the delta, the same definition of along-river distance applies throughout this work) and Datong (500 km) based on varying hydrological and geomorphologic features (Figure 1). The upper basin has a high relief at 3,000-5,000 m and is basically mountainous with wide-spread gullies and gorges (Figures 1a and 1b). The axial river gradient between Zhimenda and Pingshan is ~ 0.0013 . The headwater zone upstream of Batang, i.e., the Tibetan Plateau, is characterized by a persistently cold climate and low precipitation (Wang et al., 2007). The river reach between Batang and Pingshan, also referred to as the Jinsha River, is composed of gullies and gorges in a hot and dry climate with poor vegetation coverage. The region between Pingshan and Yichang has a relatively low relief compared with the headwater zone (Figure 1b); its landscape includes high mountains and canyons with a high precipitation. The middle-lower basin between Yichang and Datong consists of a low-lying floodplain with a wet and warm climate pattern. The reach between Zhicheng (~ 60 km downstream of Yichang) and Luoshan, referred to as the Jing River, is a highly meandering river, with complex river networks that connects to the natural Dongting Lake. The middle-lower river overall has a gentle bed slope with a mean river gradient of ~ 0.00011 . Influenced by the Asian monsoon, the annual precipitation is 270-500 mm in the upper CRB and 1,600-1,900 mm in the middle-lower basin (Gemmer et al., 2008; Wang et al., 2012). The river downstream of Datong is influenced by oceanic tides, whereas the region seaward of Xuliujing is dominated by bidirectional tidal currents and is defined as a delta zone.

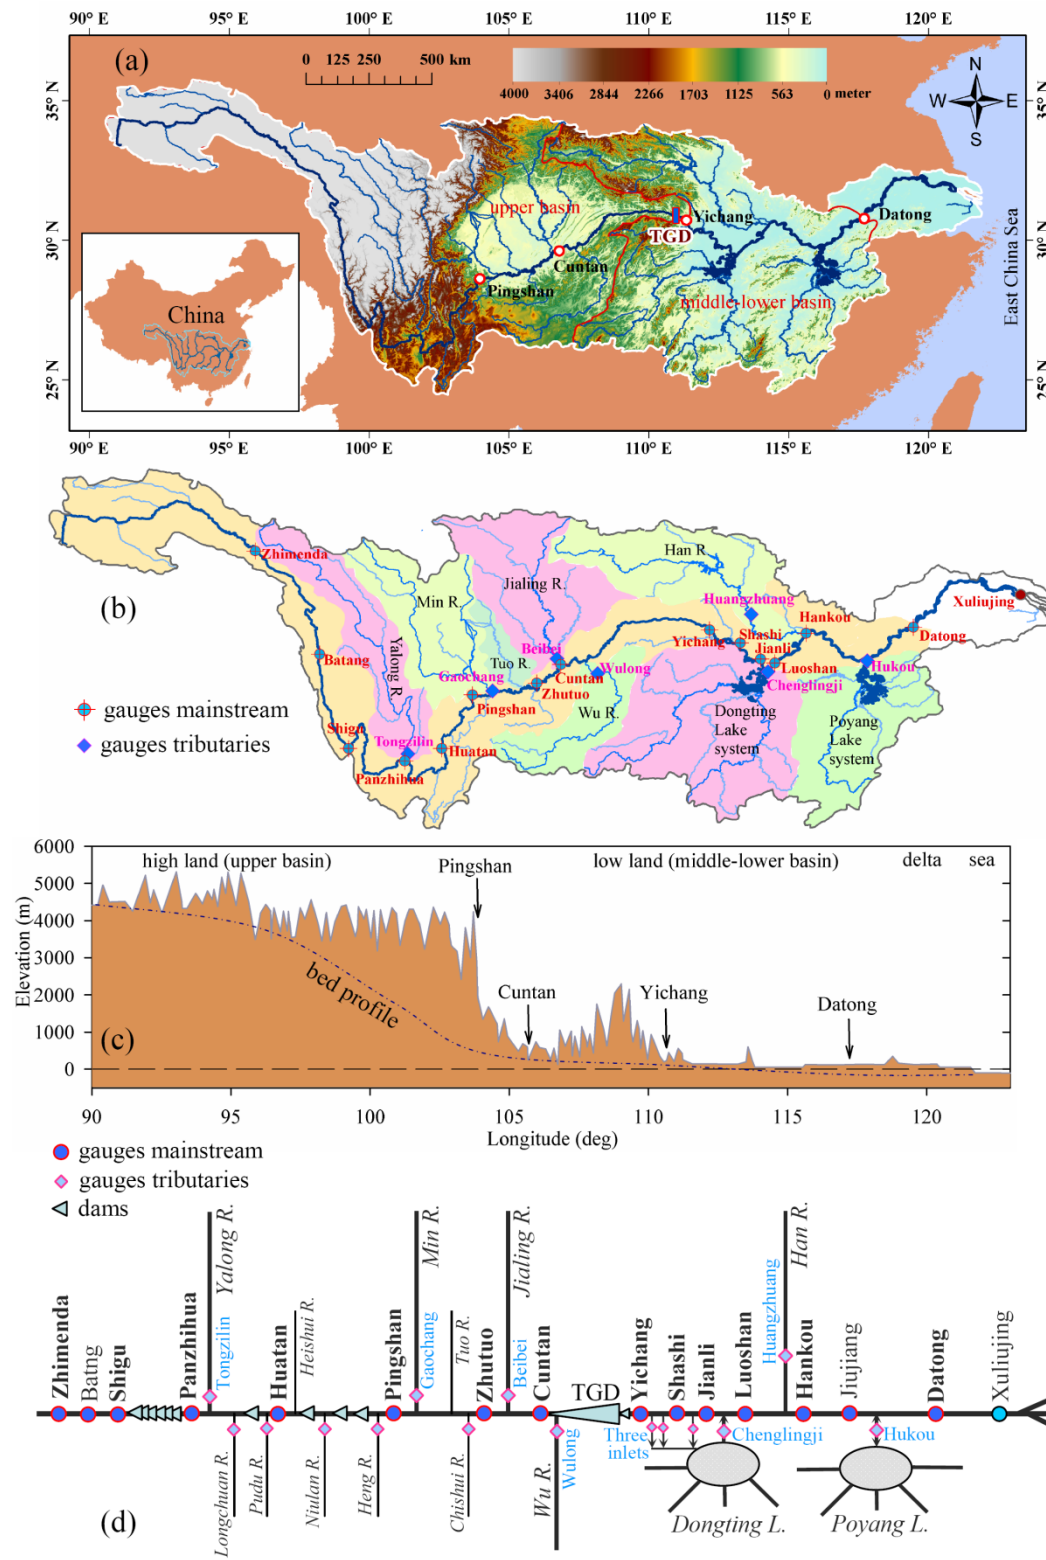


Figure 1. (a) A DEM and boundaries of the upper and middle-lower sub-basins, (b) the division of tributary basins and the location of gauge stations, (c) Longitudinal elevation changes, and (d) a sketch showing the relative positions of the gauges and large dams in the mainstream. TGD indicates the Three Gorges Dam.

A number of tributaries form part of the CRB, including the Yalong, Min, Jialing, Wu, and Han rivers and two natural lake systems: the Dongting and Poyang lakes (Figure 1 and Table 1). The Dongting Lake receives flows from four secondary tributaries and connects to the mainstem at Chenglingji. In addition, three inlets are located between Yichang and Jianli where mainstem water and sediment are diverted into the Dongting Lake (Figure 1d). The Poyang Lake has five secondary tributaries and connects to the mainstem at Hukou. Reverse flows and associated sediments, i.e., flows from the mainstem to the Poyang Lake, occur occasionally at Hukou during the wet season. In addition, a few small tributaries with a smaller drainage area but a high sediment yield are present, including the Longchuang, Pudu, Heishui, Niulan, Heng, Tuo, and Chishui rivers (Figure 1d). These small rivers were generally excluded in previous studies of the sediment budget due to data scarcity. However, the reduction in sediment loads of the large tributaries means that the sediment sources of these smaller tributaries probably have become significant for the sediment budget.

2.2 Data

Instrumental data of river discharge and sediment loads are readily available as hydrometric stations for monitoring river discharge were established at Hankou and Yichang in the 1860s, whereas sediment-load monitoring was initiated in 1923. More generally consistent sediment load data from sites across the river basin beginning in 1950 are available despite several gaps in the early 1950s (Table 1). The annual streamflow and sediment load data used in the present study were collected from government websites (<http://xxfb.hydroinfo.gov.cn>), yearbooks and bulletins (CWRM, 2001-2018; <http://www.mwr.gov.cn/sj/tjgb/zghlnsgb/>), and the literature (Yang et al., 2006; Wang et al., 2008; Guo et al., 2018). The Hydrology Bureau of the Changjiang Water Resources Commission conducts measurements that are

performed following widely accepted standards; thus, all data are quality controlled (Wang et al., 2007).

Table 1. Drainage area, streamflow and sediment loads in the sub-basins (bold) and tributaries (italics) of the CRB. The streamflow and sediment loads are the multi-year averaged values of the entire data range with one standard deviation.

| River name | Gauge | Drainage area (km ²) | Streamflow (billion m ³) | Sediment load (million tons) | Data range |
|----------------------|---------------------------------|----------------------------------|--------------------------------------|------------------------------|----------------|
| Upper river | Zhimenda | 137,700 | 13.1±3.6 | 9.5±5.9 | 1957-2017 |
| Upper river | Batang | 187,507 | 29.0±5.8 | 13.1 ^a | 1960-2017 |
| Upper river | Shigu | 214,184 | 42.6±6.8 | 25.3±12.5 | 1958-2017 |
| Upper river | Panzhihua | 259,177 | 56.3±8.9 | 46.5±25.2 | 1966-2017 |
| <i>Yalong R.</i> | <i>Tongzilin¹</i> | 118,294 | 59.1±9.7 | 24.4±15.1 | 1961-2017 |
| <i>Longchuang R.</i> | <i>XiaoHGY</i> | 9,225 | 0.7±0.5 | 4.3±3.5 | 1963-2017 |
| <i>Pudu R.</i> | <i>Sanjiangkou</i> | 11,657 | 3.5 | 5.3 | - ^b |
| Upper river | Huatan | 425,949 | 125.3±20.8 | 160.2±68.9 | 1958-2017 |
| <i>Heishui R.</i> | <i>Ningnan</i> | 3,530 | 2.2±0.4 | 4.7±2.9 | 1959-2016 |
| <i>Niulan R.</i> | <i>Xiaohu</i> | 13,672 | 4.8 | 11.7 | - ^b |
| <i>Heng R.</i> | <i>Hengjiang</i> | 14,800 | 8.6±1.7 | 12.1±6.3 | 1961-2016 |
| Upper river | Pingshan² | 458,592 | 142.4±21.8 | 215.4±107.7 | 1956-2017 |
| <i>Min R.</i> | <i>Gaochang</i> | 135,378 | 84.2±9.4 | 41.9±22.8 | 1956-2017 |
| <i>Tuo R.</i> | <i>Fushun</i> | 27,840 | 12.2±2.8 | 8.2±8.3 | 1957-2017 |
| <i>Chishui R.</i> | <i>Chishui</i> | 20,440 | 9.7 | 7.1 | - ^b |
| Upper river | Zhutuo | 694,700 | 263.6±31.2 | 267.5±111.4 | 1956-2017 |
| <i>Jialing R.</i> | <i>Beibei</i> | 156,142 | 65.1±16.5 | 93.8±78.2 | 1956-2017 |
| Upper river | Cuntan | 866,559 | 342.9±39.4 | 366.0±164.4 | 1950-2017 |
| <i>Wu R.</i> | <i>Wulong</i> | 83,035 | 48.5±9.2 | 22.2±14.9 | 1956-2017 |
| Upper river | Yichang | 1,005,500 | 429.4±47.1 | 391.2±220.3 | 1950-2017 |
| Middle river | Shashi | - | 391.0±37.8 | 347.2±187.1 | 1956-2017 |
| <i>Dongting L.</i> | <i>Three inlets³</i> | - | 80.5±34.6 | 95.5±72.2 | 1956-2017 |
| Middle river | Jianli | - | 356.6±42.5 | 294.2±140.2 | 1951-2017 |
| <i>Dongting L.</i> | <i>Chenglingji</i> | 262,340 | 285.2±62.1 | 37.9±18.4 | 1951-2017 |
| Middle river | Luoshan | 1,294,910 | 635.9±74.1 | 333.5±156.3 | 1954-2017 |
| Middle river | Hankou | 1,488,000 | 708.4±88.7 | 327.1±144.8 | 1953-2017 |
| <i>Han R.</i> | <i>Huangzhuang</i> | 142,056 | 46.3±16.3 | 42.2±53.2 | 1951-2017 |
| <i>Poyang L.</i> | <i>Hukou</i> | 162,200 | 152.4±43.2 | 10.4±4.7 | 1952-2017 |
| Lower river | Datong | 1,705,400 | 895.8±125.1 | 361.1±146.8 | 1951-2017 |

¹ Data based on Xiaodeshi (plus Wantan) station 6.5 km upstream of Tongzilin before the Ertan Dam was constructed in 1999.

² Data at Xiangjiaba since 2011 used due to construction of Xiangjiaba Dam

³ Three inlets diverting mainstem flow and sediment into the Dongting Lake.

^a Time series of sediment load data at Batang were not collected; only the mean value reported in Wang et al. (2007) is included for reference.

^b Time series of streamflow and sediment load data were not collected; only the mean values in Gu and Ian (1989), Pan (1997), and Wei et al. (2011) are included for reference.

Annual streamflow and sediment load data were collected throughout the CRB for the period 1950-2017, including 13 gauge stations along the mainstem stretching nearly 5,000 km, 12 large tributaries and 4 small tributaries, i.e., a compilation of recordings of ~1,680 station years (Figure 1d and Table 1). The occasional missing data were estimated by correlating the available data with the nearest complete gauge record, e.g., 1987, 1971, and 1970 are missing from Huatan, Zhutuo, and Shashi, respectively. To facilitate consistent comparison of the changes throughout the river, the data of 1956-2017 were analyzed in depth. Note that comparisons of sediment loads are made through time for individual rivers or gauges; the comparison between rivers is limited because of the unique chronology of changes within each sub-catchment, and the variable effect of those changes along the mainstem. In addition, some gauges were relocated because of dam construction or river regulations, e.g., Tongzilin was used to replace Xiaodeshi (plus Wantan) in the Yalong River in 2000, and Xiangjiaba replaced Pingshan in the mainstem in 2011 (Table 1). For our purposes, however, such relocations did not influence the data consistency because the displaced distances are small (e.g., Xiangjiaba is ~10 km downstream of Pingshan).

The annual sediment flux is estimated based on daily-monitored river discharge and suspended sediment concentration which has a measurement error range of 16% (Wang et al., 2007). The suspended sediments are composed mostly of fine material, i.e., silt and clay, with a median diameter of

0.02-0.05 mm. The mean median diameter of the suspended sediment decreased from 0.044 mm at Shigu to 0.031 mm at Pingshan, 0.022 mm at Yichang, and 0.017 mm at Datong in the period prior to 2000 (CWRM, 2003). The suspended sediments have become finer in the recent decade as trapping of coarser sediment by dams has increased. In contrast, the bed material is composed of coarse sands, gravels and pebbles with diameters greater than 10 mm in the upper CRB and mainly sands downstream of Yichang with grain sizes of 0.1-0.4 mm and a sand fraction >70% (Wang et al., 2009). The bed load transport flux, including both gravels and coarse sands, was 9.54 Mt yr⁻¹ at Yichang before the closure of the Gezhouba Dam and was reduced to 0.32-1.41 Mt yr⁻¹ thereafter in 1981-1987 (Zhou and Xiang, 1994; Wang et al., 2007). The bed load transport accounts for a small proportion of the total sediment load, at <5% (Chen et al., 2010), therefore, the bed load was not included in the sediment flux estimates.

2.3 Methods

Sediment budget was used to infer the sediment delivery pattern changes at within-reach scales. It provides a framework to link sediment sources, transport pathways, and sinks based on mass conservation (Kondolf and Matthews, 1991; Parsons, 2011; Hinderer, 2012). For example, the differences between the incoming sediment flux at Cuntan plus Wulong and the outgoing sediment flux of the TGD at Yichang were taken as the reservoir sedimentation. The incoming and outgoing sediment loads of the two lakes were used to interpret the net deposition or erosion within the lakes. Wang et al. (2007) provided a large-scale sediment budget analysis of the CRB. In this work, an in-reach sediment budget was used to indicate sediment deposition or erosion in different reaches along the main river. The sediment balance of a selected river reach considering sediment input, output and in-reach sediment storage or erosion can be written as follows (Hassan et al., 2010):

$$(I_C + I_T + I_E) - (O_C + O_M + O_D) = S + E ,$$

where I_C , I_T , and I_E are in-reach sediment input from upstream, tributaries, and channel erosion, respectively, and O_C , O_M , and O_D indicate in-reach sediment output at the downstream section, sediment losses from sand mining, and sediment losses from the mainstem to tributaries and floodplains, respectively. S indicates the in-reach sediment storage owing to sedimentation, and E indicates the error or uncertainty term.

The sediment input (I_C) and output (O_C) of the study reach were represented by measurements in the mainstem. Sediment sources from monitored large and small tributaries (I_T) were considered, whereas the other ungauged smaller tributaries remain the main unknown factors in the upper river basin. Channel erosion (I_E) in the upper mainstem was considered to be limited given the significant differences in the composition of the bottom sediments (~cm) and suspended sediments (<0.1 mm). Estimation of the sediment sources from channel erosion (I_E) was based on river morphological data and was considered only in the river downstream of Yichang in the post-TGD period (see section 4.1). Sediment mining (O_M) predominantly extracts relatively coarse sediments and therefore should not have a significant influence on the suspended transport of fine sediment. However, sand mining may increase channel erosion, causing I_E over and above the natural channel erosion. Information of sand mining and its quantity, location and time, is limited, which creates difficulties in quantifying the mass of the sediment extracted; this is exacerbated by additional undocumented sediment extraction. The amount of overbank sediment lost to adjacent floodplains along the middle-lower river is small under normal flow conditions because of the extensive levees present, although the amount could be considerable during large river floods (Xu et al., 2005). Overbank sediment loss to floodplains has not been quantified due to a lack of measurements during floods. The lack of information on ungauged small tributaries is considered to be the main source

of error (E) in the upper basin, and the undocumented sediment mining and overbank sediment losses are the main unknown sources in the middle-lower basin. Also note that the measurement uncertainties in suspended sediment, as well as the spatial variations in sediment bulk density, and unquantifiable uncertainty in the river bathymetric data also contribute to the E term. Despite these uncertainties, the sediment budget analysis is still informative (Kondolf and Matthews, 1991). In general, a sediment output ($O_C + O_D$) to input ($I_C + I_T$) ratio >1 indicates in-reach channel erosion, and a ratio <1 indicates in-reach sedimentation; a ratio close to 1 indicates a state with little erosion and sedimentation (close to equilibrium).

We used change-point analysis (Hurst, 1951; Buishand, 1982; Taylor, 2000) to test for non-linear trends in normalized anomalies and to detect change points. The cumulative function T is defined such that its values are calculated as $T_i = T_{i-1} + (\bar{X} - X_i)$; X_i , $i=1, 2, \dots, N$ is the time series of normalized anomaly; and \bar{X} is the mean value. The mean value for the period 1950-1985 was used as the normalization reference unless otherwise stated. A potential change point is detected when a change in the direction of the T function occurs, where the interval of occurrence is defined by the parameter $T_{diff} = \ln(T_{max}) - \ln(T_{min})$, in which $\ln(\cdot)$ indicates the indices of the maximal (T_{max}) and minimal T (T_{min}). Statistical significance of the identified change points was verified by using a bootstrapping technique at the 5% ($p < 0.05$) significance level (Castino et al., 2016). This was achieved by conducting the above analysis on the synthetic sequences of annual sediment load based on a random resampling of the original time series data. The level of significance is given by the percentage of bootstrap cycles for which the synthetic T_{diff} parameter is greater than the observed one. Once a primary statistically significant change point was obtained, the same procedure was applied to the sub-time series of the X variable before and after the change point to search for secondary change points. Then Student's t test and Mann-Kendall (MK)

test at 5% significance level were used to determine the statistical significance of the linear trend between the change points (Mann, 1945; Kendall, 1948).

3. Results

3.1 Sediment loads in the tributaries

The sediment loads of the large tributaries exhibit a predominant negative trend (Figures 2 and 3). For example, a 70% sediment load reduction occurred in the Yalong River in 1998-2017 compared with 1980-1997 data, showing a statistically significant change point in 1998, because of the Ertan Dam in 1991-1998-2000, where the three-year convention indicates the years when dam construction started, the water storage commenced, and the construction was finished, respectively; this particular three-year convention was adopted throughout this work. In the Min River, stepwise reductions were detected with significant change points in 1969 ($p<0.03$), 1992 ($p<0.04$), and 2006 ($p<0.02$; Figure 3b). The mean sediment load in 2006-2017 was only 29% of that in 1956-1968 (Table 2). For the Jialing River, the sediment loads showed an 81% reduction in 2000-2014 compared with that in 1956-1984 (Figure 3c). The sediment loads have declined to $5.4 \pm 4.2 \text{ Mt yr}^{-1}$ in 2015-2017, showing a reduction of 97% with respect to 1956-1984 data (Table 2). Similar stepwise reduction occurred in the Wu River, with a reduction of 86% in 2001-2017 compared with 1967-1983 data (Figure 3d and Table 2). Other than the overall reduction at the time scale of 60 years, the sediment loads exhibited significant positive trends in 1970-1990 for the Yalong River ($p<0.02$) and the Min River ($p<0.03$), and in 1956-1985 for the Wu River ($p<0.02$). These temporal increases in the 1970s and 1980s are ascribed to an increased sediment yield in response to deforestation and land use changes.

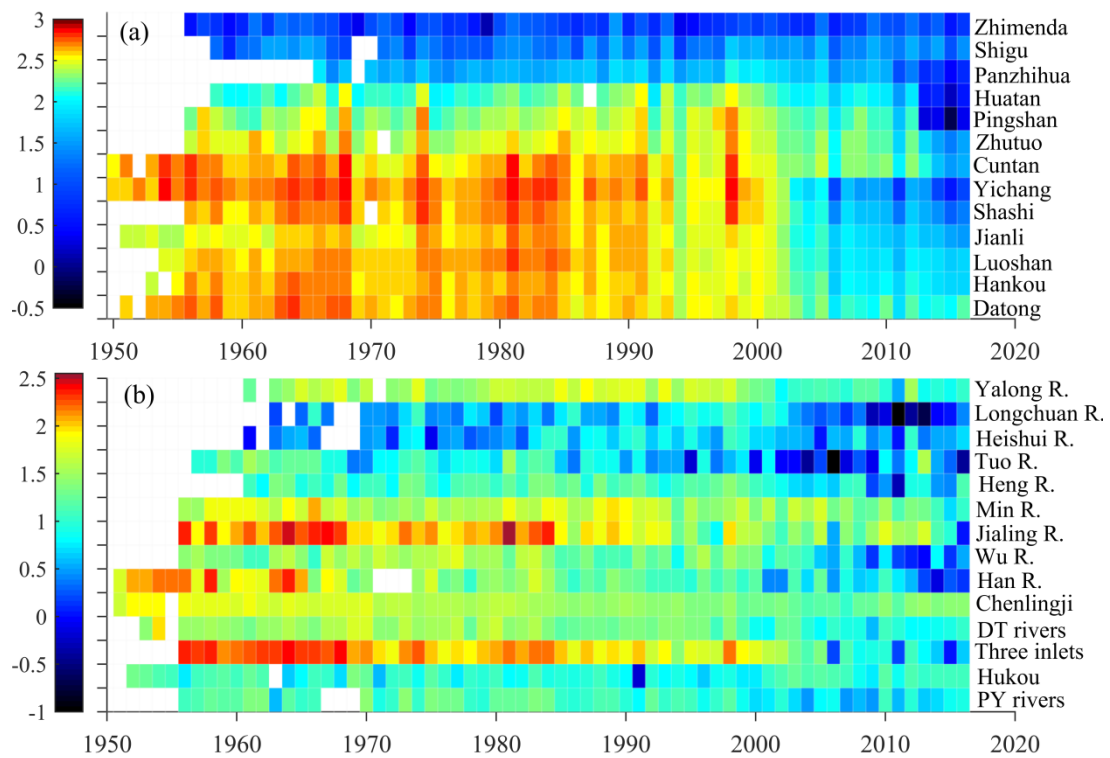


Figure 2. Time series of annual sediment loads (million tons in log10 scale) (a) along the mainstem and (b) at the mouths of the tributaries

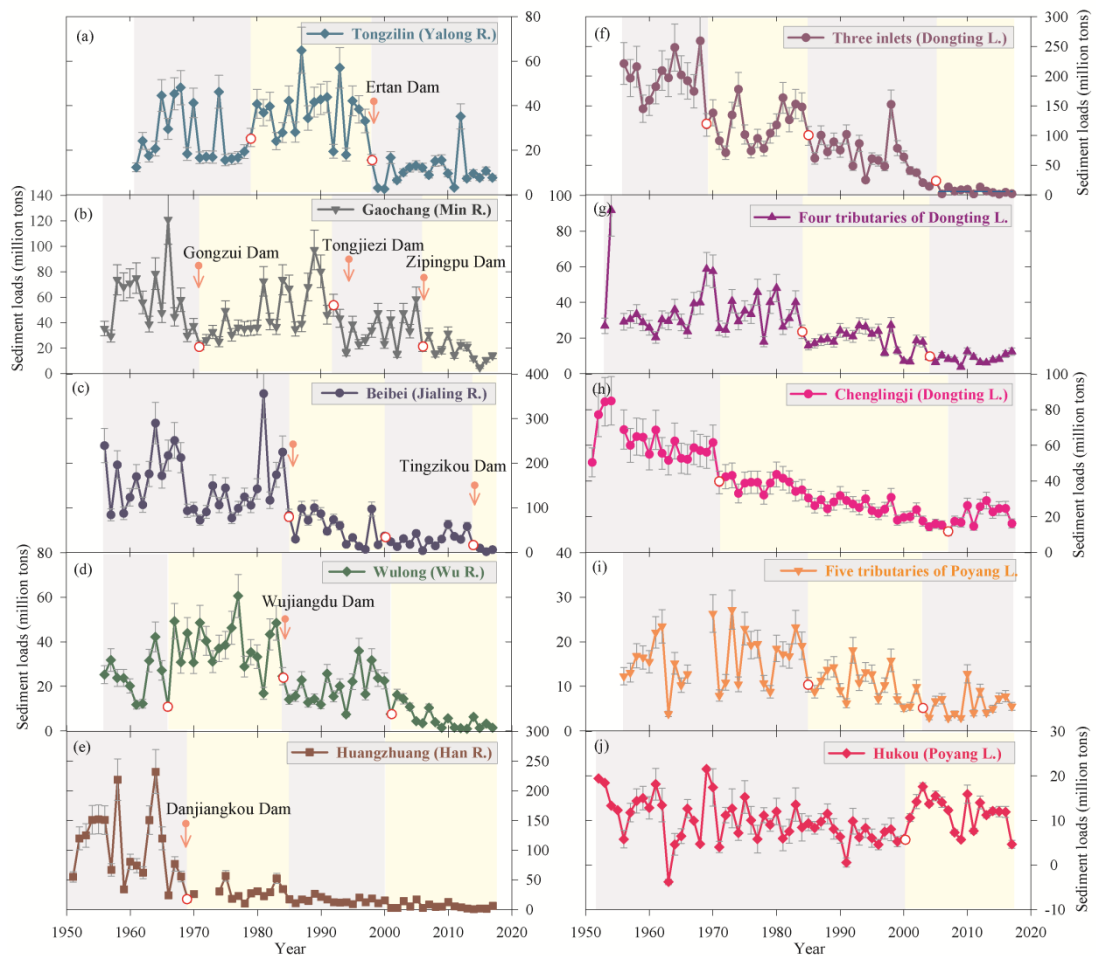


Figure 3. Sediment load changes at the mouths of large tributaries, inlets and lakes in the CRB in 1950-2017: (a) Tongzilin (Yalong River), (b) Gaochang (Min River), (c) Beibei (Jialing River), (d) Wulong (Wu River), (e) Huangzhuang (Han River), (f) Three inlets (Dongting Lake system), (g) four combined tributaries flowing into the Dongting Lake, (h) Chenglingji (Dongting Lake system), (h) five combined tributaries flowing into the Poyang Lake and (i) Hukou (Poyang Lake system). The red empty circles indicate the change points, and the arrows indicate the year in which the hydropower dams began operation. Shading is used to indicate different time intervals.

Table 2. Sediment loads (SL) in the tributaries in different intervals; the values are given as means and one standard deviation. * The combined sediment loads of the four small tributaries are summarized by the flux at XiaoHGY, Ningnan, Hengjiang, and Fushun.

| Tributary | Gauge | SL (Mt yr ⁻¹) | Interval | SL (Mt yr ⁻¹) | Interval | SL (Mt yr ⁻¹) | Interval | SL (Mt yr ⁻¹) | Interval |
|--------------------------|------------------|------------------------------|-----------|------------------------------|-----------|------------------------------|-----------|------------------------------|-----------|
| Yalong River | Tongzilin | 25.9±12.5 | 1961-1979 | 37.5±11.8 | 1980-1997 | 11.2±7.1 | 1998-2017 | - | - |
| Min River | Gaochang | 61.3±24.2 | 1956-1968 | 45.8±20.3 | 1969-1991 | 36.0±13.7 | 1992-2005 | 18.0±7.9 | 2006-2017 |
| Jialing River | Beibei | 155.3±70.3 | 1956-1984 | 57.2±32.6 | 1985-1999 | 29.1±16.3 | 2000-2014 | 5.4±4.2 | 2015-2017 |
| Wu River | Wulong | 23.7±9.7 | 1956-1966 | 39.0±10.3 | 1967-1983 | 19.9±7.4 | 1984-2000 | 5.5±4.8 | 2001-2017 |
| Four small tributaries * | | 33.4±11.2 | 1963-2001 | 16.0±10.7 | 2002-2016 | - | - | - | - |
| Han River | Huangzhuang | 108.2±59.6 | 1951-1968 | 25.8±12.6 | 1969-1989 | 14.5±4.0 | 1990-2000 | 5.6±4.8 | 2001-2017 |
| Dongting Lake | Four tributaries | 35.2±14.3 | 1953-1984 | 17.8±6.7 | 1985-2005 | 8.6±2.6 | 2006-2017 | - | - |
| | Three inlets | 200.2±32.1 | 1956-1968 | 118.2±32.6 | 1969-1984 | 64.7±33.6 | 1985-2005 | 5.9±4.3 | 2006-2017 |
| | Chenglingji | 62.5±10.4 | 1951-1970 | 29.1±9.1 | 1971-2007 | 21.7±5.1 | 2008-2017 | - | - |
| Poyang Lake | Five tributaries | 16.2±6.0 | 1956-1984 | 10.9±3.6 | 1985-2000 | 6.0±2.7 | 2001-2017 | - | - |
| | Hukou | 14.1±3.8 | 1952-1962 | 9.4±4.8 | 1963-1989 | 6.2±2.4 | 1990-2000 | 11.8±3.6 | 2001-2017 |

The combined sediment loads of the aforementioned four large tributaries, the combined drainage area of which accounts for 66% of that between Panzhihua and Yichang, displayed a gradual decreasing trend from 1985 onward (Figure 4a). Specifically, the average, $264.2 \pm 86.7 \text{ Mt yr}^{-1}$ in 1961-1985, decreased to $64.6 \pm 30.3 \text{ Mt yr}^{-1}$ in 2002-2017. The recent years were characterized by an emerging low sediment load that averaged $30.0 \pm 8.5 \text{ Mt yr}^{-1}$ in 2014-2017, implying a reduction of 89% compared with that in 1961-1985.

The small tributaries in the upper basin deliver measurable sediment loads to the mainstream. The summarized sediment loads of the Longchuang, Heng, Heishui, and Tuo rivers, at $33.4 \pm 11.2 \text{ Mt yr}^{-1}$ in 1963-2001, decreased to $16.0 \pm 10.7 \text{ Mt yr}^{-1}$ in 2002-2016 (Figure 4b and Table 2). These small tributaries presently stand out as important sediment suppliers to the mainstream.

In the middle-lower basin, the sediment loads of the Han River exhibited two significant change points in the late 1960s ($p < 0.04$) and the late 1980s ($p < 0.02$) (Figure 2e). The mean sediment loads were 95% smaller in 2001-2017 compared with 1951-1968 data (Table 2). The sediment loads of the four tributaries emptying into the Dongting Lake exhibited no significant changes between 1950 and the mid-1980s, but declined abruptly in the mid-1980s, followed by a slow decrease until 2017 (Figure 3g). The loads were approximately 76% smaller in 2006-2017 compared with 1953-1984 data (Table 2). At the three inlets, the sediment loads have reduced progressively since 1950 (Figure 3f) and were 97% smaller in 2006-2017 compared with 1956-1968 data. This reduction is the consequence of reduced water diversion at the three inlets as a result of main river erosion and lowered river stages as well as aggradation of the inlets (Chen et al., 2001; Yin et al., 2007). Accordingly, the sediment loads at the lake mouth at Chenglingji were reduced by 65% in 2008-2017 compared with 1951-1970 data (Table 2).

Similarly, the total sediment loads of the five tributaries discharging into the Poyang Lake exhibited no directional changes between the mid-1950s and the

mid-1980s, although a statistically significant negative trend ($p < 0.001$) was noted between the late 1970s and the late 2000s (Figure 3i). A reduction of 63% occurred in 2001-2017 compared with 1956-1984 data. At the lake mouth at Hukou, the sediment loads decreased by 56% in 1990-2000 compared with 1952-1962 data (Table 2). More sediments have been flushed out of the Poyang Lake since 2001 compared with that in the previous two decades owing to sand mining activities (Figure 3j). When considering the Dongting Lake sediment loads, which is that at Chenglingji minus the loads at the three inlets, as well as the loads in the Han River and Poyang Lake, a net sediment loss of $30.6 \pm 28.5 \text{ Mt yr}^{-1}$ from the mainstream was recorded in 1956-2002, which changed, however, to a sediment surplus of $28.7 \pm 7.6 \text{ Mt yr}^{-1}$ in 2003-2017 (Figure 4e). Overall, the sediment loads of most of the tributaries have decreased to low and insignificant quantities during recent years, particularly the Jialing, Wu, and Han rivers (Figures 3 and 4).

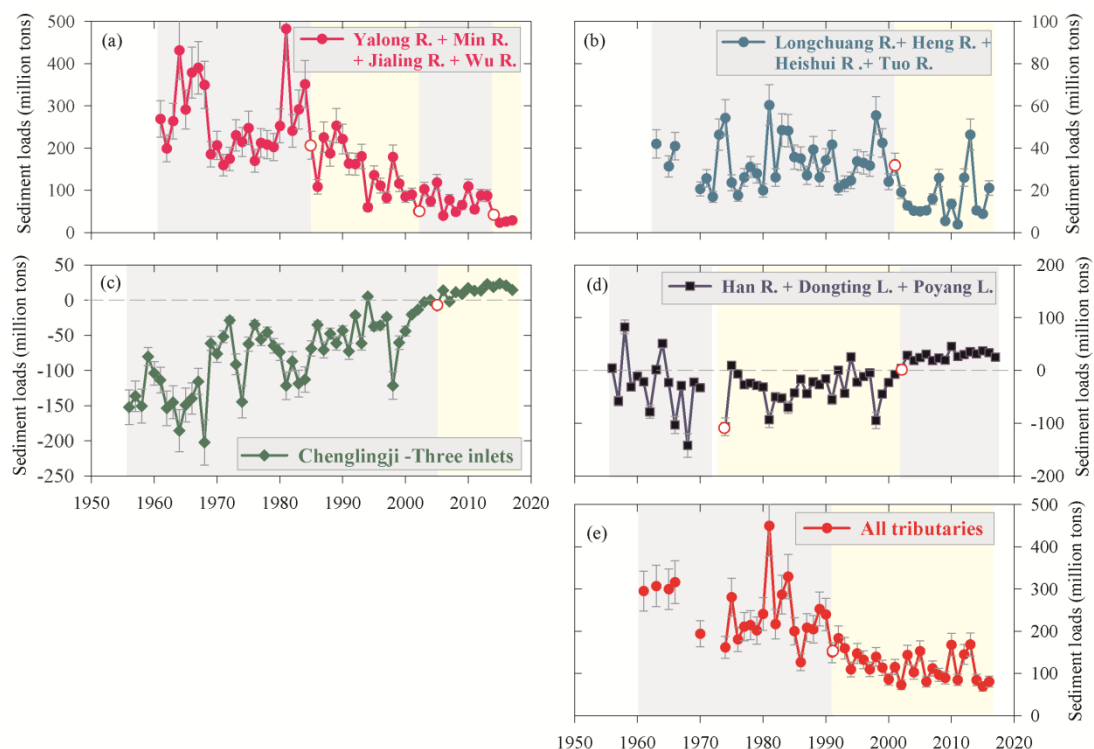


Figure 4. Total sediment loads of the tributaries, inlets and lakes during 1950-2017: (a) the four large tributaries in the upper basin including the Yalong, Min, Jialing, and Wu rivers, (b) the four small tributaries in the upper basin including the Longchuang, Heng,

Heishui, and Tuo rivers, (c) the Chenglingji minus the three inlets, (d) the three large tributaries in the middle-lower basin including the Han River, and Dongting and Poyang lake systems, and (e) all of the large and small tributaries. The red circles indicate the change points. Shading is used to indicate different time intervals.

3.2 Sediment loads along the mainstem

The sediment load changes in the mainstem are characterized by high spatial and temporal variability. In the main river upstream of Pingshan, the sediment loads showed a positive trend prior to 2000 ($p < 0.05$), followed by a sharp decline thereafter (Figures 2 and 5 and Table 3). In the headwater zone, the sediment loads at Zhimenda slightly increased from $8.8 \pm 5.6 \text{ Mt yr}^{-1}$ in 1956-1980 to $10.1 \pm 5.9 \text{ Mt yr}^{-1}$ in 1981-2017 (Table 3). Approximately 800 km downstream of that area, the sediment loads at Shigu showed a stepwise increase with two significant change points detected in 1980 ($p < 0.01$) and 1998 ($p < 0.005$), respectively (Figure 5a). The sediment loads peaked in 1998 in the reach between Shigu and Pingshan, followed by a rapid reduction thereafter. The increase in the reach between Shigu and Pingshan in the 1970s-1990s is in line with larger sediment loads in the Yalong and Min rivers in the same period (see section 3.1). Subsequently, the mean sediment loads were reduced to $8.1 \pm 6.7 \text{ Mt yr}^{-1}$ at Panzhihua in 2011-2017, which was even smaller than that at Shigu, at $27.4 \pm 9.9 \text{ Mt yr}^{-1}$ (Figure 5a and Table 3). The loads further declined to merely $1.7 \pm 0.7 \text{ Mt yr}^{-1}$ at Pingshan in 2013-2017 due to the operation of the Xiangjiaba Dam, which is $< 1\%$ of the mean value recorded prior to 2000 (Table 3).

The sediment loads increased in the downstream direction between Pingshan and Cuntan owing to the sediment supply from the tributaries (Figure 5b). Temporally, the sediment loads at Cuntan were reduced by 60% in 2003-2013 compared with 1950-1978 data (Table 3). The temporal changes at Yichang were in line with those at Cuntan prior to 2002, whereas the sharp reduction that occurred around 2003 is attributed to the TGD operation (Figure

5c). A statistically significant decline was detected in the decades since the mid-1980s at both Cuntan and Yichang. The sediment loads were reduced by 93% in 2003-2017 compared with those recorded in 1950-1985 at Yichang. The reduction to $6.2 \pm 3.2 \text{ Mt yr}^{-1}$ in 2014-2017 is <1% of the mean value recorded in 1950-1985 (Table 3).

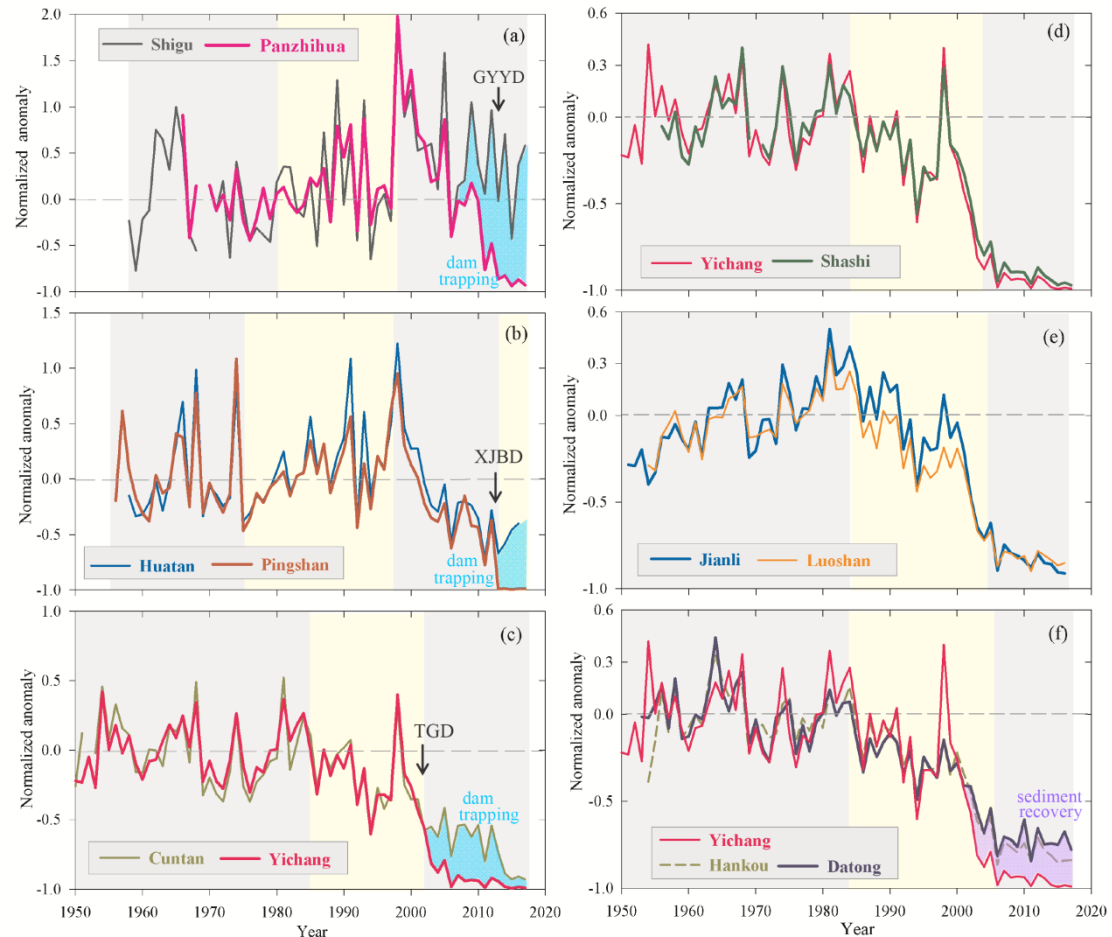


Figure 5. Normalized anomalies of annual sediment loads at (a) Shigu and Panzhihua, (b) Huatan and Pingshan, (c) Cuntan and Yichang, (d) Yichang and Shashi, (e) Jianli and Luoshan, and (f) Hankou and Datong along the Changjiang mainstem. The reference period is 1950-1985. GYYD in (a) indicates Guanyinyan Dam. XJBD in (b) indicates Xiangjiaba Dam. The differences between the two lines in each plot indicate the impacts of dam trapping or sediment recovery. Shading is used to indicate different time intervals. The light blue shading in panels (a), (b), and (c) indicates the effects of dam trapping, whereas the magenta shading in panel (f) indicates sediment recovery between Yichang and Datong.

463

Table 3. Sediment loads (SL) at gauges along the main river; values are given as means and one standard deviation.

| Gauge | SL (Mt yr ⁻¹) | Interval | SL (Mt yr ⁻¹) | Interval | SL (Mt yr ⁻¹) | Interval | SL (Mt yr ⁻¹) | Interval |
|-----------|------------------------------|-----------|------------------------------|-----------|------------------------------|-----------|------------------------------|-----------|
| Zhimenda | 8.8±5.3 | 1956-1980 | 10.1±5.9 | 1981-2017 | - | - | - | - |
| Shigu | 20.3±10.3 | 1958-1980 | 23.7±11.4 | 1981-1997 | 32.4±12.8 | 1998-2017 | - | - |
| Panzhihua | 42.4±14.9 | 1966-1980 | 56.0±23.1 | 1981-2010 | 8.1±6.7 | 2011-2017 | - | - |
| Huatan | 157.2±62.1 | 1958-1980 | 205.5±63.8 | 1981-2002 | 111.2±31.8 | 2003-2012 | 80.5±18.6 | 2013-2017 |
| Pingshan | 245.5±100.6 | 1956-1975 | 261.0±78.6 | 1976-1998 | 173.8±68.5 | 1999-2012 | 1.7±0.7 | 2013-2017 |
| Zhutuo | 316.4±90.1 | 1956-1975 | 309.3±72.5 | 1976-1998 | 197.2±70.4 | 1999-2012 | 37.9±18.2 | 2013-2017 |
| Cuntan | 453.4±111.8 | 1950-1978 | 403.2±126.5 | 1979-2002 | 180.7±53.9 | 2003-2013 | 40.5±8.7 | 2014-2017 |
| Yichang | 523.0±103.7 | 1950-1985 | 411.0±129.1 | 1986-2002 | 46.6±32.9 | 2003-2013 | 6.2±3.2 | 2014-2017 |
| Jianli | 367.3±80.0 | 1951-1985 | 341.2±74.7 | 1986-2002 | 73.5±33.8 | 2003-2017 | - | - |
| Luoshan | 442.5±70.4 | 1954-1985 | 346.6±67.6 | 1986-2002 | 86.4±31.6 | 2003-2017 | - | - |
| Hankou | 431.3±65.5 | 1953-1985 | 330.4±57.8 | 1986-2002 | 101.0±36.5 | 2003-2017 | - | - |
| Datong | 470.4±71.4 | 1951-1985 | 317.7±74.3 | 1986-2005 | 124.2±31.7 | 2006-2017 | - | - |

464

The sediment loads have also declined along the middle-lower river following the changes at Yichang, except for a regional increase in the reach between Shashi and Luoshan (Figures 5d to 5f). The increase in sediment loads at Jianli and Luoshan between 1950 and 1985 was caused by a decrease in sediment lost to the Dongting Lake via the three inlets (Figure 3f). Specifically, the average sediment loads at Jianli were 155.7 ± 96.6 and 69.8 ± 67.2 Mt yr⁻¹ smaller than those at Yichang in 1951-1985 and 1986-2002, respectively (Table 3). Since 1985, the negative trend in sediment loads has persisted throughout the river downstream of Yichang, although the magnitude and rate of the decrease became smaller in the downstream direction (Table 3).

Further downstream, the decline in sediment loads has been statistically significant at both Hankou ($p < 0.02$) and Datong ($p < 0.01$) since 1960 (Figure 5f). The sediment loads decreased by 75% at Hankou in 2003-2017 compared with 1953-1985 data (Table 3). A temporally stable sediment flux of 124.2 ± 31.7 Mt yr⁻¹ was approached at Datong in 2006-2017, which is 74% smaller than the mean value recorded in 1951-1985. Overall, the sediment loads along the mainstem have decreased progressively over a period of 60 years (Figure 2 and 5).

3.3 In-reach sediment budget

The in-reach sediment budget analysis reveals apparently different sediment delivery and storage patterns between the upper and middle-lower mainstems (Figure 6). The sediment output to input ratio was largely >1 in the upper mainstem prior to 2000, suggesting an in-reach net sediment supply (Figures 6a-f). This net supply can be ascribed to sediment sources from ungauged small tributaries and debris flows (see section 4.1). In contrast, the meandering river between Yichang and Luoshan had an output-to-input ratio close to 1 prior to 2000, which suggests that it was close to an equilibrium state and acted as a sediment conduit (Figure 6g). The reach between Luoshan and Datong had an output-to-input ratio averaging <1 prior to 2000, which suggests

in-reach sediment deposition and channel aggradation.

Significant changes in the in-reach sediment budget have occurred since the early 2000s as the human influence has increased. The Shigu-Panzhihua reach has changed from being a net source of sediment to a storage sink since 2011 (Figure 6b) owing to the sediment trapping effects of the newly built hydropower dams. Similar changes have occurred in the Huatan-Pingshan reach (Figure 6d) and in the Cuntan-Yichang reach (Figure 6f) owing to dams such as the Xiangjiaba, Xiluodu, and TGD. A net in-reach sediment supply remained in the reach between Pingshan and Cuntan, but its magnitude has decreased (Figure 6e). In contrast, the river downstream of Yichang changed from slight aggradation prior to 2000 to net sediment supply and degradation post-2000 (Figures 6g and 6h).

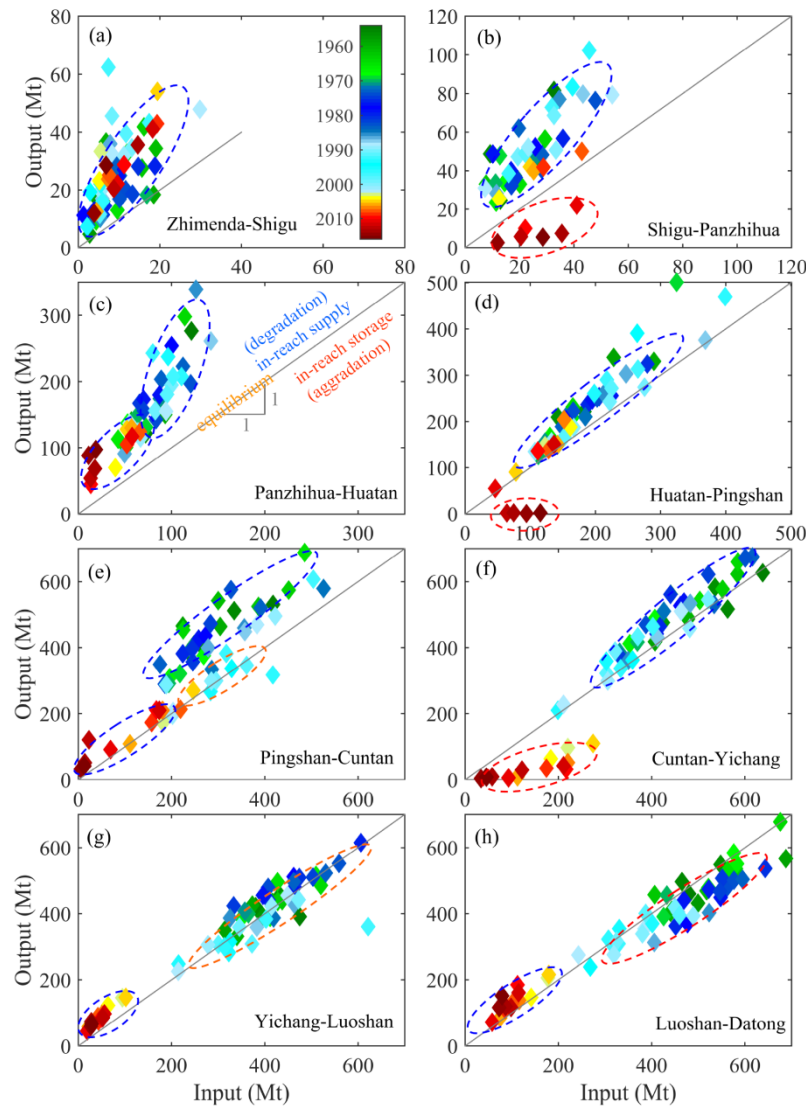


Figure 6. In-reach sediment input and output correlations along the mainstem in the reaches (a) the reach of Zhimenda to Shigu, (b) Shigu to Panzhihua, (c) Panzhihua to Huatan, (d) Huatan to Pingshan, (e) Pingshan to Cuntan, (f) Cuntan to Yichang, (g) Yichang to Luoshan, and (h) Luoshan to Datong. An output to input ratio equal to 1 indicates equilibrium, whereas ratios <1 and >1 indicate in-reach sediment recruitment (degradation) and in-reach sediment storage (aggradation), respectively.

3.4 Basin-wide change behavior

The annual streamflow increases gradually in the downriver direction, except for a regional decline noted between Yichang and Jianli (Figures 7a and 7c). The downstream increase is ascribed to accumulated inflow from

tributaries, whereas water lost into the Dongting Lake caused the regional reduction. A major portion of the streamflow is derived from the regions between Pingshan and Yichang (i.e., the Sichuan Basin), and between Jianli and Datong (i.e., the Two-Lake Basin). This corresponds to the two rain storm zones under the influences of the East Asian monsoon: the Min-Jialing rivers and the Dongting-Poyang lake systems (Gemmer et al., 2008). Over time, the streamflow throughout the river has decreased slightly in the recent decades, but the trend is statistically insignificant ($p < 0.1$).

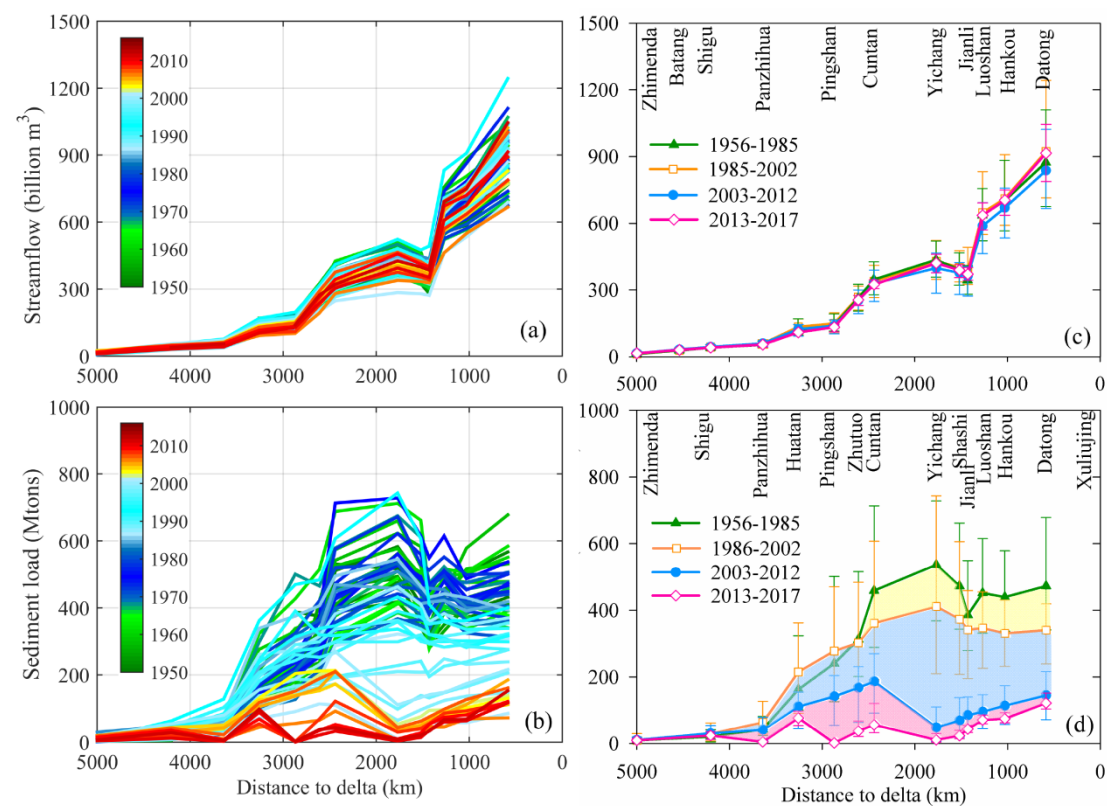


Figure 7. Along-river changes in annual (a) streamflow and (b) sediment loads between Zhimenda and Datong recorded in 1950-2017, (c) multi-year averaged streamflow, and (d) sediment loads in four intervals. The distance to the delta was measured from Xuliujing, the present-day delta apex shown in Figure 1. It was notable that the data length at Zhimenda, Batang, Shigu, and Panzhihua is slightly shorter than that at other gauges, as shown in Table 1, which may induce bias on the mean value in the period of 1956-1985.

To better indicate the temporal sediment load changes, we categorized the time series of data into four intervals: 1956-1985, 1986-2002, 2003-2012, and 2013-2017 (Figures 7c and 7d). These periods were chosen because a significant change point of streamflow was detected in 1954 according to the data recorded between 1878 and 2015 at Yichang and between 1865 and 2015 at Hankou (Guo et al., 2018). Similar change points may have occurred for sediment loads, although they were not detected directly from sediment load data due to the shorter record length. In addition, a significant change point occurred in the sediment loads in 1985 at the majority of gauges along the mainstem, as discussed in section 3.2. Moreover, the sediment loads downstream of Yichang have reduced sharply since the TGD began operation in 2003. Further, the sediment load reduction in the upper basin has been reinforced since 2013, when additional hydropower dams were constructed (Figure 5).

Taking the 1956-1985 as the reference period in which human activities did not induce significant sediment load changes in the mainstem, the yearly sediment loads were shown to increase from the headwater to Yichang in the downstream direction, followed by a decrease until Jianli. From Jianli, the sediment outflow from the Dongting Lake led to a moderate recovery at Luoshan but was followed by a slight decrease in the reach to Hankou. Farther downstream, the sediment sources from the Han River and Poyang Lake resulted in a larger sediment flux at Datong than that at Hankou (Figure 7d). It is notable that the sediment flux at Datong was smaller than that at Yichang in 1956-1985; the former controls a significantly larger drainage area than the latter. This result is attributed to along-channel sedimentation and sediment lost to the Dongting Lake.

The along-river sediment load variations changed profoundly in the subsequent periods (Figure 8). Sediment loads in the headwater zone upstream of Shigu changed little; they were slightly larger in 1986-2002 than in 1956-1985 in the reach between Shigu and Zhutuo. Downstream of Zhutuo, a

reduction occurred over the entire reach to Datong. Since 2003, the sediment loads downstream of Shigu began to decrease significantly (Figure 7d). The reduction was most significant between Cuntan and Yichang in 2003-2012 and between Panzhihua and Cuntan in 2013-2017. The nearly linear sediment load increase in the downstream direction starting from Yichang in both 2003-2012 and 2013-2017 suggests sediment recruitment that led to gradual sediment load recovery. The sediment load reduction trend migrated upstream over time (Figure 7d). Overall, the sediment flux in the CRB has decreased substantially throughout the river downstream of Shigu over the last three decades (Figure 8). The low sediment loads at Panzhihua, Pingshan, and Yichang in recent years indicate the controlling effects of the dams.

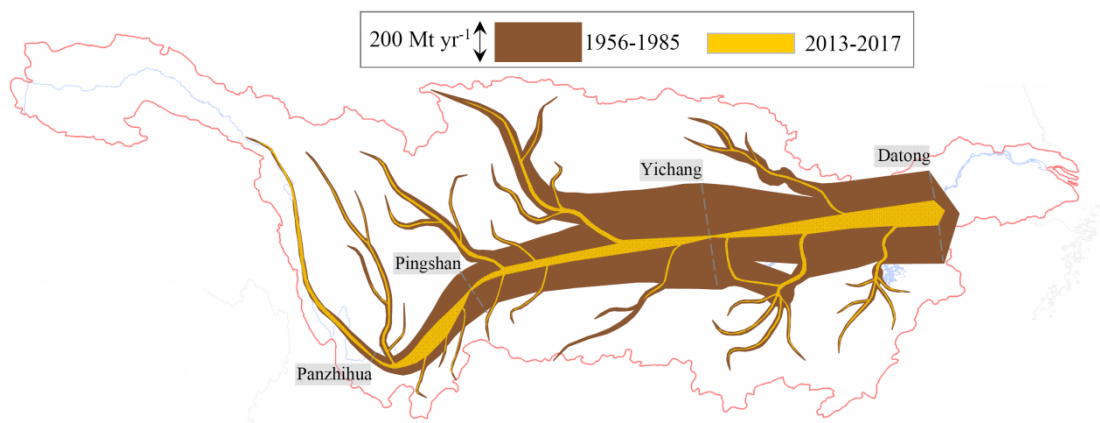


Figure 8. A sketch of sediment load distribution in 1956-1985 and 2013-2017 throughout the CRB

The Changjiang River is becoming overwhelmingly limited in sediment supply as a result of a substantial decline in sediment load. The main river has become increasingly less sediment-laden in the downstream direction (Figure 9a). The recent years since 2013 are characterized by a particularly low sediment load regime throughout the river downstream of Panzhihua. The tributaries in the northwestern regions of the CRB (i.e., the Yalong, Min, Jialing, and Han rivers) are relatively more sediment-laden than the tributaries in the southeastern regions (i.e., the Wu River and the Dongting and Poyang lake

systems) (Figure 9b). The small tributaries along the Jinsha River also carry proportionately higher sediment loads than the large tributaries, i.e., large sediment loads are carried by small streamflows. In contrast, the outflows of the Dongting and Poyang lakes have proportionately smaller sediment loads because of the sedimentation inside the lakes.

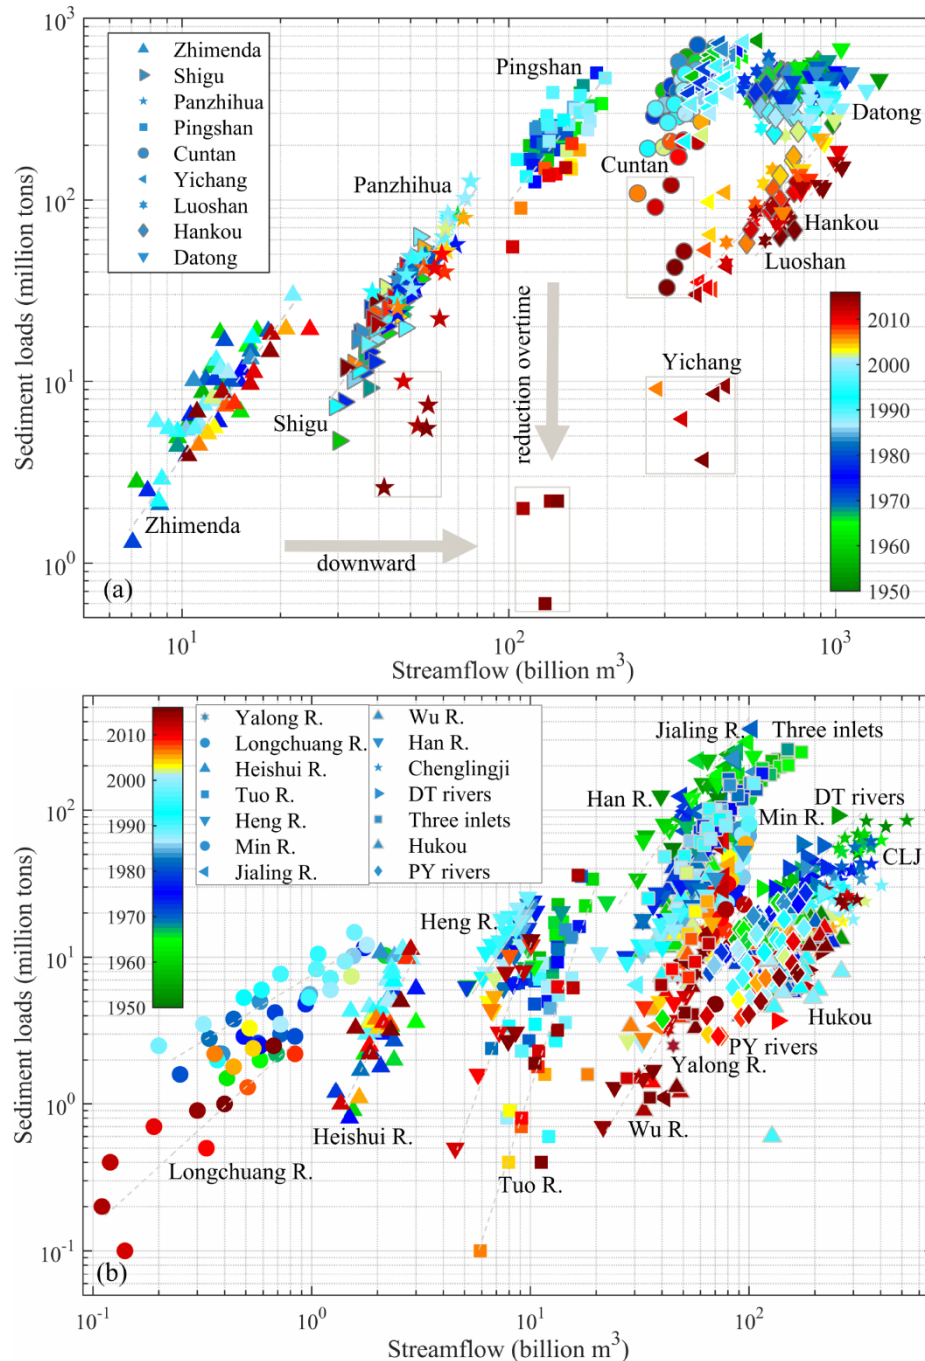


Figure 9. Rating curves based on the annual streamflow and sediment loads (a) along the Changjiang mainstem between Zhimenda and Datong, and (b) those of the tributaries and lake systems. The boxes in (a) indicate the data points since 2013. The

labels 'over-time' and 'downstream' indicate the changes overtime and in the downstream direction. The dashed lines indicate the derived linear relationship between streamflow and suspended loads at double-log scales. CLJ, DT, and PY in panel (b) indicate Chenglingji, Dongting and Poyang, respectively.

4. Discussion

4.1 Causes of sediment load changes

Multiple factors affect the sediment loads in river channels, including climate change, land use, dams, river channel morphological changes and human-induced sand mining and dredging (Table S1). It is generally agreed that climate change is of secondary importance in causing sediment load changes in the CRB at the decadal time scales (Yang et al., 2006, 2015; Dai and Lu, 2014). Changes in land use due to deforestation explain the slight increase in sediment loads prior to the 1980s in the upper basin, whereas reforestation and the hydropower dams in the tributaries initiated the reduction since the mid-1980s (Yang et al., 2006; Wei et al., 2011). Large hydropower dams in the mainstream have become a major factor in accelerating the decline in sediment load since the early 2000s (Yang et al., 2006, 2015, 2018; Dai and Lu, 2014). Nonetheless, isolating and quantifying the impacts of different driving forces remains a challenge because of the buffering and masking effects that cause damping and even removal of signals of increasing or decreasing flux in the downstream direction. This complicates the link between the upstream and downstream responses to human impact (Higgitt and Lu, 1999; Walling, 2006; Wang et al., 2007). Here, we present a more holistic analysis of the sediment trapping effects of the large hydropower dams and the factors causing sediment replenishment and sediment load recovery, while an additional review and discussion of the impacts of hydro-meteorological changes, land use changes, and sand mining are included in the Supporting Information.

Dam impacts

Numerous hydropower dams are operating within the CRB, the majority of which are in the upper basin. The total number of dams in 2016 was more than 52,000 and their total storage capacity is ~360 billion m³, with a flood control capacity of >77 billion m³; this ranks the Changjiang River as one of the most heavily dammed rivers in the world (Yang et al., 2011, 2018). In the 1980s, the total sedimentation rate in the man-made reservoirs was 139.9 million m³ per year in the upper CJR basin (Guo, 2015; Wei et al., 2011). Gao et al. (2015) documented that the sediment trapping rate of the man-made reservoirs crossing the CRB increased from <30 Mt yr⁻¹ in the 1950s to ~124 Mt yr⁻¹ by 1989 and ~208 Mt yr⁻¹ by 2002. Yang and Lu (2014) reported a total reservoir sedimentation rate of 691.0 ± 93.7 Mt yr⁻¹ across the entire CRB, which may be overestimated because it is even larger than the sediment flux in the main river. These evidences indicate substantial sediment trapping with a consequent reduction in downriver sediment loads.

The statistically significant change points in sediment loads of the tributaries were strongly correlated to the years in which the dams were put into operation (Figure 3). Specifically, the Ertan Dam was responsible for the sediment load reduction at the mouth of the Yalong River in 1998 (Figures 3a and S3). The Gongzui Dam (1966-1970-1979) in the Min River had caused ~58% of sediment load reduction at the dam site (Gu and Ian, 1989), whereas the Tongjiezi Dam (1985-1993-1995) and the Zipingpu Dam (2001-2004-2006) further exacerbated the reduction at the river confluence (Figure S3). The combined effects of the Bikou Dam (1969-1976-1997), Shengzhong Dam (1977-1984-1998), Baozhusi Dam (1984-1996-1998), Dongxiguang Dam (1992-1995-1996), and Tingzikou Dam (2009-2010-2014) resulted in profound sediment load reduction in the mid-1980s and in the early 2010s in the Jialing River. The Danjiangkou Dam induced a sharp sediment load reduction in the Han River in the late 1960s (Figure 3e).

The hydropower dams constructed in the mainstem play an even more

critical role in disrupting sediment delivery. The first dam constructed in the mainstem was the Gezhouba Dam (1971-1981-1988), at a location ~4 km upstream of Yichang (Figure 10 and S3). The Gezhouba Dam stored water for the first time in 1981 and its reservoir sedimentation reached a maximum in 1985. The sedimentation rate is ~6.4 Mt yr⁻¹ in 1981-2000 (CWRM, 2002), which is relatively small compared to a sediment flux of 478.8 Mt yr⁻¹ at Yichang in the same period. The TGD (1994-2003-2009) was the second to be built in the mainstem, but is now the biggest, with a dam length of 2,335 m and a storage capacity of 39.3 km³ (Figure S4). Thus far, the TGD has trapped a total of 1,699 million tons of sediment between 2003 and 2017 (i.e., 113.3 ± 58.4 Mt yr⁻¹). On average, ~60% and ~83% of incoming sediments were deposited in the TGD reservoir in 2003-2005 (pilot operation period) and 2006-2017, respectively (Table 4). This sediment trapping efficiency is in line with the estimate based on the water residence time, as defined by the storage capacity to streamflow ratio (Brune, 1953; Table S2).

Table 4. Annual incoming and outgoing sediment fluxes of the TGD and the sediment loads at Datong (unit: Mt yr⁻¹) in four intervals between 1956 and 2017; values are given as means and one standard deviation). * indicates incoming sediment loads based on data at Cuntan plus Wulong, and ** indicates the sediment load at Yichang, representing that out of the TGD. # Negative values in the pre-TGD period indicate extra sediment sources in the reaches between Cuntan and Yichang.

| Interval | TGD In* | TGD Out** | TGD sedimentation | Trapping efficiency | Datong |
|-----------|-------------|-------------|-------------------|---------------------|------------|
| 1956-1985 | 490.6±105.9 | 536.3±97.1 | -45.7±39.2 # | - | 472.3±75.0 |
| 1986-2002 | 380.0±112.3 | 411.0±129.1 | -31.0±30.8 # | - | 340.2±52.6 |
| 2003-2005 | 226.2±45.6 | 90.5±23.8 | 135.7±24.9 | 60% | 189.7±37.3 |
| 2006-2013 | 170.9±53.7 | 30.1±15.7 | 140.8±41.4 | 82% | 124.8±37.4 |
| 2014-2017 | 43.6±11.0 | 6.2±3.2 | 37.3±8.2 | 86% | 123.0±20.5 |

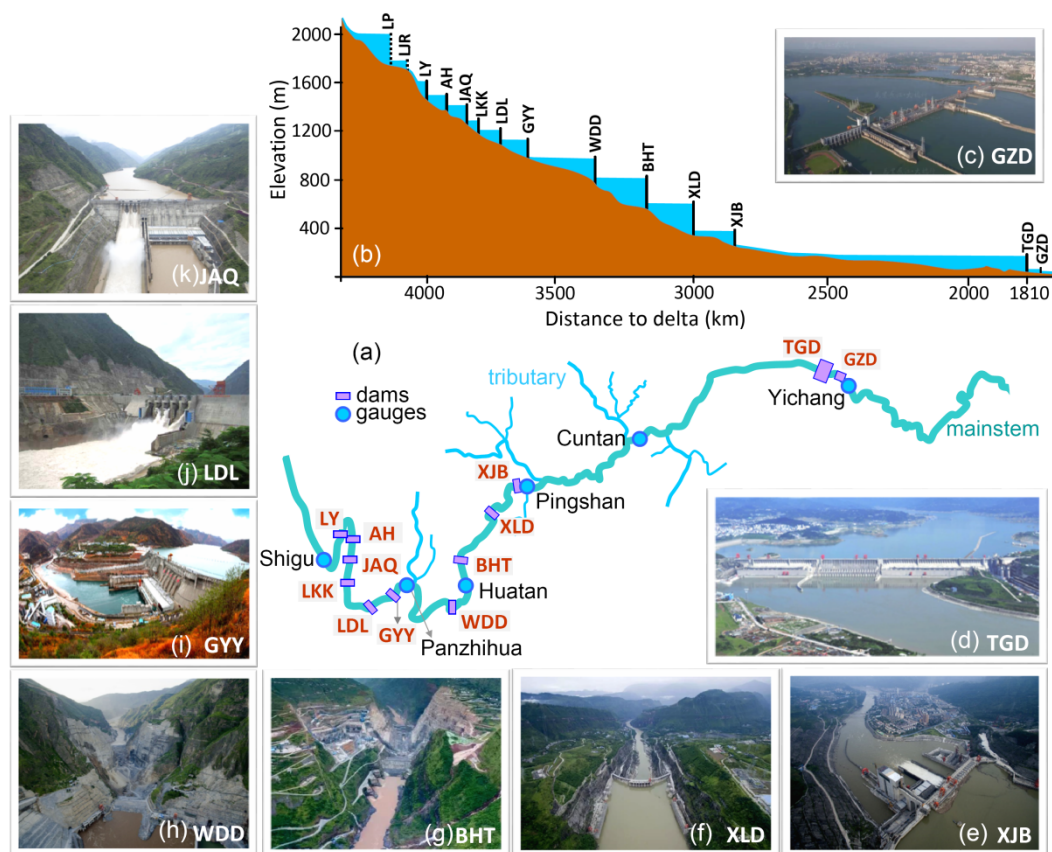


Figure 10. (a) Location and (b) elevation of the dams in the mainstem of the upper Changjiang River, including (c) Gezhouba Dam (GZD), (d) Three Gorges Dam (TGD), (e) Xiangjiaba Dam (XJB), (f) Xiluodu Dam (XLD), (g) Baihetan Dam (BHT), (h) Wudongde Dam (WDD), (i) Guanyinyan Dam (GY), (j) Ludila Dam (LDL), Longkaikou Dam (LKK), (k) Jin'anqiao Dam (JAQ), Ahai Dam (AH), and Liyuan Dam (LY).

Since the completion of the TGD, additional dams have been constructed and more are planned along the upper main river, including the Xiangjiaba, Xiluodu, Baihetan, Wudongde, Guanyinyan, Ludila, Longkaikou, Jin'anqiao, Ahai, and Liyuan dams (Figures 10 and S3; Table S2). The total storage capacity of the first four of these more recent large dams is $\sim 43.1 \text{ km}^3$, which is even larger than the TGD. The Ludila and Guanyinyan dams have reduced the sediment flux at Panzhihua to a quantity smaller than that at Shigu, the upstream station, since 2011. The Xiangjiaba Dam reduced the sediment flux at Pingshan to $1.7 \pm 0.7 \text{ Mt yr}^{-1}$ in 2013-2017. These new dams have reduced

the sediment flux to the TGD and have slowed its reservoir sedimentation (Table 4). This change will prolong the time scale of TGD's disruption effects on sediment delivery for 300-400 years compared with the previously expected 80-100 years on the basis of a representative incoming sediment flux in the 1960s (CYJV, 1988; section S1). Presently, the impact of the TGD in addition to the collective effects of all of these large dams has significantly disrupted the sediment delivery throughout the main river; their cumulative sediment trapping effects will remain significant for future centuries to come.

Sediment recruitment

There are factors that lead to an increase in sediment load, including landslides and channel degradation (Figure 11). The sediment supplied by landslides and debris flows is becoming an important in-channel source particularly in the upper basin (Liu et al., 2010). Griffiths and Topping (2017) identified the importance of small tributaries in closing sediment budgets, which may also be the case in the upper CRB. Numerous alluvial fans are present along the Jinsha River and they provide ungauged sediment to the mainstem (Figures S8). For example, two large landslide events that occurred along the mainstem of the Jinsha River in October 2018 deposited a large quantity of sediment, ~2,500 million m³, in the mainstem and blocked the main channel for weeks (Figures S8). The M_w 7.9 Wenchuan earthquake in the Min-Tuo River basins in 2008 resulted in a huge amount of sediment transported to the river channels that may take more than three decades to disperse (Wang et al., 2015a). The unusually high sediment loads in the Yalong River in 2012 and in the Tuo River in 2013, at 35.2 Mt and 36.0 Mt, respectively, can be attributed to such events (Figures 3a and 4b). Such an episodic signal was also detected at Huatan and Zhutuo in the mainstem (Figures 5a and 5b). The contribution of landslides and debris flows in supplying sediments merits further quantification.

The two lake systems have supplied more sediment to the mainstem in the

recent decades (Figure 11). From a sediment budget perspective, the Dongting Lake received more sediment from the mainstream via three inlets than the amount exported at Chenglingji prior to 2006 (Figure 4c). Since 2006, this trend has reversed, thereafter, because of the decline in the sediment loads at the three inlets and the increase in sediment exported from the lake. Specifically, the main river lost $78.2 \pm 51.3 \text{ Mt yr}^{-1}$ to the Dongting Lake in 1956-2005, whereas the main river gained a sediment surplus of $14.4 \pm 7.0 \text{ Mt yr}^{-1}$ in 2006-2017. The Poyang Lake has also exported more sediment to the mainstream since 2001 (Figure 3j). The larger sediment flux at the lake mouths (Figures 3h and 3j) is attributed to ongoing intensive sand mining, which has disturbed the bed and enhanced the potential for sediment suspension (Lai et al., 2014). However, it should be noted that sand mining results in channel degradation and will cause reduction in suspended sediment loads in the longer term (section S1).

1981-2002, at a river length of 980 km, for ~24 million m³ annually (Yang et al., 2017). Channel erosion below the TGD has been enhanced since 2003 (Figure S5; Li et al., 2009; Yang et al., 2014). In total, the channel volume under a mean river stage was enlarged by approximately 1,120 million m³ in the river between Yichang and Luoshan, over a river length of 408 km, between October 2002 and October 2017 (CWRM, 2014, 2018). Channel volume increased by approximately 337 million m³ in the reach between Luoshan and Hankou, over a river length of 251 km, between November 2003 and November 2017 (CWRM, 2018). Considering a bulk density of $1.2 \pm 0.1 \text{ t m}^{-3}$ (Yang et al., 2006; Gao et al., 2015), we estimated that the river between Yichang and Hankou lost $1,748 \pm 146 \text{ Mt}$ of sediment in 2003-2017 (i.e., $125 \pm 10.4 \text{ Mt yr}^{-1}$). It should be noted that the in-reach sediment input and output for the same period were $537 \pm 86 \text{ Mt}$ in total at Yichang and $1,515 \pm 242 \text{ Mt}$ at Hankou, respectively. In addition, an input of approximately $251 \pm 40 \text{ Mt}$ into the reach from the Dongting Lake and Han River was recorded. The amount of sediment from channel erosion was more than double the net flux in and out of the reach. This imbalance may be explained by in-reach sediment loss due to sand mining (section S1) and/or by overestimation of channel erosion volume due to an unknown degree of uncertainty in the bathymetric data. Even allowing for some error, this suggests that channel erosion has become a dominant source of sediment supply in the middle-lower river. These extra sediments led to sediment load recovery downstream of Yichang in the post-TGD periods (Figure 3d). Although the sediment loads at Datong have not been restored to the pre-TGD level, further channel degradation is expected as bed sediment is progressively winnowed, but eventually this degradation will be limited by surface armoring (Lai et al., 2017).

4.2 Changes in sediment connectivity

Sediment connectivity is an important component of river system dynamics and is, as reported by Bracken et al. (2015), 'the connected transfer of

sediment from a source to a sink in a system via sediment detachment and sediment transport, controlled by how the sediment moves between all geomorphic zones in a landscape'. The upper and the middle-lower CRB acted as the sediment source zone and a sediment transport conduit, respectively, prior to 1985 (Figure 12), which is consistent with the conceptual model that is typical of large river systems (Schumm, 1977). However, the sediment connectivity in the CRB was severely interrupted by dams, levees, and sand mining.

The upper and middle-lower basins are disconnected in the sense that only a very small percentage of the sediments produced in the upper basin will reach the middle-lower river and the delta in the post-TGD era (Figure 12). The upper basin was once the major sediment source zone, particularly the region between Pingshan and Yichang (Figure 7d). The sediment sources from the Jinsha and Jialing rivers accounted for ~43% and ~30% of the sediment loads at Yichang, respectively. The total sediment production from surface erosion is >2,000 Mt yr⁻¹ within the CRB (Guo, 2015), whereas the mean sediment loads at Yichang were ~523 Mt yr⁻¹ in 1956-1985. This indicates that only approximately one-fourth of the sediments produced from surface soil erosion ends in river channels as suspended sediment loads, i.e., a sediment delivery ratio of ~24% (Wang et al., 2007). In other words, a major portion of sediments from surface soil erosion remain in gullies, canyons, and other terrain (Guo, 2015; Wang et al., 2007). The sediment transport was basically a supply-limited condition in the upper mainstem, given the ample transport capacity in strong and turbulent river flows. Since then, the large hydropower dams and numerous retention dams which are small barrier dams built in river valleys to improve sediment retention, interrupt sediment runoff and in-channel sediment delivery. The dams become a big sediment sink and this sink will persist for centuries until the dams are filled (Figure 12).

Sediment connectivity between the mainstem and the lakes is also declining. More than 1,000 of river-connected lakes were once present across

the middle-lower basin. However, their number has reduced by a factor of 10 in the past century due to river regulation and reclamation in lakes (Cui et al., 2013). Only large lakes such as the Dongting and Poyang lakes have retained their river-lake connections (Figure 1). Although, the surface area and volume of the two lakes have decreased historically owing to reclamation and sedimentation (Feng et al., 2013; Zhao et al., 2013; Guo et al., 2018). The connectivity between the main river and the two natural lakes is further weakened owing to declined river-lake interaction. The river stage along the mainstream is falling owing to the regulated river discharge and channel degradation (Han et al., 2017; Guo et al., 2018). This drop relieves the backwater effect exerted on the lake outflow and even induces a draining effect which fosters the outflow from the lakes (Guo et al., 2011, 2018; Mei et al., 2016; Zhang et al., 2013; Figure S9). This altered river-lake interplay may explain the hastened and endured low-water conditions that have occurred more frequently within the lakes since the turn of the century. To conserve the lake ecosystem and counteract the draining effect, plans have been made to construct barriers with sluices at the lake mouths to regulate lake outflows (Wang et al., 2015b). This measure may further reduce the river-lake connectivity, and its environmental and ecological impacts are insufficiently documented and remain in dispute.

The middle-lower river downstream of Yichang once behaved as a sediment transport conduit transferring upstream sediment to the delta and the seas. It was a predominantly sediment-transport-limited condition. The middle-lower river has, however, changed from a mild depositional environment to a severe erosional environment in response to a decline in incoming sediment flux. We infer that the middle-lower main river has experienced a change from being sediment-transport-limited prior to 1985, to being sediment-supply-limited in the post-TGD era from 2003 onward. During the intervening period of 1985-2003, the reach was in transition between these two states.

The middle-lower mainstream was progressively diked and leveed in order to

protect the low-lying but densely populated middle-lower CRB from river floods. The dikes and levees constrict water and sediment transport within the main channel, prevent overbank flow, and isolate the floodplains from river connection. Therefore, the dikes and the levees enhance the transfer of sediment within the mainstem and have reduced the river-floodplain connectivity (Figure 12). Constraining the system reduces the possible system states (e.g., loss of floodplains for flood storage) and thereby limits the ability and resilience of the system in using its many natural degrees of freedom to adapt to changes and extreme events. Overall, the basin-scale sediment connectivity has declined both longitudinally by the hydropower dams and laterally by the levees and weakened river-lake interplay in the CRB.

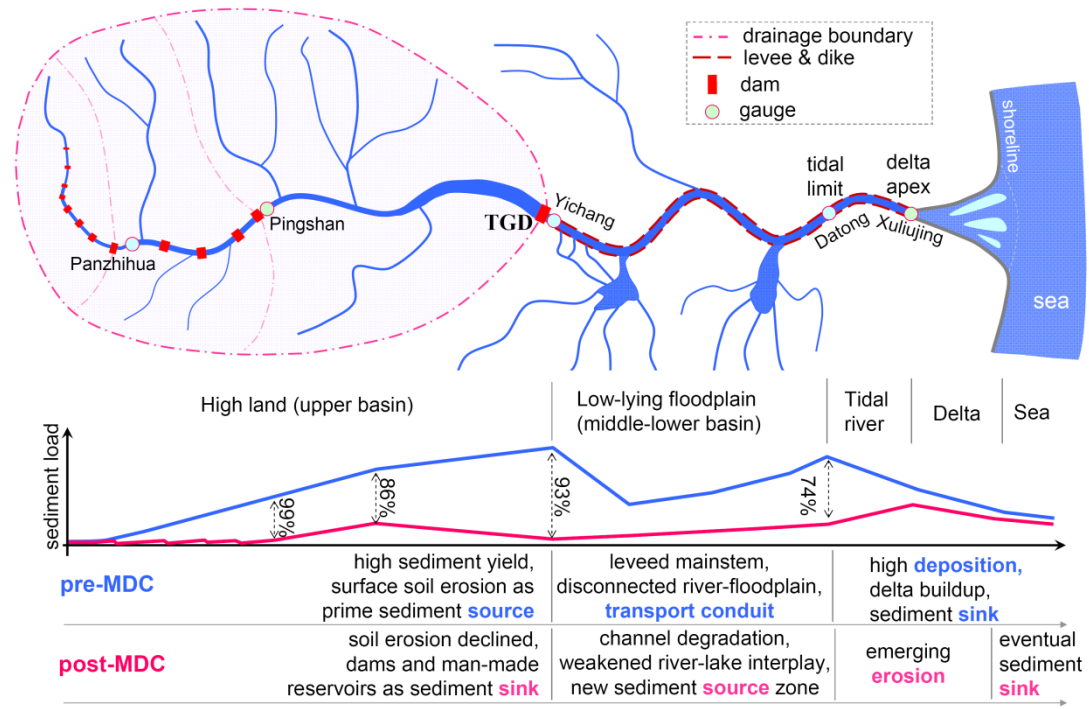


Figure 12. Sketches of the dammed and leveed CRB system, along-river changes of sediment loads, and sediment source to sink shifts under the pre-dam and post-dam conditions. MDC indicates major dam construction. The vertical and horizontal axes in the lower plot are illustrative and not to scale.

The sediment load reduction and connectivity decline have fundamental consequences for the fluvial hydro-geomorphology and land-ocean

interactions (Figure 11). For example, severe channel degradation has lowered the river stages by ~1.5 m at Yichang under a river discharge of 10,000 m³/s between 1960 and 2003 and further by ~1.0 m by 2017 (Yang et al., 2017; Guo et al., 2018). This drop in river stage threatens irrigation and the levees. The shrinkage of natural lakes and the altered river-lake interplay impairs their water supply and flood mitigation function (Li et al., 2009; Fang et al., 2012). Retention of nutrients and organic matter absorbed to sediments may alter the land-to-ocean biogeochemical cycling (Zhang et al., 2015; Figure 11). Delta erosion is expected as a result of decline in river-borne sediment and sea-level rise (Zhao et al., 2018). In the longer term, removal of the aged hydropower dams would reactivate large quantities of stored sediment, with the potential to induce a very different shift in river system shift. Therefore there is an urgent need to develop integrated basin-scale management strategies that move away from the present operational focus on hydropower dam operation and flood control to take a more holistic view that seeks to restore resilience and the capacity of the system to adapt to future changes.

The sediment budget analyses are influenced by the uncertainties in the data and a lack of information on ungauged small tributaries and sand mining. The sediment loads from the small tributaries and landslides stand out as important and unignorable sources to the mainstem. The lack of information on extensive sand mining and dredging may have also led to an overestimation of the influences of the TGD on sediment load reduction in the downstream river. From this perspective, we identify several key knowledge gaps that merit future study. First, more field data and comprehensive modeling tools are needed to separate and to better quantify the impacts of climate change and human activities on streamflow and sediment load changes, particularly regarding land use changes and their subsequent impact on sediment yield. Second, the basin-scale sediment production, sediment runoff, and sediment delivery and deposition at different time scales, even at geological time scales, need to be better tracked and quantified by using integrated models and

geochemical proxies. Third, understanding the hydro-morphological changes and associated time scales downstream of the TGD will help to develop management policies and restoration opportunities. This will require continued monitoring of river bathymetry and sediment loads in the future. Moreover, development of large-scale morphodynamic models that incorporate textural changes and morphodynamic feedback mechanisms could make a valuable contribution.

4.3 The global context

The CRB is not the only large river undergoing intensive human interference and dramatic sediment load reduction. For example, the sediment supply to the sea from the Nile River has nearly vanished because of the sediment trapping effects of the New Aswan Dam and sediment deposition in the deltaic channel networks (Stanley, 1996; Vörösmarty et al., 2003). Hydropower dams and river engineering activities (e.g., bank revetment and meander cutoffs) have caused sediment load reduction from ~400 Mt yr⁻¹ to 145 Mt yr⁻¹ in the Mississippi River (Meade and Moody, 2010), resulting in delta erosion and shoreline retreat which, in turn, have made the restoration of habitats and the provision of flood defense more challenging (Blum and Roberts, 2009). The Yellow River, once the most sediment-laden river in the world, has experienced a sediment flux reduction from 1,221 Mt yr⁻¹ in the 1950s to 143 Mt yr⁻¹ in the 2000s as a result of reforestation and dam construction (Wang et al., 2016). In addition, increased water abstraction has reduced the streamflow in the Yellow River, which is partially responsible for the sediment load decline (Miao et al., 2011). Similar sediment load reductions are present in other large rivers such as the Amazon River (Latrubesse et al., 2017), the Mekong River (Kummu et al., 2010; Schmitt et al., 2017), and the Ebro River (Tena and Batalla, 2013). The Mekong and the Amazon rivers are two large systems that are strongly influenced by recent hydropower dam construction, comparable to the Mississippi and Changjiang rivers. Overall, the

sediment load reduction is much more significant than the streamflow changes in the majority of rivers, suggesting that human-induced land use changes and dams play a more profound role than climate change. Given the dramatic changes that have occurred in most large rivers around the world, the mapping of continent-scale sediment flux by Milliman and Meade (1983) and Syvitski et al. (2005) now requires updating. The cumulative impact of this sediment load reduction on global land-to-ocean transport and the flux of organic matter, nutrients and contaminants also need to be re-evaluated.

The basin-scale sediment connectivity and source-to-sink patterns under natural conditions, identified in Schumm (1976), are modified by large-scale human development and activities. This can result in fragmented river systems where network connectivity is altered, which often disrupts established sources and sinks, thereby disrupting the functional role of the constituent parts of the system. Such source-sink changes are ubiquitous in many rivers such as the Mississippi (Bentley et al., 2016) and the CRB in this study. To some degree, fluvial systems are resilient to sediment load changes in response to dam construction and land use changes by channel morphodynamic adjustment. For example, Nittrouer and Viparelli (2014) reported that the sand content has not decreased significantly in the lower 1,100 km of the Mississippi River after major dam construction in the upstream basin due to sediment recruitment from bed scour. The degree of sediment load recovery, however, depends on the bed sediment composition and the distance between the dam and the delta. The opportunity for sediment recovery is smaller if the dam is located in the lower river close to the delta, such as the Aswan Dam in the Nile. Sediment recovery can also be constrained by a limited availability of fine sediments on the bed, such as the river below the TGD in the Changjiang system, even though the TGD is ~1,800 km upstream of the delta (Yang et al. 2017; Lai et al., 2017). Similar sediment-supply-limited conditions were also observed in the Colorado River after the construction of the Glen Canyon Dam (Topping et al., 2000a, 2000b) and in the Green River (Grams and Schmidt, 2005). The

Colorado River in the Glen Canyon, USA, is still adjusting to sediment-supply limitation more than 50 years after the Glen Dam was completed and sediment inputs from tributary streams may take decades to fully propagate through the mainstem river system (Topping et al., 2018). Predicting the time at which river erosion and sediment load recovery will stop, however, is still technically challenging owing to the lack of information on bottom sediment composition, uncertainty in sediment transport models, and complexity of large-scale morphodynamic changes in rivers (Castelltort and Van Den Driessche, 2003; Di Silvio and Nones, 2014; Lai et al., 2017).

5. Conclusions

This work provides a synthesis of the sediment delivery pattern and its spatial and temporal changes throughout the CRB based on a comprehensive examination of a long time series of sediment load data. We briefly discuss the causes, the implications, and impacts of sediment load changes when considering the entire river system. Overall, the Changjiang River has become increasingly sediment deficient and has experienced insignificant streamflow changes alongside progressive sediment load reduction. Sediment loads at most stations began to decline in the mid-1980s, followed by an abrupt drop since 2003 in the river downstream of the TGD. The sediment loads have continued to decrease since 2013 owing to the newly built large dams upstream of the TGD. The sediment loads at the outlets of the upper basin and the entire basin have reduced by 96% and 74% in 2006-2017 compared with 1950-1985 data, from $523.0 \pm 103.7 \text{ Mt yr}^{-1}$ to $22.1 \pm 17.2 \text{ Mt yr}^{-1}$ and from $470.4 \pm 71.4 \text{ Mt yr}^{-1}$ to $137.3 \pm 41.5 \text{ Mt yr}^{-1}$, respectively. The Changjiang River is therefore becoming another heavily dammed large river undergoing substantial sediment load reduction.

The large hydropower dams constructed in the mainstem are the prime cause of the sediment load reduction. Sediment recruitment from channel degradation and the lakes has mitigated the reduction in the downriver,

although the sediment flux reaching the delta is still significantly lower than the pre-dam level. The sediment loads are highly likely to persist at low levels in the coming decades to centuries in response to the cumulative dam impacts and the diminishing contribution from channel erosion.

The middle-lower river has changed from a slightly depositional environment and a sediment transport conduit to a severe erosional environment and a prime sediment source zone. Delivery of suspended sediment in the middle-lower river has also changed from transport-limited condition to supply-limited conditions. Sediments from river erosion below the TGD have become the main sediment source to the delta and the sea. Severe channel incision has lowered the bed level and river stage, which has weakened the river-lake interplay and has caused numerous hydro-geomorphological changes. The basin-scale sediment connectivity has declined as the upper river has been progressively dammed and the middle-lower river has been extensively dyked and leveed, and river-lake interplay has weakened. A sediment source shift is ongoing from surface soil erosion in the upper basin, to river channel erosion in the middle-lower basin, which is accompanied by changes in sediment composition and the associated nutrient loading.

We identified several research topics for future study and propose that integrated sediment management is critically needed. The Changjiang River is not the first and will not be the last large river that is heavily dammed and affected by climate change and human activities. The findings derived in the CRB have implications for evaluation of the human impacts in other large river systems, such as the Amazon and Mekong rivers, that are also subject to ongoing dam construction. Furthermore, this study highlights the need for updating the estimates of the global land-to-ocean terrestrial material flux.

Acknowledgements

This work is supported by the project 'Coping with deltas in transition' within the Programme of Strategic Scientific Alliance between China and The Netherlands (PSA), financed by the Ministry of Science and Technology, P.R. China (MOST) (No. 2016YFE0133700) and Royal Netherlands Academy of Arts and Sciences (KNAW) (No. PSA-SA-E-02), and also partly by MOST project (No. 2017YFE0107400), Natural Science Foundation of China (Nos. 51739005, 41776062, 41876091), Shanghai Committee of Science and Technology (Nos. 18DZ1206400), Shanghai Rising-Star Program (19QA1402900), and the Fundamental Research Funds for the Central Universities. We thank Efi Foufoula-georgiou (UC Irvine), Shouye Yang (Tongji University), Shu Gao (ECNU), Jing Zhang (ECNU), and Weiguo Zhang (ECNU) for their insightful comments during the framing and writing of this work. The data used in this work are collected from official government bulletins and publications and are available on request. We also thank the reviewer Prof. Michael Church and another anonymous reviewer for their constructive and insightful comments and suggestions that helped to greatly improve this work.

References

- Bentley Sr. S.J., Blum M.D., Maloney J., Pond L., Paulsell R., 2016. The Mississippi River source-to-sink system: perspectives on tectonic, climate, and anthropogenic influences, Miocene to Anthropocene. *Earth-Science Reviews* 153, 139–174.
- Blum M.D., Roberts H.H., 2009. Drowning of the Mississippi Delta due to insufficient sediment supply and global sea-level rise. *Nature Geoscience*, doi:10.1038/NGE0553.
- Bracken L.J., Turnbull L., Wainwright J., Bogaart P., 2015. Sediment connectivity: a framework for understanding sediment transfer at multiple scales. *Earth Surface Processes and Landforms* 40, 177-188.
- Buishand T.A., 1982. Some methods for testing the homogeneity of rainfall

- records. *Journal of Hydrology* 58(1–2), 11–27.
- Brune G.M., 1953. Trap efficiency of reservoirs. *Transactions of the American Geophysical Union* 34, 407–418.
- Castelltort S., van den Driessche J., 2003. How plausible are high-frequency sediment supply-driven cycles in the stratigraphic record? *Sedimentary Geology* 157, 3–13.
- Castino F., Bookhagen B., Strecker M.R., 2016. River-discharge dynamics in the Southern Central Andes and the 1976-1977 global climate shift. *Geophysical Research Letters* 43, doi:10.1002/2016GL70868.
- Chen Y., Zhang S., Huang D., Li B.-L., Liu J., Liu W., Ma J., Wang F., Wang Y., Wu S., Wu Y., Yan J., Guo C., Xin W., Wang H., 2017. The development of China's Yangtze River Economic Belt: how to make it in a green way? *Science Bulletin* 62(9), 648–651.
- Chen Z.Y., Li J.F., Shen H.T., Wang Z.H., 2001. Yangtze River of China: historical analysis of discharge variability and sediment flux. *Geomorphology* 41, 77–91.
- Chen Z.Y., Wang Z.H., Finlayson B., Chen J., Yin D.W., 2010. Implications of flow control by the Three Gorges Dam on sediment and channel dynamics of the middle Yangtze (Changjiang) River, China. *Geology* 38(11), 1043–1046.
- China Water Resources Ministry (CWRM) (ed.). 2001-2018. River sediment bulletin of China. Water Publication Press, Beijing, China, pp.1–17.
- CIPM Yangtze Joint Venture (CYJV), 1988. Three Gorges Water Control Project Feasibility Study, People's Republic of China, vol. 5, Sediment, pp. 214.
- Cui L.J., Gao C.J., Zhao X.S., Ma Q.F., Zhang M.Y., Li W., Song H.T., Wang Y.F., Li S.N., Zhang Y., 2013. Dynamics of the lakes in the middle and lower reaches of the Yangtze River basin, China, since the late nineteenth century. *Environmental Monitor Assessment* 185, 4005-4018.
- Dai S.B., Lu X.X., 2014. Sediment load change in the Yangtze River (Changjiang): a review. *Geomorphology* 215, 60–73.

- 2738
2739
2740
2741 1075 Di Silvio G., Nones M., 2014. Morphodynamic reaction of a schematic river to
2742 1076 sediment input changes: analytical approaches. *Geomorphology* 215, 74–82.
2743
2744 1077 Dynesius M., Nilsson C., 1994. Fragmentation and flow regulation of river
2745
2746 1078 systems in the northern third of the world. *Science* 266, 753–762.
2747
2748 1079 East A.E., Logan J.B., Mastin M.C., Ritchie A.C., Bountry J.A., Magirl C.S.,
2749
2750 1080 Sankey J.B., 2018. Gormorphic evolution of a gravel-bed river under
2751
2752 1081 sediment-starved versus sediment-rich conditions: river response to the
2753
2754 1082 world's largest dam removal. *Journal of Geophysical Research: Earth*
2755
2756 1083 *Surface* 123, 3338–3369.
2757
2758 1084 Fang H.W., Han D., He G., Chen M., 2012. Flood management selections for
2759
2760 1085 the Yangtze River midstream after the Three Gorges Project operation.
2761
2762 1086 *Journal of Hydrology* 432–433, 1–11.
2763
2764 1087 Feng L., Hu C.M., Chen X.L., Zhao X., 2013. Dramatic inundation changes of
2765
2766 1088 China's two largest freshwater lakes linked to the Three Gorges Dam.
2767
2768 1089 *Environmental Science Technology* 47, 9628–9634.
2769
2770 1090 Gao J.H., Jia J.J., Kettner A.J., Xing F., Wang Y.P., Li J., Bai F.L., Zou X.Q.,
2771
2772 1091 Gao S., 2015. Reservoir-induced changes to fluvial fluxes and their
2773
2774 1092 downstream impacts on sedimentary processes: The Changjiang (Yangtze)
2775
2776 1093 River, China. *Quaternary International*,
2777
2778 1094 <http://dx.doi.org/10.1016/j.quaint.2015.03.015>.
2779
2780 1095 Gemmer M., Jiang T., Su B.D., Kundzewicz Z.W., 2008. Seasonal precipitation
2781
2782 1096 changes in the wet season and their influence on flood/drought hazards in
2783
2784 1097 the Yangtze River basin, China. *Quaternary International* 186(1), 12–21.
2785
2786 1098 Grams P.E., Schmidt J.C., 2005. Equilibrium or indeterminate? Where
2787
2788 1099 sediment budgets fail: Sediment mass balance and adjustment of channel
2789
2790 1100 form, Green River downstream from Flaming Gorge Dam, Utah and
2791
2792 1101 Colorado. *Geomorphology* 71, 156–181.
2793
2794 1102 Griffiths R.E., Topping D.J., 2017. Importance of measuring discharge and
2795
2796 1103 sediment transport in lesser tributaries when closing sediment budgets.
1104 *Geomorphology* 296, 59–73.

- 2797
2798
2799
2800 1105 Gu H.Y., Ian D., 1989. Spatial and temporal dynamics of land degradation and
2801 1106 fluvial erosion in the middle and upper Yangtze River basin, China. *Land*
2802 1107 *Degradation & Rehabilitation* 1, 217–235.
- 2805 1108 Guo H., Hu Q., Zhang Q., Feng S., 2011. Effects of the Three Gorges Dam on
2806 1109 the Yangtze River flow and river interaction with Poyang Lake, China: 2003–
2808 1110 2008. *Journal of Hydrology* 416–417, 19–27.
- 2810 1111 Guo L.C., Su N., He Q., Zhu C.Y., 2018. How have the river discharges and
2812 1112 sediment loads changed in the Changjiang River basin downstream of the
2813 1113 Three Gorges Dam? *Journal of Hydrology* 560, 259–274.
- 2816 1114 Guo T.F. (ed.), 2015. *Water and sediment conservation in the Changjiang*
2817 1115 *River basin*. Changjiang Press, Wuhan, China.
- 2819 1116 Han J.Q., Sun Z.H., Li Y.T., Yang Y.P., 2017. Combined effects multiple large-
2821 1117 scale hydraulic engineering on water stages in the middle Yangtze River.
2822 1118 *Geomorphology* 298, 31–40.
- 2825 1119 Hassan M.A., Church M., Yan Y.X., Slaymaker O., 2010. Spatial and temporal
2826 1120 variation of in-reach suspended sediment dynamics along the mainstem of
2828 1121 the Changjiang (Yangtze River), China. *Water Resources Research* 46,
2829 1122 W11551, doi:10.1029/2010WR009228.
- 2832 1123 Hassan M.A., Church M., Yan Y.X., Slaymaker O., Xu J.X., 2011. Suspended
2833 1124 sediment balance for the mainstem of the Changjiang (Yangtze River) in the
2835 1125 period 1964–1985. *Hydrological Processes* 25, 2339–2353.
- 2837 1126 Hoffmann T., Thorndycraft V.R., Brown A.G., Coulthard T.J., Damnati B., Kale
2839 1127 V.S., Middlekoop H., Notebaert B., Walling D.E., 2010. Human impact on
2840 1128 fluvial regimes and sediment flux during the Holocene: review and future
2841 1129 research agenda. *Global and Planetary Change* 72, 87–98.
- 2843 1130 Higgitt D.L., Lu X.X., 1999. Challenges in relating land use to sediment yield in
2844 1131 the upper Yangtze. *Hydrobiologia* 410, 269–277.
- 2848 1132 Hinderer M., 2012. From gullies to mountain belts: A review of sediment
2849 1133 budgets at various scales. *Sedimentary Geology* 280, 21–59.
- 2851 1134 Hu B.Q., Yang Z.S., Wang H.J., Sun X.X., Bi N.S., Li G.G., 2009.

- 1135 Sedimentation in the Three Gorges Dam and the future trend of Changjiang
1136 (Yangtze River) sediment flux to the sea. *Hydrology and Earth System*
1137 *Science* 13, 2253–2264.
- 1138 Kendall M.G., 1975, Rank correlation methods. Griffin, London.
- 1139 Kondolf G.M., Matthews W.V.G., 1991. Unmeasured residuals in sediment
1140 budgets: A cautionary Note. *Water Resources Research* 27, 2453–2486.
- 1141 Kumm M., Lu X.X., Wang J.J., Varis O., 2010. Basin-wide sediment trapping
1142 efficiency of emerging reservoirs along the Mekong. *Geomorphology* 119,
1143 181–197.
- 1144 Lai X.H., Yin D.W., Finlaysoon B.L., Wei T.Y., Li M.T., Yuan W.H., Yang S.L.,
1145 Dai Z.J., Gao S., Chen Z.Y., 2017. Will river erosion below the Three Gorges
1146 Dam stop in the middle Yangtze? *Journal of Hydrology* 554, 24–31.
- 1147 Lai X.J., Shankman D., Huber C., Yesou H., Huang Q., Jiang J.H., 2014. Sand
1148 mining and increasing Poyang Lake's discharge ability: a reassessment of
1149 causes for lake decline in China. *Journal of Hydrology* 519, 1698–1706.
- 1150 Latrubesse E.M., Arima E.Y., Dunne T., Park E., Baker V.R., d'Horta F.M.,
1151 Wight C., Wittmann F., Zuanon J., Baker P.A., Ribas C.C., Norgaard R.B.,
1152 Filizola N., Ansar A., Flyvbjerg B., Stevaux J.C., 2017. Damming the rivers of
1153 the Amazon basin. *Nature* 546, 363–369.
- 1154 Li K.F., Zhu. C., Wu, L., Huang, L.Y., 2013. Problems caused by the Three
1155 Gorges Dam construction in the Yangtze River basin: a review.
1156 *Environmental Reviews* 21(3), 127–135.
- 1157 Li Y.T., Sun Z.H., Liu Y., Deng J.Y., 2009. Channel degradation downstream
1158 from the Three Gorges Project and its impact on flood level. *Journal of*
1159 *Hydraulic Engineering* 135, 718–728.
- 1160 Liu C.M., Zuo D.K., 1987. Environmental issues of the Three Gorges Project,
1161 China. *Regulated Rivers: Research and Management* 1, 267–273.
- 1162 Liu H.J., Lan H.X., Liu Y., Zhou Y., 2010. Characteristics of spatial distribution
1163 of debris flow and the effect of their sediment yield in main downstream of
1164 Jinsha River, China. *Environmental Earth Sciences* 64, 1653–1666.

- 1165 Mann H.B., 1945. Nonparametric tests against trend. *Econometrica* 13, 245-
1166 259.
- 1167 Meade R.H., Moody J.A., 2010. Causes for the decline of suspended-sediment
1168 discharge in the Mississippi River system, 1940-2007. *Hydrological*
1169 *Processes* 24, 35–49.
- 1170 Mei X.F., Dai Z.J., Fagherazzi S., Chen J.Y., 2016. Dramatic variations in
1171 emergent wetland area in China's largest freshwater lake, Poyang Lake.
1172 *Advances in Water Resources* 96, 1–10.
- 1173 Miao C.Y., Ni J.R., Borthwick A.G.L., Yang L., 2011. A preliminary estimate of
1174 human and natural contributions to the changes of water discharge and
1175 sediment load in the Yellow River. *Global and Planetary Change* 76, 196–
1176 205.
- 1177 Milliman J.D., Meade R.H., 1983. World-wide delivery of river sediment to the
1178 oceans. *The Journal of Geology* 91, 1–21.
- 1179 Milliman J.D., Ren M.E., 1995. River flux to the sea: impact of human
1180 intervention on river systems and adjacent coastal areas. In: D. Eisma (ed.),
1181 *Climate Change Impact on Coastal Habitation*. CRC Press, Boca Raton,
1182 Florida, pp.57–84.
- 1183 Nittrouer J.A., Viparelli E., 2014. Sand as a stable and sustainable resource for
1184 nourishing the Mississippi River delta. *Nature Geoscience*, doi:
1185 10.1038/NGEO2142.
- 1186 Pan J.G., 1997. Study on sediment transport characteristics in Jinsha River
1187 basin. *Bulletins of Soil and Water Conservation* 17(5), 35-40 (in Chinese
1188 with an abstract in English).
- 1189 Parsons A.J., 2011. How useful are catchment sediment budgets? *Progress in*
1190 *Physical Geography* 36, 60-71.
- 1191 Schmitt R.J.P., Rubin Z., Kondolf G.M., 2017. Losing ground—scenarios of land
1192 loss as consequence of shifting sediment budgets in the Mekong Delta.
1193 *Geomorphology* 294, 58-69.
- 1194 Schumm S.A., 1977. *The fluvial system*. Wiley, New York, pp.338.

- 1195 Shi Y.L., Yang W., Ren M.E., 1985. Hydrological characteristics of the
1196 Changjiang and its relation to sediment transport to the sea. *Continental*
1197 *Shelf Research* 4, 5–15.
- 1198 Stanley J., 1996. Nile delta: extreme case of sediment entrapment on a delta
1199 plain and consequent coastal land loss. *Marine Geology* 129, 189–195.
- 1200 Syvitski J.P.M., Vörösmarty C.J., Kettner A.J., Green P., 2005. Impacts of
1201 humans on the flux of terrestrial sediment to the global coastal ocean,
1202 *Science* 308(5720), 376–380.
- 1203 Syvitski J.P.M., Saito Y., 2007. Morphodynamics of deltas under the influence
1204 of humans. *Global and Planetary Change* 57(3), 261–282.
- 1205 Taylor W.A., 2000. Change-point analysis: a powerful new tool for detecting
1206 changes. *Analysis*, 1–19.
- 1207 Tena A., Batalla R.J., 2013. The sediment budget of a large river regulated by
1208 dams (the lower River Ebro, NE Spain). *Journal of Soils and Sediments* 13,
1209 966–980.
- 1210 Topping D.J., Rubin D.M., Vierra Jr. L.E., 2000a. Colorado River sediment
1211 transport 1. Natural sediment supply limitation and the influence of Glen
1212 Canyon Dam. *Water Resource Research* 36(2), 515–542.
- 1213 Topping D.J., Rubin D.M., Nelson J.M., Kinzel III P.J., Corson I.C., 2000b.
1214 Colorado River sediment transport 2. Systematic bed-elevation and grain
1215 size effects of sand supply limitation. *Water Resource Research* 36(2), 543–
1216 570.
- 1217 Topping D.J., Mueller E.R., Schmidt J.C., Griffiths R.E., Dean D.J., Grams P.E.,
1218 2018. Long-term evolution of sand transport through a river network: relative
1219 influences of a dam versus natural changes in grain size from sand waves.
1220 *Journal of Geophysical Research: Earth Surface* 123, 1879–1909.
- 1221 Vörösmarty C.J., Meybeck M., Feket B., Sharma K., Green P., Syvitski J.P.M.,
1222 2003. Anthropogenic sediment retention: major global impact from
1223 registered river impoundments. *Global and Planetary Chang* 39, 169–190.
- 1224 Walling D.E., Fang D., 2003. Recent trends in the suspended sediment loads

- of the world's rivers. *Global and Planetary Change* 39(1–2), 111–126.
- Walling D.E., 2006. Human impact on land-ocean sediment transfer by the world's rivers. *Geomorphology* 79, 192–216.
- Wang H.J., Yang Z.S., Wang Y., Saito Y., Liu J.P., 2008. Reconstruction of sediment flux from the Changjiang (Yangtze River) to the sea since the 1860s. *Journal of Hydrology* 349, 318–332.
- Wang J., Jin Z.D., Hilton R.G., Zhang F., Densmore A.L., Li G., Joshua West A.J., 2015a. Controls on fluvial evacuation of sediment from earthquake-triggered landslides. *Geology* 43(2), 115–118.
- Wang P., Lai G.Y., Li L., 2015b. Predicting the hydrological impacts of the Poyang Lake Project using an EFDC model. *Journal of Hydrologic Engineering* 20(12), [https://doi.org/10.1061/\(ASCE\)HE.1943-5584.0001240](https://doi.org/10.1061/(ASCE)HE.1943-5584.0001240).
- Wang S., Fu B.J., Piao S.L., Lu Y.H., Ciais P., Feng X.M., Wang Y.F., 2016. Reduced sediment transport in the Yellow River due to anthropogenic changes. *Nature Geoscience* 9, 38–41, doi:10.1038/NGEO2602.
- Wang W.G., Xing W.Q., Yang T., Shao Q.X., Peng S.Z., Yu Z.B., Yong B., 2012. Characterizing the changing behaviors of precipitation concentration in the Yangtze River Basin, China. *Hydrological Processes* 27(24), 3375–3393.
- Wang Z.Q., Chen Z.Y., Li M.T., Chen J., Zhao Y.W., 2009. Variations in downstream grain-sizes to interpret sediment transport in the middle-lower Yangtze River, China: a pre-study of Three-Gorges Dam. *Geomorphology* 113, 217–229.
- Wang Z.Y., Li Y.T., He P.Y., 2007. Sediment budget of the Yangtze River. *Water Resources Research* 43, W04401, doi:10.1029/2006WR005012.
- Wei J., He X.B., Bao Y.H., 2011. Anthropogenic impacts on suspended sediment load in the Upper Yangtze River. *Regional Environmental Change* 11, 857–868.
- Xu K.H., Milliman J.D., 2009. Seasonal variations of sediment discharge from the Yangtze River before and after impoundment of the Three Gorges Dam.

- Geomorphology 104(3-4), 276–283.
- Xu K.Q., Chen Z.Y., Zhao Y.W., Wang Z.H., Zhang J.Q., Hayashi S., Murakami S., Watanabe M., 2005. Simulated sediment flux during 1998 big-flood of the Yangtze (Changjiang) River, China. *Journal of Hydrology* 313, 221–233.
- Xu Q.X., 2013. Study of sediment deposition and erosion patterns in the middle and downstream Changjiang mainstream after impoundment of TGR. *Journal of Hydroelectric Engineering* 32(2), 146-154.
- Xu X.B., Tan Y., Yang G.S., 2013. Environmental impact assessments of the Three Gorges Project in China: issues and interventions. *Earth Science Reviews* 124, 115–125.
- Yang H.F., Yang S.L., Xu K.H., Milliman J.D., Wang H.J., Yang Z.S., Chen Z.Y., Zhang C.Y., 2018. Human impacts on sediment in the Yangtze River: a review and new perspectives. *Global and Planetary Change* 162, 8–17.
- Yang S.L., Milliman J.D., Li P., Xu K., 2011. 50000 dams later: erosion of the Yangtze River and its delta. *Global Planetary Change* 75, 14–20.
- Yang S.L., Milliman J.D., Xu K.H., Deng B., Zhang X.Y., Luo X.X., 2014. Downstream sedimentary and geomorphic impacts of the Three Gorges Dam on the Yangtze River. *Earth-Science Review* 138, 469–486.
- Yang S.L., Xu K.H., Milliman J.D., Yang H.F., Wu C.S., 2015. Decline of Yangtze River water and sediment discharge: impact from natural and anthropogenic changes. *Scientific Reports* 5, 12581, doi:10.1038/srep12581.
- Yang X.K., Lu X.X., 2014. Estimate of cumulative sediment trapping by multiple reservoirs in large river basins: an example of the Yangtze River basin. *Geomorphology* 227, 49–59.
- Yang Y.P., Zhang M.J., Zhu L.L., Liu W.L., Han J.Q., Yang Y.H., 2017. Influence of large reservoir operation on water-levels and flows in reaches below dam: case study of the Three Gorges Reservoir. *Scientific Reports* 7, 15640, doi:10.1038/s41598-017-15677-y.
- Yang Z.S., Wang H.J., Saito Y., Milliman J.D., Xu K.H., Qiao S., Shi G., 2006.

- Dam impacts on the Changjiang (Yangtze) River sediment discharge to the sea: the past 55 years and after the Three Gorges Dam. *Water Resources Research* 42, W04407, doi:10.1029/2005WR003970.
- Yin H.F., Liu G.R., Pi J.G., Chen G.J., Li C.G., 2007. On the river-lake relationship of the middle Yangtze reaches. *Geomorphology* 85 197–207.
- Zhang, J., Wu, Y., Zhang, Y.Y., 2015. Plant nutrients and trace elements from the Changjiang watershed to the East China Sea. In: J. Zhang (ed.), *Ecological continuum from the Changjiang (Yangtze River) watersheds to the East China Sea continental margin*, Springer, Switzerland, doi:10.1007/978-3-319-16339-0_5.
- Zhao J., Guo L.C., He Q., Wang Z.B., van Maren D.S., Wang X.Y., 2018. An analysis on half century morphological changes in the Changjiang Estuary: spatial variability under natural processes and human intervention. *Journal of Marine Systems* 181, 25–36.
- Zhao S.Q., Fang J.Y., Miao S.L., Gu B., Tao S., Peng C.H., Tang Z.Y., 2013. The 7-decade degradation of a large freshwater lake in the central Yangtze River, China. *Environmental Science Technology* 39, 431–436.
- Zheng S.R., 2016. Reflections on the Three Gorges Project since its operation. *Engineering* 2, 389–397.
- Zhou G.Y., Xiang Z.A., 1994. Sediment transport in the Yangtze basin. *Proceedings of the Canberra Symposium on Variability in Stream Erosion and Sediment transport*. IAHS Publication No. 224, 291–296.

Supplementary Information of the Manuscript entitled 'From the headwater to the delta: a basin-scale synthesis of sediment load regime in the Changjiang River' by Guo et al.

S1. Additional information on causes of sediment load changes

In this section we provide a brief review of the factors influencing sediment loads in the CRB (Table S1), i.e., the hydro-meteorological influences, land use changes, hydropower dams, channel degradation, and sand mining, as additional supporting information to section 4.1 in the main text where the impact of dams and sediment recruitment are discussed.

Table S1. The primary enablers and inhibitors of sediment load changes in the CRB.

* More information on land use changes is provided in section S2.

| Enablers (increase) | Inhibitors (reduction) |
|---|---|
| deforestation due to land use changes* | reforestation (since late 1980s) |
| land slides & debris flow (in the upper basin) | retention dams (reduce sediment runoff) |
| channel erosion (along the middle-lower river) | hydropower dams (disrupt sediment delivery) |
| sand mining activities (in stirring bed sediments for suspension transport) | long-term effect of sand mining (causing degradation) |
| shift from lake sedimentation to erosion | |

Hydro-meteorological changes

The mean air temperature across the CRB has increased slightly since the 1980s, indicating warming regional climate (Sang et al., 2012). The precipitation averaged over the entire CRB exhibits a significant decreasing trend since 1950 (Wang et al., 2012; Zhang et al., 2014; Chen et al., 2016) (Figure S1). There have been attempts to establish a correlation between precipitation and river discharge to explain streamflow and sediment load changes in the CRB (Yang et al., 2005). Large uncertainties, however, are present in those estimations because evapotranspiration, surface runoff generation and their spatial variability were not fully considered. The streamflow

regime has not changed much although there are apparent changes of air temperature and precipitation (Chen et al., 2016; Guo et al., 2018). This suggests that the sediment transport capacity of the river flow has not changed significantly assuming insignificant change of longitudinal hydraulic gradient and sediment grain size.

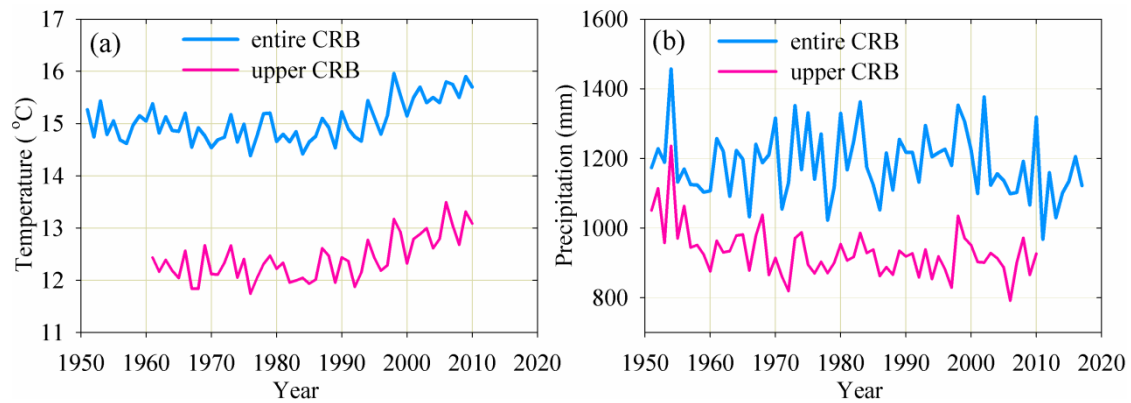


Figure S1. Changes of annual (a) temperature and (b) precipitation in the upper CRB and in the CRB as a whole (data source of Guo et al., 2018)

Land use changes

In response to rapid socioeconomic development, the population in the CRB has increased from 229.2 million in 1951 to 380.3 million in 1978 and 492.7 million in 2010. The total economic GDP output of the CRB has increased from 83.1 billion in 1978 to 4611.4 billion US dollar in 2016 (Chen et al., 2017). These achievements are based on increasing urbanization, mineral mining, river engineering and infrastructure development which possibly cause deforestation and more sediment production. One example is the chopping down of trees for steel mill construction in the 1950s and 1960s (a turbulent period of Chinese history). The sediment yield in the upper basin was indeed larger in the decade of 1963-1972 compared to the decades before and after (Gu and lan, 1989), implicating the influence of land use changes. In general, the land area subject to surface erosion has increased from ~364,000 km² in 1958 to 622,200 km² in the mid-1980s (Guo, 2015), and the forest coverage of the CRB as a whole has reduced from 28% in 1950s to 17% in 1980s (Yang et al., 2018). The land surface area subject to hydraulic erosion had nearly doubled between 1950 and 2001,

i.e., an increase from 364 to 707 billion m² (Yang et al., 2004). These changes may explain the sediment load increase in the tributaries (e.g., Yalong, Min, and Jialing rivers) and in the mainstem between Shigu and Zhutuo in the period prior to 2000.

Large-scale reforestation measures have been implemented in the upper CRB since the late 1980s, particularly in the regions with a high sediment yield (e.g., the Jinsha River and the upper regions of the Jialing River). According to the government bulletins, a total of 63,000 km² of reforestation (~3.8% of CRB area) was achieved as of 2000 (CWRM, 2001), and 96,200 km² of land subject to severe soil erosion was effectively restored between 1989 and 2008 (Guo, 2015). Another 147,300 km² land was reforested in 2006-2015. The forest coverage in the upper CRB has recovered from ~34% in late 1980s to ~56% in 2005 (Wei et al., 2011). However, after comparing satellite images in 1980s and 2010, Zhao et al. (2017) showed that the total forest-occupied area has only marginally increased (i.e., 704 km² or a change percentage <1%) within the CRB. In the same period, the irrigated land and dry farmland areas, representing the agricultural practices, have decreased by 13,675 km² (a change percentage of 3%), while the residential area representing urbanization has increased by 11,237 km² (a change percentage of 46%) (Figure S2). The counteracting influences of agriculture and urbanization imply that the information on area change only is not enough to indicate the net impact without considering the spatial variability. For example, a reduction in the land area with a higher sediment yield (e.g., due to reforestation) and a similar increase in land area with a smaller sediment yield (e.g., due to urbanization and agriculture) may still cause a decrease in the net sediment yield. Except land use changes, the majority of the eroded sediment was trapped in gullies and canyons by retention dams; this reduces sediment runoff and sediment load. Reforestation and sediment retention in the regions with a high sediment yield would reduce regional sediment yield and partly explain the gradual sediment load reduction since the 1980s (Yang et al., 2006, 2011; Wang et al., 2007; Hu et al., 2009).

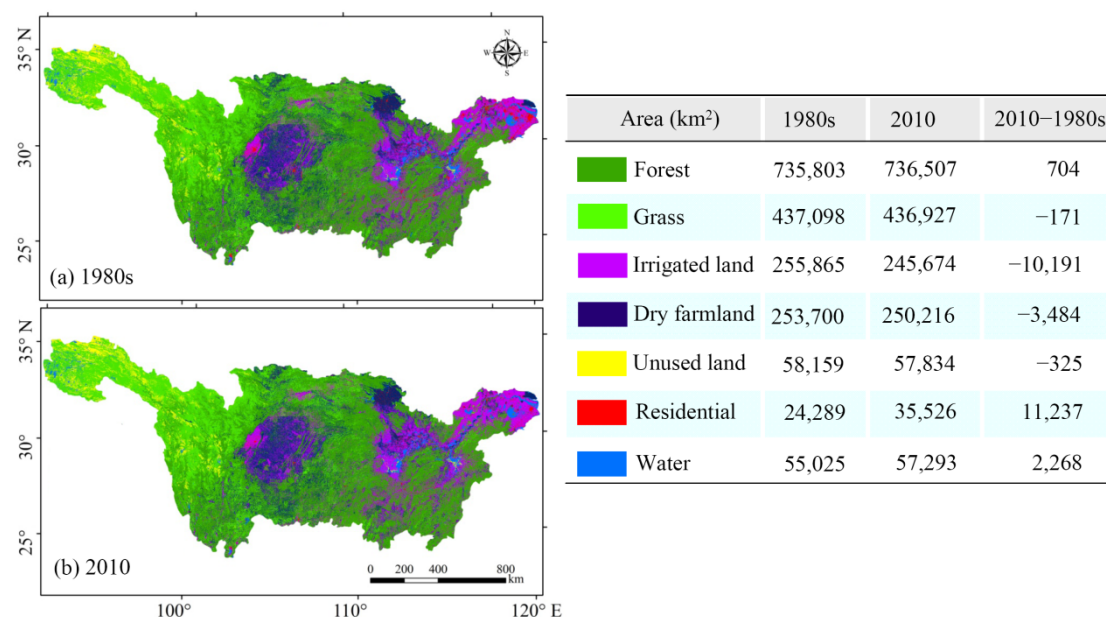


Figure S2. Satellite images showing the distribution of varying land use types in the CRB in (a) 1980s and (b) 2010, and the quantification of the area of different land usages. Image source and quantification of the land use changes can be found in Zhao et al. (2017).

Hydropower dams

Hydropower dams are another important factor regulating sediment delivery. There were 11,931 dams in the upper CRB in the late 1980s (which was 80% of the dams in the whole basin, Gu and Ian, 1989) with a total storage capacity of 20.5 billion m³ (CWRM, 2001). The number of hydropower dams increased to 52,000 with a total storage capacity of ~360 billion m³ in 2016 (Figure S3). It indicates a dramatic increase of dams in the past 20-30 years. The dams constructed in the mainstem significantly exacerbated sediment load reduction. The TGD's impacts on sediment delivery have been enormous because: (1) the TGD is located at the outlet of the mountainous upper basin where a dominant portion of sediment loads come from and it is the most downstream dam on the main river, and (2) it has a huge storage capacity (39.3 billion m³), forming a large man-made reservoir stretching ~600 km long.

A huge amount of research effort was devoted to studying sediment-related issues in the feasibility study of the TGD, including reservoir sedimentation mitigation,


downstream channel degradation and river morphological evolution, and potential impacts on the delta. It was estimated that it will take 80-100 years to fill the sediment storage reservoir of the TGD based on a representative incoming sediment flux of $509.7 \pm 104.8 \text{ Mt yr}^{-1}$ in 1961-1970. It was anticipated that 90-95% of incoming sediments would be flushed out of the dam through the sand sluicing outlets once the reservoir is filled, and then no more deposition would occur in the reservoir (CYJV, 1988). It was also estimated that the TGD would have no serious impact on the delta considering that: (1) the sediments finer than 0.01 mm would not deposit in the TGD reservoir, and (2) sediment recruitment from channel incision along the ~1,800 km long river below the TGD may restore the (fine) sediment flux to the delta (HU, 1988; Lin et al., 1989). So far, the TGD has been in operation for 14 years, since 2003, and the observations indicate that both assumptions are invalid because: (1) the incoming sediment flux to TGD has decreased rapidly since the mid-1980s and to a small quantity compared to the representative flux (Hu and Fang, 2017); (2) downstream channel degradation has occurred at a faster and larger rate than predicted, whereas the sediment flux to the delta has not restored to pre-TGD level (Hu and Fang, 2017; Guo et al., 2018); and (3) water and sediment exchanges between the mainstem and lakes in the middle CRB have been changed and the TGD's impact on the lake systems was somehow underestimated in previous studies (Yin et al., 2007).

Table S2. Statistics of the hydropower dams in the Changjiang mainstem (also see Figure S3 for their locations). *The years in the periods of construction indicate the time point of construction started, first impoundment, and construction finished. The years in bracket indicate the expected time the dam construction to be finished. #The sediment trapping efficiency is estimated based on the residence time that is referred to as the storage capacity to inflow ratio according to the Brune (1953) method.

| No. | Dam name | Distance to delta (km) | Drainage area (km ²) | Annual streamflow (km ³) | Storage capacity (km ³) | Periods of construction* | Sediment trapping efficiency# |
|-----|----------|------------------------|----------------------------------|--------------------------------------|-------------------------------------|--------------------------|-------------------------------|
| 1 | Gezhouba | 1774 | 1,005,500 | 451.0 | 1.580 | 1971-1981-1988 | 15% |
| 2 | TGD | 1810 | 1,005,000 | 450.0 | 39.300 | 1994-2003-2009 | 83% |

| | | | | | | | |
|----|------------|------|---------|-------|--------|------------------|-----|
| 3 | Xiangjiaba | 2817 | 458,800 | 146.0 | 5.163 | 2006-2012-2015 | 73% |
| 4 | Xiluodu | 2963 | 454,400 | 143.6 | 12.670 | 2005-2013-2015 | 83% |
| 5 | Baihetan | 3158 | 430,300 | 129.6 | 20.637 | 2016-(2021-2022) | 87% |
| 6 | Wudongde | 3338 | 406,000 | 116.4 | 5.863 | 2014-2018-(2020) | 78% |
| 7 | Guanyinyan | 3588 | 256,500 | 57.7 | 2.272 | 2008-2014-2016 | 75% |
| 8 | Ludila | 3683 | 247,300 | 55.2 | 1.718 | 2007-2013-2014 | 72% |
| 9 | Longkaikou | 3775 | 241,040 | 53.3 | 0.545 | 2008-2012-2014 | 50% |
| 10 | Jin'anqiao | 3815 | 237,400 | 52.7 | 0.913 | 2004-2010-2012 | 62% |
| 11 | Ahai | 3888 | 235,380 | 52.3 | 0.879 | 2007-2012-2014 | 61% |
| 12 | Liyuan | 3968 | 220,100 | 44.5 | 0.727 | 2008-2013-2014 | 60% |

122

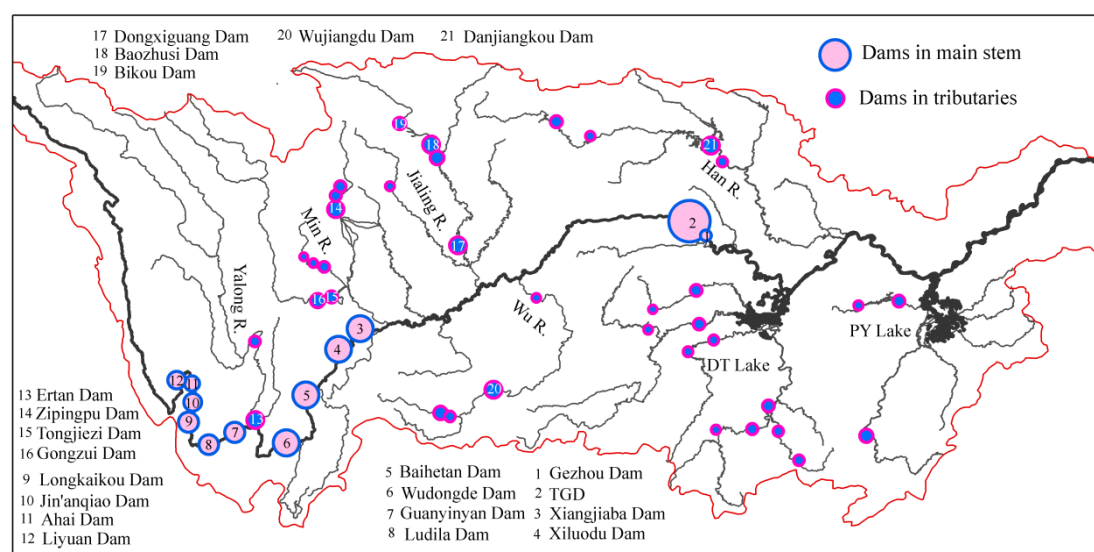

123

124 **Figure S3.** A sketch of the big hydropower dams in the tributaries and mainstem of
125 the Changjiang River. DT Lake and PY Lake stand for Dongting Lake and Poyang
126 Lake, respectively.

127

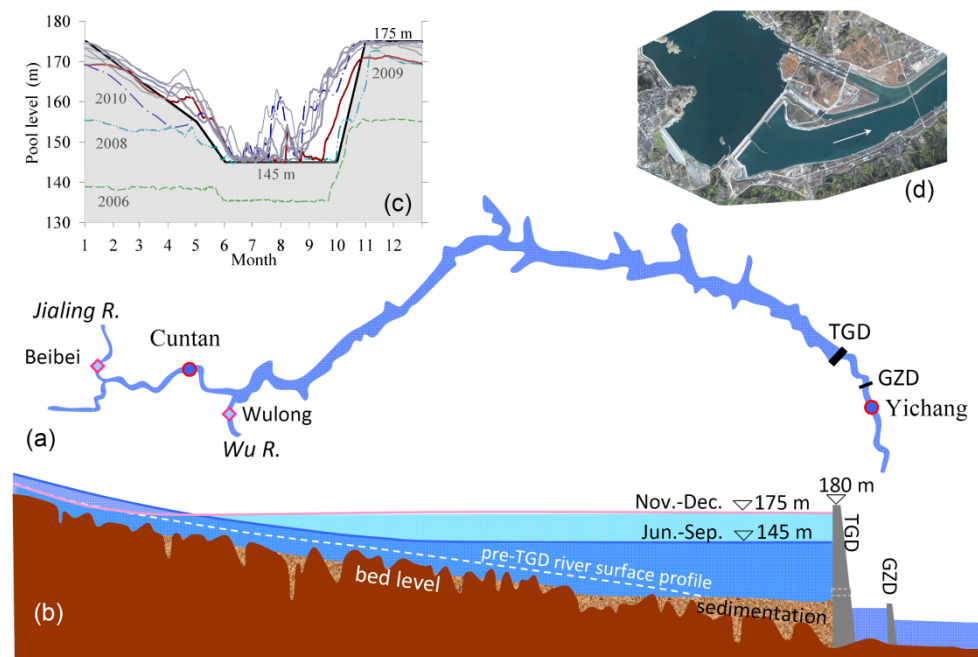


Figure S4. (a) Planform of the Three Gorges Reservoir stretching between Cuntan and the dam site, (b) sketch of the reservoir profile and the pool level, (c) variations of the pool level ahead the TGD within a year course (modified from Guo et al. (2018)), and (d) an aerial image of the TGD (image source of <https://apollomapping.com/blog/our-changing-landscape-three-gorges-dam-china>). TGD and GZD indicate Three Gorges Dam and Gezhouba Dam, respectively.

Channel degradation

Bed scour and bank erosion replenishes suspended sediment and causes downstream sediment load recovery along the middle-lower river (Figures S5 and S6; Wang et al., 2009; Hu and Fang, 2017). The sediment load recovery is confined by the availability of clay, silt and fine sands in bed sediments. The flux of fine sediment with a grain size <0.008 mm, the main content of suspended sediments, was ~ 200 Mt yr^{-1} prior to 2002 at Yichang. The quantity of fine sediment flux has reduced to <10 Mt yr^{-1} at Yichang since 2003. Downstream of Yichang, the quantity of suspended sediments with a grain size >0.125 mm has recovered to pre-TGD level at Luoshan and Hankou (Zhang et al., 2017). However, the quantity of suspended sediment <0.125 mm, once >300 Mt yr^{-1} in the river between Yichang and Datong in 1987-2002, has reduced substantially and persisted at <50 Mt yr^{-1} in the Yichang-Luoshan reach

and has only recovered slowly to $\sim 120 \text{ Mt yr}^{-1}$ at Datong (Yang et al., 2017; Zhang et al., 2017).

Channel erosion severity decreases in the downstream direction, leading to a reduction of longitudinal bed level and water surface gradients (Yang et al., 2017; Figure S5a), suggesting reduced hydraulic erosion power. The bed sediment below TGD has coarsened significantly in the recent decade, particularly within the river $\sim 120 \text{ km}$ downstream of TGD. For instance, the bed sediments at Yichang have changed from coarse sands ($\sim \text{mm}$) before 2003 to gravels and pebbles ($\sim \text{cm}$) in recent years (Luo et al., 2012; Lai et al., 2017; Han et al., 2017; Zhang et al., 2017). Along-river bed level gradient adjustment and bed textural changes are two constraints on the time scale of fluvial morphological adaptation. So far the river bed textural changes occur at a faster rate than the bed slope adjustment. It suggests that bed texture will become the prime constraint on the time scale of sediment load recovery and river morphodynamic restoration.

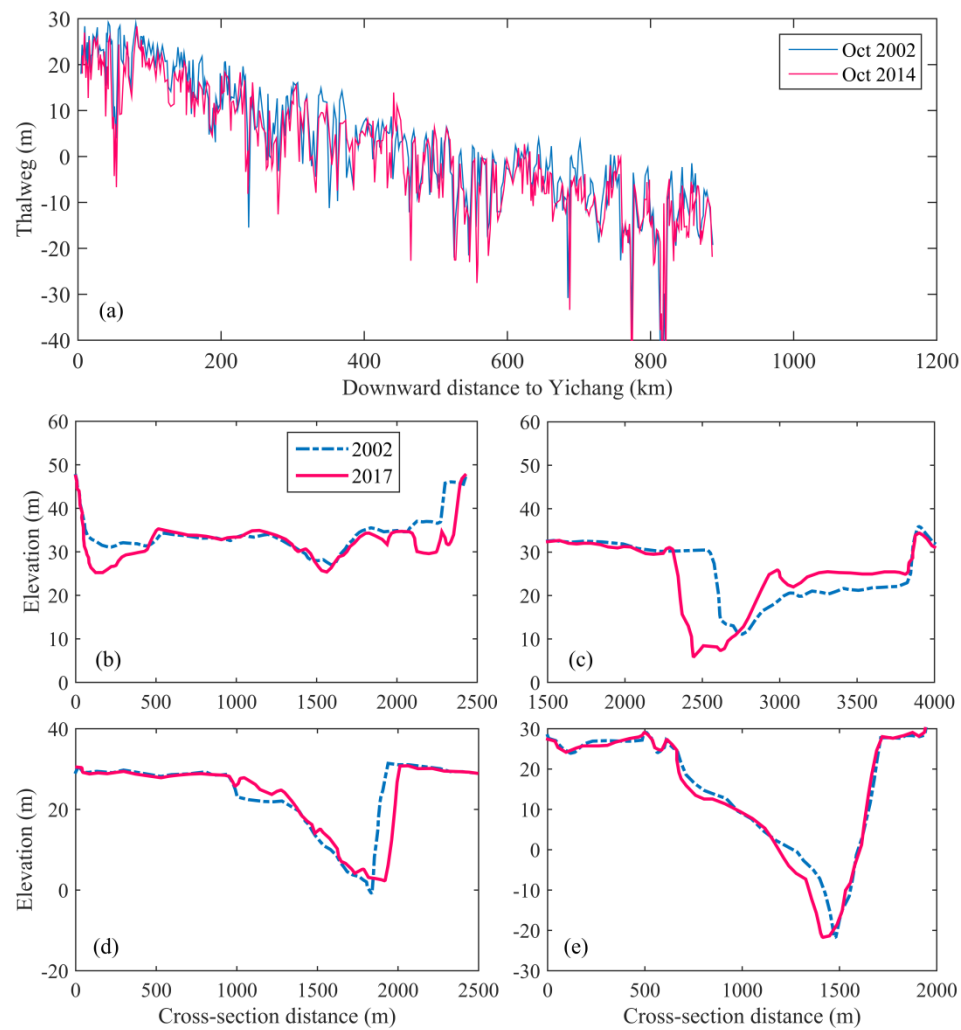


Figure S5. (a) Along-river thalweg changes in the river below-TGD. (b)-(e) cross-section profile changes at river sections 120 km, 380 km, 520 km, and 600 km downstream of TGD, respectively. Data in (a) are from Yang et al. (2017), and the other data are from CWRC (2018).

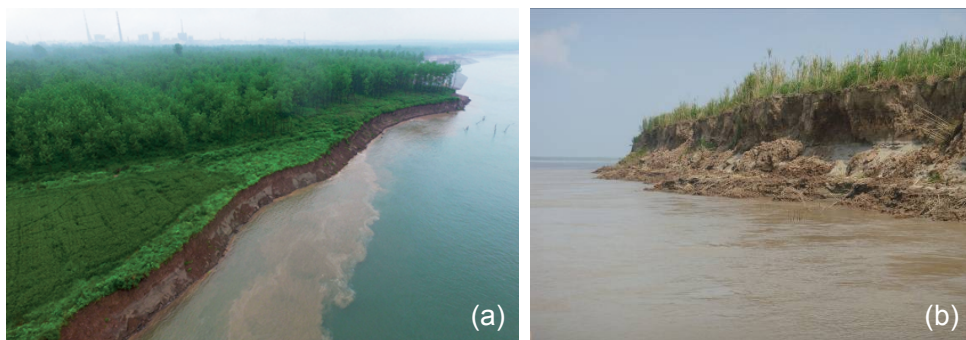


Figure S6. Images showing bank erosion and collapse (a) around Shashi and (b) around Jianli along the middle-lower main river.

Sand mining

The quantity of sand mining was approximately 40 Mt yr⁻¹ in the early 1980s and increased to ~80 Mt yr⁻¹ in the late 1990s along the main river (Yang et al., 2004; Chu et al., 2009). Sand mining in the mainstem has been regulated since 2001 and has also been relocated to the tributaries and lakes. Zhao and Zhou (2006) reported that approximately annually 73.1 million m³ of sand was extracted from the mainstem in 2002-2007. Wang et al. (2007) estimated that sand mining removed some 110 Mt yr⁻¹ and about >70% of that occurs in the middle-lower river. Government bulletins indicate that sand mining will be limited to 83.3 Mt yr⁻¹ in 2016-2020 along the middle-lower river. Collectively, these studies are consistent and indicate that the quantity of sand mining is substantial. Other than the reported and regulated sand mining, undocumented sand mining activities may also be substantial because of the big market for sands as construction material.

It is notable that the short- and long-term effects of sand mining on sediment loads are contrasting. Ongoing sand mining activities disturb the river bed and stimulate more suspended sediment transport, leading to larger sediment loads in the short term. For example, sand mining has removed 31.9 Mt of sediment from the Poyang Lake in 2017 (CWRM, 2018), and such intensive sand mining caused a larger sediment flux at Hukou in the most recent decade. In addition, sand mining induces river bed degradation (Figure S7). This will lead to a reduction in suspended sediment flux in the long term as sand mining stops (Chu et al., 2009; Lai et al., 2014).

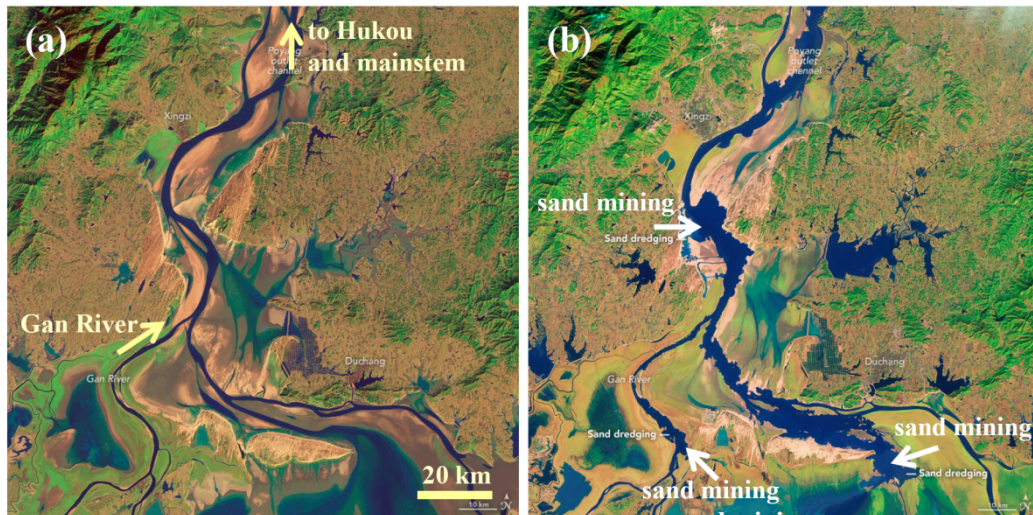


Figure S7. Satellite images of the Poyang Lake on (a) 7 Dec. 1995 and (b) 24 Dec. 2013 showing the influences of intensive sand mining (image source of <https://earthobservatory.nasa.gov/IOTD/view.php?id=87663#>)

S6. Additional supporting figures

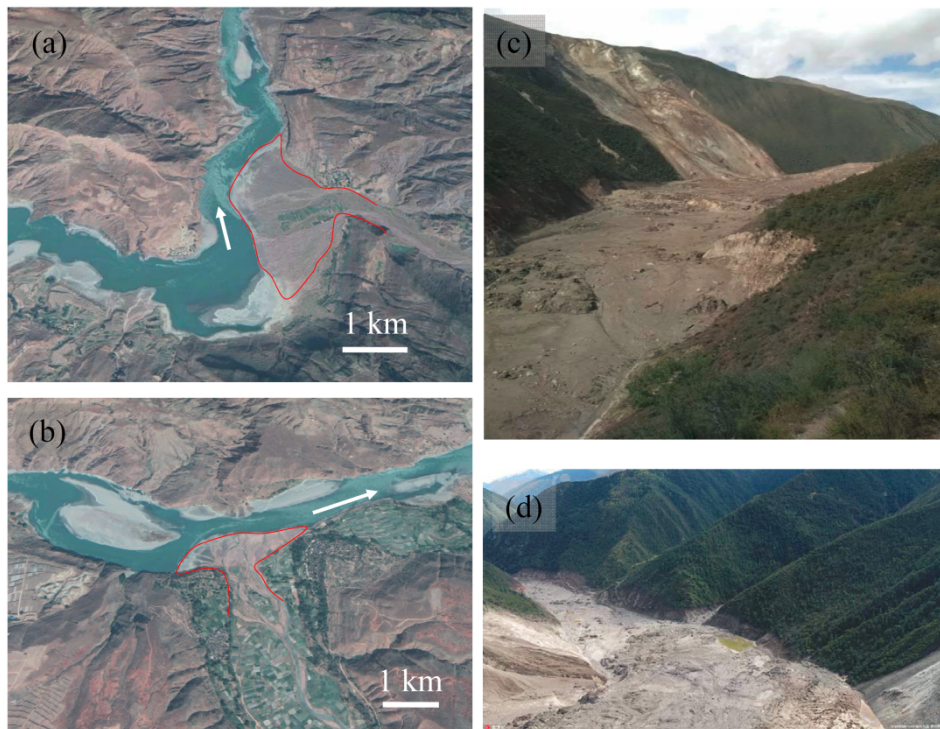


Figure S8. (a) and (b) satellite mages of alluvial fans and associated deposits along the Jinsha River in the upper basin, and (c) and (d) images of the landslides occurred in the Jinsha river in Nov. 2018. The satellite images in (a) and (b) are from @Google Earth. The arrows indicate the downstream river direction.

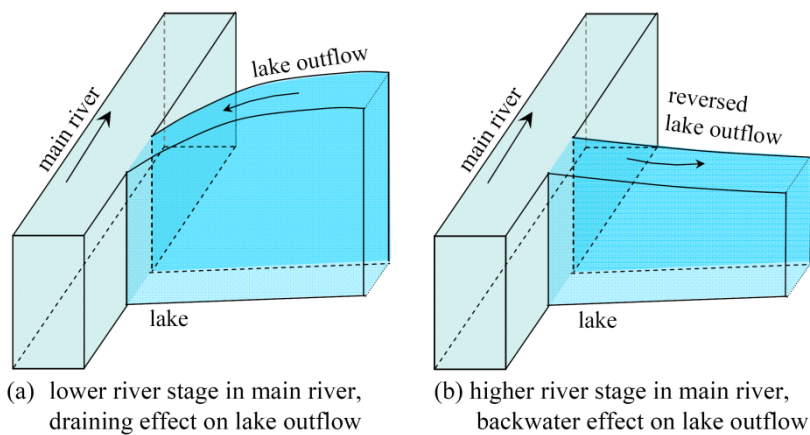


Figure S9. River-lake interactions with respect to (a) draining effects and (b) backwater effects on lake outflows. Modified from Zhang et al. (2016).

References in this supplement

- Brune G.M., 1953. Trap efficiency of reservoirs. Transactions of the American Geophysical Union 34, 407–418.
- Chen J., Finlayson B.L., Wei T.Y., Sun Q.L., Webber M., Li M.T., Chen Z.Y., 2016. Changes in monthly flows in the Yangtze River, China- with special reference to the Three Gorges Dam. Journal of Hydrology 536, 293–301.
- Chen Y., Zhang S., Huang D., Li B.-L., Liu J., Liu W., Ma J., Wang F., Wang Y., Wu S., Wu Y., Yan J., Guo C., Xin W., Wang H., 2017. The development of China's Yangtze River Economic Belt: how to make it in a green way? Science Bulletin 62(9), 648–651.
- China Water Resources Ministry (CWRM) (ed.). 2001-2018. River sediment bulletin of China. Water Publication Press, Beijing, China, pp.1–17.
- CIPM Yangtze Joint Venture (CYJV), 1988. Three Gorges Water Control Project Feasibility Study, People's Republic of China, vol. 5, Sediment, pp. 214.
- Chu Z.X., Zhai S.K., Lu X.X., Liu J.P., Xu J.X., Xu K.H., 2009. A quantitative assessment of human impacts on decrease in sediment flux from major Chinese rivers entering the western Pacific Ocean. Geophysical Research Letters 36, L19603, doi:10.1029/2009GL039513.

- Gu H.Y., Ian D., 1989. Spatial and temporal dynamics of land degradation and fluvial erosion in the middle and upper Yangtze River basin, China. *Land Degradation & Rehabilitation* 1, 217–235.
- Guo L.C., Su N., He Q., Zhu C.Y., 2018. How have the river discharges and sediment loads changed in the Changjiang River basin downstream of the Three Gorges Dam? *Journal of Hydrology* 560, 259–274.
- Guo T.F. (ed.), 2015. Water and sediment conservation in the Changjiang River basin. Changjiang Press, Wuhan, China.
- Han J.Q., Sun Z.H., Li Y.T., Yang Y.P., 2017. Combined effects multiple large-scale hydraulic engineering on water stages in the middle Yangtze River. *Geomorphology* 298, 31–40.
- Hohai University (HU), 1988. Preliminary analysis of impacts of the TGP on saline intrusion, navigation channel and tidal flats in the estuary. CRRSP, pp. 745-761.
- Hu B.Q., Yang Z.S., Wang H.J., Sun X.X., Bi N.S., Li G.G., 2009. Sedimentation in the Three Gorges Dam and the future trend of Changjiang (Yangtze River) sediment flux to the sea. *Hydrology and Earth System Science* 13, 2253–2264.
- Hu C.H., Fang C.M., 2017. Research on sediment problem solutions for the Three Gorges Projection and its operational effects. *Scientia Sinica Technologica* 47(8), 832–844. (in Chinese with an abstract in English)
- Lai X.H., Yin D.W., Finlaysoon B.L., Wei T.Y., Li M.T., Yuan W.H., Yang S.L., Dai Z.J., Gao S., Chen Z.Y., 2017. Will river erosion below the Three Gorges Dam stop in the middle Yangtze? *Journal of Hydrology* 554, 24–31.
- Lin B.N., Dou G.R., Xie J.H., Dai D.Z., Chen J.S., Tang R.C., Zhang R., 1989. On some key sedimentation problems of Three Gorges Project (TGP). *International Journal of Sediment Research* 4(1), 57–74.
- Luo X.X., Yang S.L., Zhang J., 2012. The impact of the Three Gorges Dam on the downstream distribution and texture of sediments along the middle and lower Yangtze River and its estuary, and subsequent sediment dispersal in the East China Sea. *Geomorphology* 179, 126–140.
- Sang Y.F., Wang Z., Liu C., 2012. Spatial and temporal variability of daily temperature

during 1961-2010 in the Yangtze River Basin, China. *Quaternary International* 304, 33–42.

Wang J., Bai S.B., Liu P., Li Y.Y., Gao Z.R., Qu G.X., Cao G.J., 2009. Channel sedimentation and erosion of the Jiangsu reach of the Yangtze River during the last 44 years. *Earth Surface Processes and Landforms* 34, 1587–1593.

Wang W.G., Xing W.Q., Yang T., Shao Q.X., Peng S.Z., Yu Z.B., Yong B., 2012. Characterizing the changing behaviors of precipitation concentration in the Yangtze River Basin, China. *Hydrological Processes* 27(24), 3375–3393.

Wang Z.Y., Li Y.T., He P.Y., 2007. Sediment budget of the Yangtze River. *Water Resources Research* 43, W04401, doi:10.1029/2006WR005012.

Wei J., He X.B., Bao Y.H., 2011. Anthropogenic impacts on suspended sediment load in the Upper Yangtze River. *Regional Environmental Change* 11, 857–868.

Yang H.F., Yang S.L., Xu K.H., Milliman J.D., Wang H.J., Yang Z.S., Chen Z.Y., Zhang C.Y., 2018. Human impacts on sediment in the Yangtze River: a review and new perspectives. *Global and Planetary Change* 162, 8–17.

Yang S.L., Gao A., Hotz H.M., Zhu J., Dai S.B., Li M., 2005. Trends in annual discharge from the Yangtze River to the sea (1865-2004). *Hydrological Science* 50, 825–836.

Yang S.L., Milliman J.D., Li P., Xu K., 2011. 50000 dams later: erosion of the Yangtze River and its delta. *Global Planetary Change* 75, 14–20.

Yang S.L., Shi Z., Zhao H.Y., Li P., Dai S.B., Gao A., 2004. Effects of human activities on the Yangtze River suspended sediment flux into the estuary in the last century. *Hydrology and Earth System Sciences* 8(6), 1210–1216.

Yang Y.P., Zhang M.J., Zhu L.L., Liu W.L., Han J.Q., Yang Y.H., 2017. Influence of large reservoir operation on water-levels and flows in reaches below dam: case study of the Three Gorges Reservoir. *Scientific Reports* 7, 15640, doi:10.1038/s41598-017-15677-y.

Yang Z.S., Wang H.J., Saito Y., Milliman J.D., Xu K.H., Qiao S., Shi G., 2006. Dam impacts on the Changjiang (Yangtze) River sediment discharge to the sea: the past 55 years and after the Three Gorges Dam. *Water Resources Research* 42, W04407,

287 doi:10.1029/2005WR003970.

288 Yin H.F., Liu G.R., Pi J.G., Chen G.J., Li C.G., 2007. On the river-lake relationship of
 289 the middle Yangtze reaches. *Geomorphology* 85 197–207.

290 Zhang Q., Peng J.T., Xu C.Y., Singh V.P., 2014. Spatiotemporal variations of
 291 precipitation regimes across the Yangtze River Basin, China. *Theoretical and*
 292 *Applied Climatology* 115, 703–712.

293 Zhang X., Dong Z.C., Gupta H., Wu G.D., Li D.Y., 2016. Impact of the Three Gorges
 294 Dam on the hydrology and ecology of the Yangtze River. *Water* 8(12), 590,
 295 doi:10.3390/w8120590.

296 Zhang W., Yang Y.P., Zhang M.J., Li Y.T., Zhu L.L., You X.Y., Wang D., Xu J.F., 2017.
 297 Mechanisms of suspended sediment restoration and bed level compensation in
 298 downstream reaches of the Three Gorges Project (TGP). *Journal of Graphical*
 299 *Science* 27(4), 463–480.

300 Zhao Y., Zhou J.S., 2006. Several issues on sand excavation planning modification in
 301 mainstream channels of the middle and lower reaches of the Changjiang, China.
 302 *Water Resources* 6, 34–35. (in Chinese)

303 Zhao Y.F., Zou X.Q., Liu Q., Yao Y.L., Li Y.L., Wu X.W., Wang C.L., Yu W.W., Wang,
 304 T., 2017. Assessing natural and anthropogenic influences on water discharge and
 305 sediment load in the Yangtze River, China. *Sciences of the Total Environment* 607–
 306 608, 920–932.