

A wall-resolved large-eddy simulation of deep cavity flow in acoustic resonance

You Wei Ho[†] and Jae Wook Kim

Institute of Sound & Vibration Research, University of Southampton
Southampton, SO17 1BJ, United Kingdom

(Received xx; revised xx; accepted xx)

The aeroacoustic source mechanism of a deep rectangular cavity with an aspect ratio of $D/L = 2.632$ subjected to a turbulent boundary layer of $\theta/L = 0.0345$ at a Mach number of 0.2 is investigated by using a high-order accurate large-eddy simulation. The primary aim of this study is to provide an improved understanding of the fluid-acoustic coupling mechanism that triggers a self-sustained acoustic resonance in a deep cavity. Various analysis methods, including Doak's momentum potential theory that allows for separating hydrodynamic and acoustic components, are used to provide highly detailed investigations and findings. One of the main investigations is given to the vortex dynamics near the cavity opening region as the primary source of noise generation. In addition, the noise generation mechanism is quantitatively explained by the onset of the separation region near the downstream corner ensued from the synchronised shear layer-wall interaction. The current work extensively focuses on the fluid-acoustic coupling mechanism, and it is found that the acoustic resonance favourably modulates the hydrodynamic fluctuation near the upstream corner of the cavity. Furthermore, the current study also suggests that nonlinear interactions between fundamental acoustic resonance and higher harmonics are plausible. Based on the discussions provided in this paper, a semi-empirical model to predict the critical freestream velocity at which a strong fluid-acoustic coupling occurs as a function of cavity geometry and inflow boundary-layer property is proposed.

1. Introduction

Deep cavity oscillations are often found in many engineering applications such as safety valves (Coffman & Bernstein 1980; Galbally *et al.* 2015), closed side-branches in gas transport system (Bruggeman *et al.* 1989; Ziada 2010), turbo-machineries (Ziada *et al.* 2002; Aleksentsev *et al.* 2016) and in riverine environments (Perrot-Minot *et al.* 2020). Under certain flow conditions, the presence of airflow over a deep cavity can excite self-sustained oscillation which couples with an acoustic mode to generate intense aerodynamic noises. Therefore, the necessity of minimising such acoustical problems arising from deep cavity oscillations deserves special attention.

The aerodynamic noise radiation by cavities due to the presence of the incoming grazing flow has been studied by numerous researchers in the past. Early experimental evidence provided by Karamcheti (1955); Heller *et al.* (1971); Bilanin & Covert (1973); Tracy (1997); Ashcroft & Zhang (2005); Thangamani *et al.* (2012); Wagner *et al.* (2017) have indicated that shallow cavities in high-speed grazing flow emit intense acoustic radiation which composed of distinct evenly spaced frequencies. The common cavity oscillation involves the self-sustained oscillation ensued from the feedback mechanism

[†] Email address for correspondence: ywh1g14@soton.ac.uk

of Rossiter (1964): where Kelvin-Helmholtz disturbances are amplified in the free shear layer, and the impingement of disturbances on the downstream corner produces acoustic waves which propagate upstream to excite further instabilities in the shear layer to close the feedback loop. However, for deeper cavities with larger aspect ratios (e.g. $D/L \gg 1$), the feedback process involves the mutual interaction of the shear layer oscillation and a depthwise acoustic mode of the cavity (Elder 1978; Ziada & Bühlmann 1992), which generates aerodynamic noise of minimum damping (Tam 1976; Koch 2005). Consequently, the acoustic reinforcement near the upstream corner amplifies the flow instabilities into coherent vortices. The interaction of the latter with the downstream corner of the cavity translates into unsteady structural loadings and undesirable aerodynamic noises.

Plumlee *et al.* (1962) are one of the first authors who investigated acoustic radiation by deep cavities. They observed the maximum acoustic responses of deep cavities occurred at frequencies close to the depthwise acoustic modes as confirmed by East (1966) and Koch (2005). In general, cavity oscillations that involve the interplay between the shear layer oscillation and acoustic resonance are referred to as fluid-resonant oscillations according to Rockwell & Naudascher (1978). In this oscillation regime, the flow behaviour and the speculated mechanism that enables the self-sustained oscillation differ from the conventional Rossiter's feedback model. It is suggested that the resonant acoustic mode is the primary component that provides the upstream feedback which strongly reinforced the shear layer oscillation (Tam & Block 1978; Tonon *et al.* 2011; Ziada & Lafon 2014).

According to Bruggeman (1987), the acoustic response from a flow-induced oscillation in closed side-branches depends strongly on the ratio of the acoustic particle velocity associated with the depthwise standing-wave to the mean flow velocity and can be separated into three main categories: low; moderate; and high acoustic pulsation with each level describes an increase in the influence of the acoustic resonance on the receptivity of the separated shear layer near the upstream corner. The level of pulsation is expressed by the ratio of $|u_a|/U_b$, where $|u_a|$ is the amplitude of the acoustic particle velocity at the cavity opening and U_b is the centerline velocity in the main channel. At low pulsation levels (e.g. $|u_a|/U_b \leq O(10^{-3})$), the acoustic perturbation is insufficient to trigger the formation of coherent vortices from the separated shear layer near the upstream corner. Consequently, the streamwise growth of the hydrodynamic perturbation in the shear layer is described by the linearised theory of an inviscid quasi-parallel free shear layer (Michalke 1972). At higher pulsation levels (e.g. $|u_a|/U_b \geq O(10^{-3})$), the shear layer roll-up into discrete vortices and the amplitude of oscillations is determined by the nonlinearities (Peters 1993). Accordingly, Bruggeman *et al.* (1989) suggested an alternative feedback mechanism for the fluid-resonant oscillation based on Vortex Sound Theory (Howe 2003). This mechanism can be expressed by the following process: acoustic forcing from the resonance on the shear layer at the upstream corner; formation of coherent vortices by the instabilities in the separated shear layer; transfer of energy from the local flow to the acoustic field by the interaction of convective vorticity and the acoustic resonance; the net energy transfer to acoustic field determines the amplitude and the phase of the feedback at the upstream corner. Based on this concept, the acoustic resonance in the deep cavity plays an important role in destabilising the shear layer and reinforcing the vortex coalescences. Therefore, this alternative feedback mechanism based on the energy transfer between the vortical (hydrodynamic) and potential (acoustic) fields offers an attractive explanation for the "lock-on" effect as observed in deep cavity experiments (East 1966; Yang *et al.* 2009).

The present paper aims to provide an extended understanding of the feedback mechanism that reinforces the self-sustained oscillation in a deep cavity, with a particular interest in the modulation process of the shear layer oscillation and the vortex dynamics

in the presence of acoustic resonance. Therefore, a central hypothesis of the present paper is that the Rossiter modes provide the primary sound source, which can be further amplified by the spatially coherent acoustic field from the acoustic resonance (Tam & Block 1978; Gutmark & Ho 1983). Accordingly, a high-fidelity numerical simulation is performed, from which the time history of the hydrodynamic and acoustic fields are accurately captured around the deep cavity to facilitate the investigations.

This paper is structured and written in the following order. Section 2 introduces the computational set-up and methods used in this study. In Section 3, the acoustic and hydrodynamic fields around the cavity region are investigated in detail. Section 4 moves the focus to the proposition of a modified Rossiter formula to consider the fluid-acoustic coupling mechanism of the deep cavity in acoustic resonance. Finally, concluding remarks are provided in Section 5.

2. Description of problem and the computational set-up

A cavity section with a length of $L/h = 0.608$ and depth of $D/h = 1.6$ enclosed in a channel with a height of $2h$ is considered in the present study. The Reynolds number based on the cavity opening length, $L = 0.038$ m is set to $Re_\infty = 174,594$ and a freestream Mach number of $M_\infty = 0.2$ based on the ambient speed of sound (for air) of $a_\infty = 340.2$ m/s and the reference temperature of $T_\infty = 288$ K are considered in this work. The current numerical investigation employs a high-resolution implicit large-eddy simulation (ILES) method based on a wavenumber-optimised discrete filter (Kim 2010). The filter is applied directly to the solution (conservative variables) at every time step. It acts as an implicit sub-grid scale (SGS) model that enforces dissipation of scales smaller than the filter cut-off wavelength. Garmann *et al.* (2012) performed an extensive analysis of the ILES technique compared to the traditional implementation of an explicit SGS model and concluded that, ILES simulations are capable of correctly capturing the flow physics when the grid is subjected to an appropriate resolution.

2.1. Governing equations and numerical methods

In this work, the full 3-D compressible Navier-Stokes equations (with a source term for sponge layers included) are used, which can be expressed in a conservative form, transformed onto a generalised coordinate system as

$$\frac{\partial}{\partial t} \left(\frac{\mathbf{Q}}{J} \right) + \frac{\partial}{\partial \xi_i} \left(\frac{\mathbf{E}_j - Re_\infty^{-1} M_\infty \mathbf{F}_j}{J} \frac{\partial \xi_i}{\partial x_j} \right) = -\frac{a_\infty}{L} \frac{\mathbf{S}}{J}, \quad (2.1)$$

where the indices $i = 1, 2, 3$ and $j = 1, 2, 3$ denote the three dimensions. The vectors of the conservative variables, inviscid and viscous fluxes are given by

$$\left. \begin{aligned} \mathbf{Q} &= [\rho, \rho u, \rho v, \rho w, \rho e_t]^T, \\ \mathbf{E}_j &= [\rho u_j, (\rho u u_j + \delta_{1j} p), (\rho v u_j + \delta_{2j} p), (\rho w u_j + \delta_{3j} p), (\rho e_t + p) u_j]^T, \\ \mathbf{F}_j &= [0, \tau_{1j}, \tau_{2j}, \tau_{3j}, u_i \tau_{ji} + q_j]^T, \end{aligned} \right\} \quad (2.2)$$

with the stress tensor and heat flux vector written as

$$\tau_{ij} = \mu \left(\frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} - \frac{2}{3} \delta_{ij} \frac{\partial u_i}{\partial x_i} \right), \quad q_j = \frac{\mu}{(\gamma - 1) Pr} \frac{\partial T}{\partial x_j}, \quad (2.3)$$

where $\xi_i = \{\xi, \eta, \zeta\}$ are the generalised coordinates, $x_j = \{x, y, z\}$ are the Cartesian coordinates, δ_{ij} is the Kronecker delta, $u_j = \{u, v, w\}$, $e_t = p/[(\gamma - 1)\rho] + u_j u_j/2$ and $\gamma = 1.4$ for air. The local dynamic viscosity μ is calculated by using Sutherland's

law (White 1991). In the current set-up, ξ , η and ζ are aligned in the streamwise, vertical and spanwise directions, respectively. The Jacobian determinant of the coordinate transformation (from Cartesian to the generalised) is given by $J^{-1} = |\partial(x, y, z)/\partial(\xi, \eta, \zeta)|$ (Kim & Morris 2002). The extra source term \mathbf{S} on the right-hand side of (2.1) is non-zero within the sponge layer only, which is described in Kim *et al.* (2010*a,b*). In this paper, the freestream Mach and Reynolds numbers are defined as $M_\infty = U_\infty/a_\infty$ and $Re_\infty = \rho_\infty U_\infty L/\mu_\infty$ where $a_\infty = \sqrt{\gamma p_\infty/\rho_\infty}$ is the ambient speed of sound and $U_\infty = \sqrt{u_\infty^2 + v_\infty^2 + w_\infty^2}$ is the speed of the freestream mean flow. The governing equations are non-dimensionalised based on the streamwise cavity opening length $L = 38$ mm for length scales, the ambient speed of sound a_∞ for velocities, L/a_∞ for time scales and $\rho_\infty a_\infty^2$ for pressure, unless otherwise notified. Temperature, density and dynamic viscosity are normalised by their respective ambient values: T_∞ , ρ_∞ and μ_∞ .

The governing equations given above are solved using high-order accurate numerical methods specifically developed for aeroacoustic simulation on structured grids. The flux derivatives in space are calculated based on fourth-order pentadiagonal compact finite difference schemes with seven-point stencils Kim (2007). Explicit time advancing of the numerical solution is carried out using the classical fourth-order Runge-Kutta scheme with the CFL number of 0.95. Numerical stability is maintained by implementing sixth-order pentadiagonal compact filters for which the cutoff wavenumber (normalised by the grid spacing) is set to 0.85π . In addition to the sponge layers used, characteristics-based non-reflecting boundary conditions based on Kim & Lee (2000) are applied at the inflow and outflow boundaries to prevent any outgoing waves from returning to the computational domain. Periodic conditions are used across the spanwise boundary planes unless otherwise stated. Slip (no penetration) and no-slip wall boundary conditions based on Kim & Lee (2004) are applied at the top and bottom channel walls, respectively.

The computation is parallelised via domain decomposition and message passing interface (MPI) approaches. The compact finite difference schemes and filters used are implicit in space due to the inversion of pentadiagonal matrices involved, which requires a precise and efficient technique for the parallelisation to avoid numerical artefacts that may appear at the subdomain boundaries. A recent parallelisation approach based on quasi-disjoint matrix systems (Kim 2013) offering super-linear scalability is used in the present paper.

2.2. Simulation set-up and discretisation of the problem

The cavity geometry and the computational domain used in this work are shown in figure 1. The domain of investigation comprises of $x/L \in [-1.64, 4.93]$ in the streamwise direction, $y/L \in [-2.63, 3.29]$ in the vertical direction and $z/L \in [0, 0.822]$ in the spanwise direction. The entire computational domain; the inner region (physical domain) where meaningful simulation data are obtained; and, the sponge layer zone are defined as

$$\left. \begin{aligned} \mathcal{D}_\infty &= \{ \mathbf{x} \mid x/L \in [-1.644, 4.934], y/L \in [-2.632, 3.289], z/L \in [0, 0.822] \}, \\ \mathcal{D}_{\text{physical}} &= \{ \mathbf{x} \mid x/L \in [-1.644, 3.289], y/L \in [-2.632, 3.289], z/L \in [0, 0.822] \}, \\ \mathcal{D}_{\text{sponge}} &= \mathcal{D}_\infty - \mathcal{D}_{\text{physical}}. \end{aligned} \right\} \quad (2.4)$$

The physical domain, \mathcal{D}_∞ consists of a deep cavity with an aspect ratio of $D/L = 2.632$ enclosed in a straight rectangular channel with a channel half-height of $h/L = 1.644$. The channel region is discretised by a total of $720 \times 270 \times 180$ grid points in the streamwise, vertical and spanwise directions, respectively. A total of $180 \times 180 \times 180$ grid points are used in the streamwise, vertical and spanwise directions, respectively, in the cavity region. The mesh in wall-normal direction is refined close to the viscous wall $y^+ \approx 1$ to

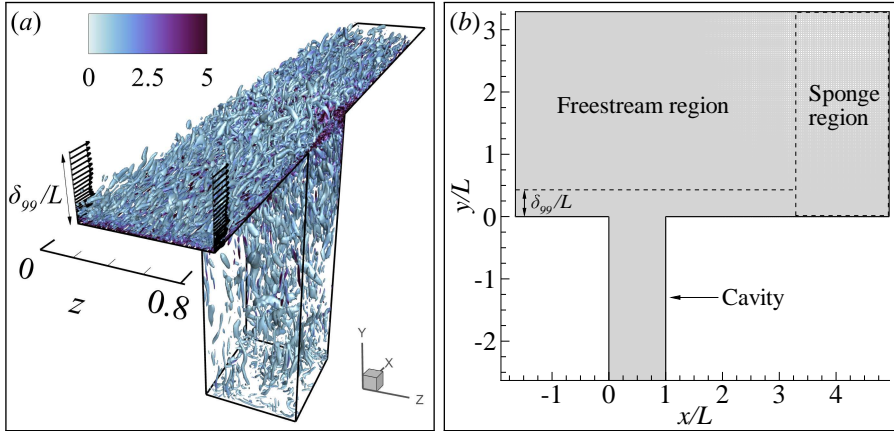


FIGURE 1. Visualisations of the current computational domain of the deep cavity configuration enclosed in a channel. Plotted here are: (a) the instantaneous non-dimensional Q -criterion iso-surfaces ($Q = 0.15$) coloured by the non-dimensional vorticity magnitude ($|\omega_i|$), showing the three-dimensional vortices in the turbulent boundary layer; and, (b) a spanwise view of the computational domain used in the current numerical investigation.

ensure a sufficiently high level of near-wall grid resolution is maintained throughout the viscous wall surfaces.

The inlet is located at $x/L = -1.664$ upstream of the cavity where the turbulent inflow data is injected. The outflow boundary is placed at a relatively remote location downstream from the cavity, allowing a sufficient distance for the vortices to dissipate. In the current study, a precursor simulation is employed to generate the prerequisite turbulent inflow data for the cavity simulation. The precursor simulation domain size ($L_x \times L_y \times L_z$) was set to $4\delta_{99} \times 1\delta_{99} \times 2\delta_{99}$ with $360 \times 120 \times 180$ grid points in the streamwise, vertical and spanwise directions, respectively. The initial boundary layer thickness, δ_{99} is determined analytically based on Na & Lu (1973), and the channel flow is initialised with the turbulent mean flow profile according to Spalding (1961). Periodic boundary conditions are applied in streamwise and spanwise direction and an implicit pressure gradient to maintain the desired mass flow rate is applied. The precursor simulation is completed when the mean flow profile is converged and the obtained instantaneous flow solutions are injected into the cavity simulation through the inlet plane. Figure 2 shows a close agreement of the time-averaged turbulent velocity profile and the Reynolds stresses between the current half-channel LES and a full-channel DNS results from Lee & Moser (2015), conducted at $Re_\tau \approx 2600$ and 2000, respectively. The frequency spectra of the incoming turbulence are shown in figure 3 and the inflow boundary layer information for the current simulation is listed in Table 1.

Re_∞	M_∞	δ_{99}/L	δ^*/L	θ/L	H
174,594	0.2	0.429	0.0431	0.0345	1.25

TABLE 1. Boundary layer parameters used as the inflow condition of the current cavity simulation.

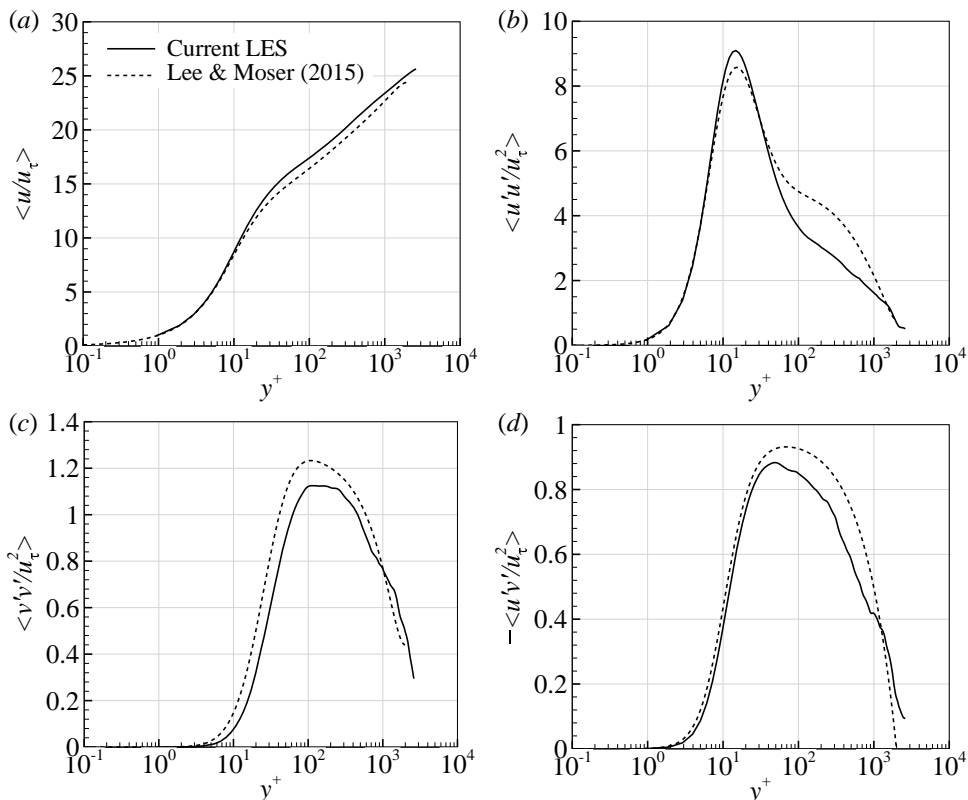


FIGURE 2. (a) Time-averaged turbulent boundary layer profile; and, (b, c, d) Reynolds stresses obtained from the current precursor half-channel LES ($Re_\tau \approx 2600$) compared to the full-channel DNS ($Re_\tau \approx 2000$) by Lee & Moser (2015).

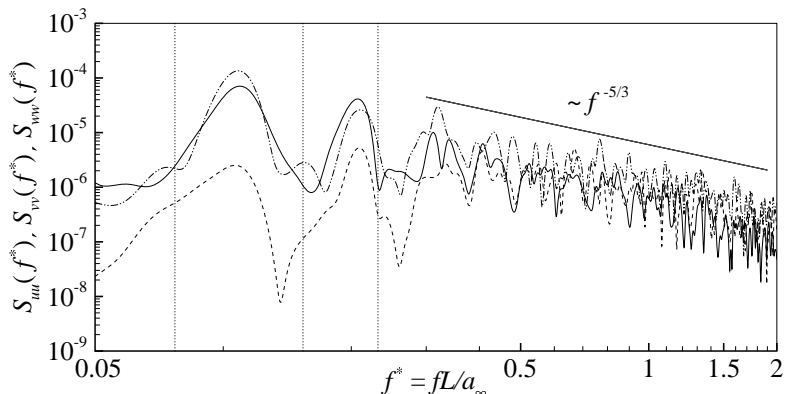


FIGURE 3. The PSD of the streamwise velocity fluctuation, u' (—); vertical velocity fluctuation, v' (---); and, spanwise velocity fluctuation, w' (-·-·-), of the precursor simulation measured on the outlet plane in the log-law region (e.g. $y^+ = 500$), superimposed with the tonal frequencies (·····) observed from figure 5(b).

2.3. Definition of variables for statistical analysis

Data processing and analysis are carried out upon the completion of the simulation. The main property required in this study is the power spectral density (PSD) function of the pressure fluctuation around the cavity. To facilitate the following discussions, the pressure fluctuation is defined here as:

$$p'(\mathbf{x}, t) = p(\mathbf{x}, t) - \bar{p}(\mathbf{x}), \quad (2.5)$$

where $\bar{p}(\mathbf{x})$ is the time-averaged pressure field. Following the definitions used in Goldstein (1976), the PSD functions of the pressure fluctuations (based on frequency and one-sided) are then calculated by:

$$S_{pp}(\mathbf{x}, f) = \lim_{T \rightarrow \infty} \frac{P(\mathbf{x}, f, T)P^*(\mathbf{x}, f, T)}{T}, \quad (2.6)$$

where P is an approximate Fourier transform of p , respectively, based on the following definition:

$$P(\mathbf{x}, f, T) = \int_{-T}^T p'(\mathbf{x}, t)e^{-2\pi ift} dt, \quad (2.7)$$

and, ‘*’ denotes a complex conjugate. Similarly, the magnitude and the respective phase of the single-sided Fourier transform pressure field are calculated by

$$|P(\mathbf{x}, f, T)| = 2\sqrt{P(\mathbf{x}, f, T)P^*(\mathbf{x}, f, T)}, \quad (2.8)$$

$$\Phi_p(\mathbf{x}, f, T) = \arctan \left\{ \frac{\text{Im}[P(\mathbf{x}, f, T)]}{\text{Re}[P(\mathbf{x}, f, T)]} \right\}. \quad (2.9)$$

In the above equations, T represents the half-length of the time signals used for the approximate Fourier transform. The same procedures are also performed on the velocity field later in this paper.

3. Results and discussion

The self-sustained oscillation in deep cavities is often described as a fluid-resonant oscillation in which the shear layer oscillation couples with a depthwise acoustic mode of the cavity. When this happens, a distinct large-scale vortical structure will be reinforced by the acoustic resonance, and its interaction with the downstream corner promotes a maximum conversion of local flow energy into acoustic energy. This process is captured in the current computational results. The iso-contour of the pressure fluctuation illustrated in figure 4(a) shows a low-pressure region caused by the concentrated vorticity (not shown) near the cavity opening, and the wall-pressure contours indicate the predominance of compressive acoustic waves inside the cavity before the vortex impingement. Besides, a noticeable low-pressure region near the top surface of the downstream wall ensued from the separated flow is observed and will be scrutinised later in Section 3.2. Subsequently, figure 4(b) shows the instant when the vortical structure induces sufficient downwash velocity to reattach the flow downstream. The reattachment of the flow causes the separation region to disappear. A rapid alteration of pressure fluctuation in the cavity is followed afterwards to signify subsequent rarefaction wave emissions.

3.1. Pressure fluctuations and oscillation frequencies

In this section, the focus is placed on the acoustic waves which manifest as the pressure fluctuations in the cavity. To realise this, the simulation is performed for 608,000

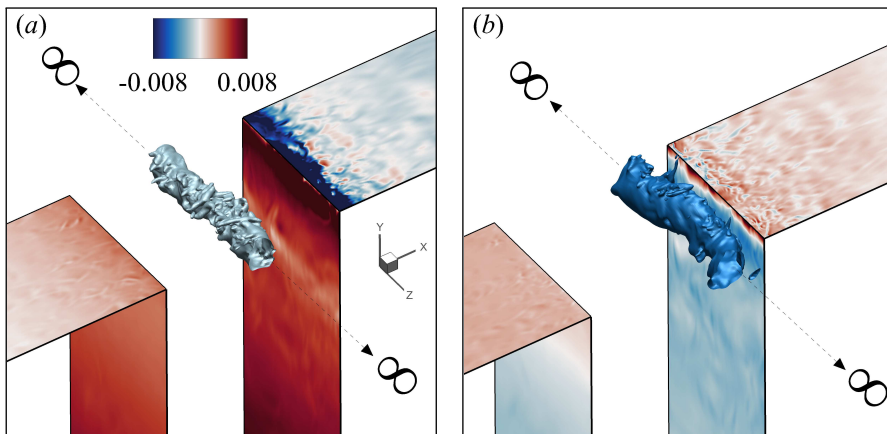


FIGURE 4. A large-scale vortical structure identified using iso-contour of instantaneous pressure fluctuation. Note that the flow is from left to right. The convection of the large-scale vortical structure and the associated change in wall-pressure fluctuation; (a) prior to the impingement; and, (b) after the impingement on the downstream corner, illustrate the aerodynamic noise emissions.

time steps to attain 100 non-dimensional time for the wall-pressure at the cavity base to reach a steady-periodic state. Figure 5(a) shows the time signals of the wall-pressure fluctuation measured on the cavity base at three different streamwise positions and are converged to a similar solution after approximately $ta_\infty/L = 100$. Subsequently, Fourier transform is carried out on an additional non-dimensional time of approximately 540 samples (every 0.325 time unit) of the computational data over a total duration of non-dimensional time of 175, corresponding to approximately 13 periods of the fundamental frequency. The resulting time signals are approximately periodic in time, and any steady component is removed prior to the Fourier transform. Different windowing functions has been attempted and the results show the comparable spectrum composition. Figure 5(b) shows the respective PSD of the wall-pressure signals where a fundamental frequency peak is observed at $fL/a_\infty = 0.077$ and the rest are superseded by higher harmonics. The invariance of the spanwise averaged wall-pressure fluctuation with respect to different streamwise locations on the cavity base can be understood by the fact that the wavelength of the acoustic field is much longer than the streamwise characteristic length of the cavity (i.e. $\lambda_a \gg L$). Therefore, the cavity is assumed to be acoustically compact, and the acoustic waves in the cavity can be modelled by a one-dimensional standing-wave. This is a reasonable approximation in deep cavity configurations as the depth is usually longer than that of in the streamwise direction.

The pressure fluctuations around the cavity can be characterised into two main regions: local hydrodynamic fluctuation near the cavity opening; and acoustic fluctuation around the cavity. Therefore, it is essential to decompose these pressure fields into the hydrodynamic and acoustic components to facilitate the investigations. To achieve this, we employ the momentum potential theory (MPT) developed by Doak (1989). Specifically in Doak's MPT, the momentum-density, $\rho\mathbf{u}$ is separated into rotational and irrotational components through a Helmholtz decomposition. The Helmholtz decomposition of $\rho\mathbf{u}$ may be written as:

$$\rho\mathbf{u} = \mathbf{B} - \nabla\psi, \quad \nabla \cdot \mathbf{B} = 0, \quad (3.1)$$

where \mathbf{B} and $\nabla\psi$ are the solenoidal and irrotational components of $\rho\mathbf{u}$, respectively. Sub-

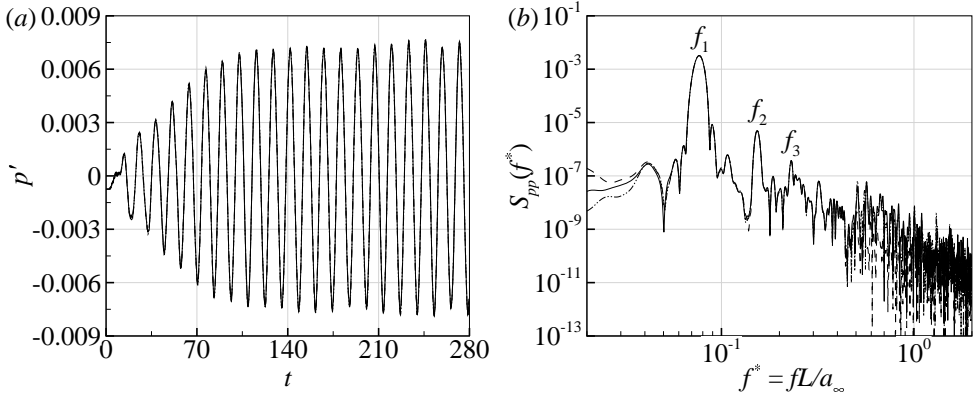


FIGURE 5. (a) Spanwise averaged of wall-pressure fluctuation time signals; and, (b) the corresponding PSD obtained at three different streamwise locations on the cavity base surface at $x/L = 0$ (—), $x/L = 0.5$ (- - -); and, $x/L = 1.0$ (- · · -). The fundamental frequency is denoted by f_1 , and the higher harmonics are represented by $f_2 = 2f_1$ and $f_3 = 3f_1$, respectively.

stituting (3.1) into the continuity equation yields a Poisson equation for the irrotational component, with a source term dependent on density fluctuations,

$$\nabla^2 \psi = \frac{\partial \rho}{\partial t}. \quad (3.2)$$

For a single phase continuum fluid, ψ is separated into acoustic component (irrotational and isentropic, denoted ψ_A) and entropic component (irrotational and isobaric, ψ_E) components, governed by the exact equations:

$$\psi = \psi_A + \psi_E, \quad \nabla^2 \psi_A = \frac{1}{c^2} \frac{\partial \rho}{\partial t}, \quad \nabla^2 \psi_E = \frac{\partial \rho}{\partial E} \frac{\partial E}{\partial t}. \quad (3.3)$$

Considering the low Mach number in this study, the entropy (thermal) contribution is assumed to be relatively small compared to the acoustic contribution, and therefore ψ_E is not included in the subsequent calculation. Then, the momentum equation in terms of the hydrodynamic and acoustic components is obtained by substituting (3.1) into the momentum equation, expressed as:

$$\frac{\partial}{\partial t} (\mathbf{B} - \nabla \psi) + \nabla \cdot \left[\frac{(\mathbf{B} - \nabla \psi)(\mathbf{B} - \nabla \psi)}{\rho} - \tau_{ij} \right] + \nabla p = 0. \quad (3.4)$$

By taking the divergence of (3.4), the Poisson equation for the hydrodynamic pressure fluctuation, p'_H :

$$\nabla^2 p'_H = S_H + \tilde{S}_H, \quad (3.5)$$

and the Poisson equation for the acoustic pressure fluctuation, p'_A :

$$\nabla^2 p'_A = S_A + \tilde{S}_A, \quad (3.6)$$

are derived. Accordingly, the hydrodynamic and acoustic pressure fluctuations are obtained by solving the Poisson equations in (3.5) and (3.6), respectively. The numerical implementation is described extensively in Unnikrishnan & Gaitonde (2016) and the evaluations of the linear (S_H and S_A) and the non-linear source terms (\tilde{S}_H and \tilde{S}_A) are detailed in Unnikrishnan & Gaitonde (2020), which are not repeated here for brevity.

Accordingly, the MPT is performed to decompose the pressure fields around the cavity into the hydrodynamic and acoustic components. Figure 6 shows snapshots of the

spanwise averaged instantaneous pressure fluctuation around the cavity region captured at four points in time separated by $T/4$ between two adjacent points, where $T = 1/f_1$ is the period of the oscillation at the fundamental frequency. Some discussions on the results shown in figure 6 can be made in relation to the acoustic pressure averaged over the bottom surface of the cavity:

$$\chi(t) = \frac{1}{A_b} \int_{A_b} p'_A(\mathbf{x}_b, t) dA, \quad (3.7)$$

where $y_b = -2.632L$ and $A_b = L_z L$ are the vertical coordinate and surface area of the cavity base, respectively. Figure 6(a) shows the beginning of the oscillation cycle of χ , where the large-scale vortex (represented by the low-pressure region) is located near the downstream corner as shown in figure 6(e). At this instant, a complete destructive interference between the reflected compressive and the incident rarefaction acoustic waves resulted in a pressure equilibrium (e.g. $\chi = 0$) in the cavity. Subsequently, downward deflection of the shear layer and the formation of discrete low-pressure spots near the upstream corner are observed. The former event marks the beginning of the constructive interference of rarefaction acoustic waves in the cavity and the latter event signifies the formation of small-scale vortices near the upstream corner.

The interaction of the prior large-scale vortex with the downstream corner intensified as the distinct low-pressure region is located closer to the downstream wall. This generates additional rarefaction waves which constructively interfere with that of reflected from the cavity base. Consequently, the wall-pressure fluctuation reduces until a minimum χ is exerted on the cavity base as shown in figure 6(b). Concurrently, the coalescence of newly formed vortices into organised structures synchronised with the continual downward deflection of the shear layer near the upstream corner is observed in figure 6(f). This is followed by the emergence of a local high-pressure region near the downstream wall caused by the impeded shear layer that signifies the inception of stagnated flows.

As the flow field is severely retarded by the downstream corner, a highly stagnated region is established and this is accompanying by an increase in pressure fluctuation near the downstream wall as shown in figure 6(g). Similarly, the shear layer-wall interaction also amplifies the low-pressure region at the top surface of the downstream wall owing to flow separation. At this moment, a complete destructive interference between the incident compressive acoustic waves and the rarefaction waves reflected from the cavity base is observed in figure 6(c). Subsequently, this is followed by the successive constructive interference in the cavity accompanied by an increase in the wall-pressure fluctuation. The newly formed vortices near the upstream corner undergo series of amalgamations into a large-scale vortex as represented by the distinct low-pressure region in figure 6(g).

Figure 6(d) shows the instant when the averaged acoustic wall-pressure, χ acting on the cavity base is maximum owing to the complete constructive interference of compressive acoustic waves. At this time, the shear layer slowly detaches from the downstream corner which alleviates the high-pressure region from the flow stagnation. Simultaneously, the arrival of the newly-formed large-scale vortex induces sufficient downwash velocity to reattach the flow near the downstream corner, causing the low-pressure region stemmed from the separation bubble to disappear as shown in figure 6(h). Accordingly, a complete destructive interference occurs when the large-scale vortex impinges onto the downstream corner to complete a single oscillation cycle of χ .

Subsequently, the Fourier transform is performed to investigate the pressure fields associated with the hydrodynamic and acoustic components around the cavity at the tonal frequencies. The spatial distribution of the Fourier transformed acoustic pressure fluctuation is shown in figure 7. Notably, the acoustic wall-pressure fluctuation, p_A along

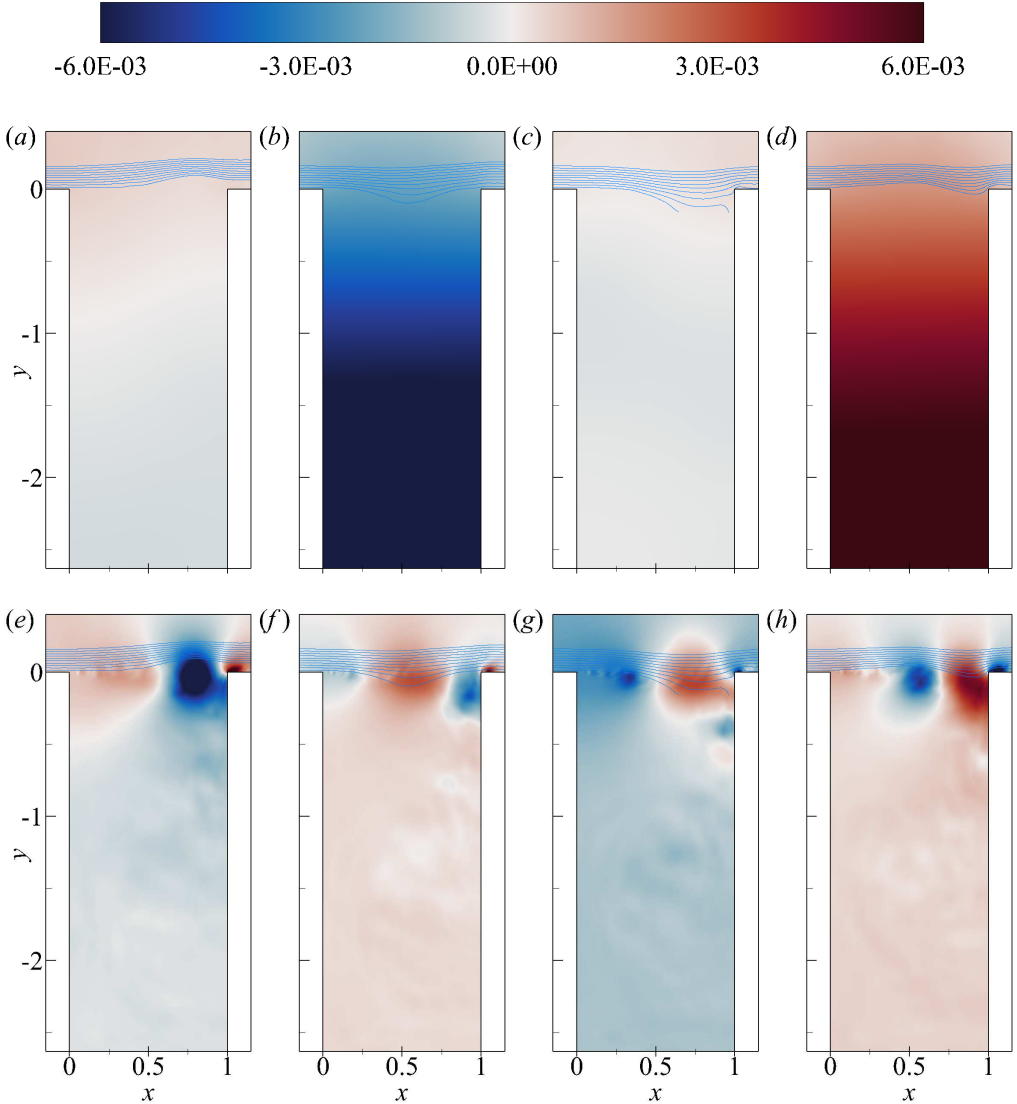


FIGURE 6. Snapshots of the spanwise averaged instantaneous pressure fluctuations around the cavity with superimposed streamlines to signify the shear layer undulations across the cavity opening with a time interval of $T/4$ between two successive plots from (a) to (d) for the acoustic component, p'_A ; and, from (e) to (h) for the hydrodynamic component, p'_H , where T is the period of the oscillation cycle of χ .

the upstream wall shows that the amplitude increases along with the cavity depth, and the mode shape bears a close resemblance of a one-quarter acoustic standing-wave at the fundamental frequency. In addition, a curve-fitted cosine function reveals the wavelength of the standing-wave is in close agreement with the depth of the cavity. Thus, this result confirmed that the fundamental frequency peak is the consequence of the first depthwise acoustic resonance in the current cavity configuration. Besides, the transition to higher acoustic mode is also apparent at higher harmonics, despite the magnitudes being significantly weaker as revealed in figure 7(d, e). This may be attributed to the fact

that smaller vortices arise from the pairing process at the increased passage frequency as shown in figure 8(b, c), are generally weaker than that of a single large-scale vortex (Ziada 1994; Bravo *et al.* 2005). In addition, highly damped oscillations outside of the cavity resonant frequency range may weaken the overall fluid-acoustic coupling mechanism (Koch 2005).

In short, these spectral results reveal the current cavity configuration facilitates an efficient conversion of the hydrodynamic energy to acoustic energy at the resonant frequency. Therefore the possibility of a fluid-acoustic coupling between the shear layer and the standing-wave remains an interesting point to study. Before investigating this in more detail, it may be helpful first to discuss the hydrodynamic field near the cavity opening in Section 3.2, followed by the subsequent interaction with the acoustic resonance later in Section 3.3.

3.2. Hydrodynamic field and the associated noise generation mechanism

In this section, the hydrodynamic field across the cavity opening will be discussed in detail. The previous discussion has indicated that the location of the large-scale vortex plays a primary role in the acoustic wave emission process. Therefore, an accurate assessment of the position and the actual path travelled by the vortical structure, which are functions of time is important in this investigation. Generally, the location of the vortical structure can be extracted by using the pressure minima technique. Figure 8 shows the real part of the Fourier transformed hydrodynamic pressure fluctuation around the cavity opening region at the tonal frequencies, and the number of vortices (e.g. low-pressure region) increases following the passage frequencies. Furthermore, the streamwise amplification of the hydrodynamic pressure due to the coherent vortex formation at the tonal frequencies are observed in figure 9. However, an accurate quantification of the hydrodynamic mode based on the number of discrete low-pressure spots is difficult to justify due to the possible influence from the separation region near the downstream corner. To overcome this, the location of the vortical structure is identified by the equivalent Q -criterion. According to Bradshaw (1981), is given by,

$$Q = \epsilon_{ij}\epsilon_{ji} - \frac{1}{2}\omega_i^2 \approx -\nabla^2 p_H / \rho_\infty = \tilde{Q}, \quad (3.8)$$

where $\epsilon_{ij} = \frac{1}{2}(\partial u_i / \partial x_j + \partial u_j / \partial x_i)$ is the rate of strain, ω_i is the vorticity of the velocity field and $\nabla^2 p_H$ is the Laplacian of the hydrodynamic pressure field. The advantage of this formulation has two folds, firstly (3.8) provides a link between the velocity gradient field and the hydrodynamic pressure field to better locate position of the vortex. Secondly, the strain-rate and vorticity fields provide physical interpretations of the velocity field, which are useful in qualifying the following noise generation mechanism.

Figure 10 shows an oscillation cycle of χ similar to that of figure 6, with a particular attention given to the vortex dynamics near the cavity opening region. Plotted is the Q -criterion, Q calculated from (3.8), and superimposed with streamlines to signify the shear layer oscillation near the cavity opening. The instant when the large-scale vortex impinges on the downstream corner is shown in figure 10(a). Note that the large-scale vortex core location prior to the impingement is slightly below the cavity opening line (e.g. $y/L < 0$). Consequently, the interaction of the vorticity field with the front surface of the downstream wall necessitates an imaginary mirror image of an opposite vorticity field to satisfy the non-slip boundary condition at the wall. The presence of near-wall vorticity translates into a low hydrodynamic pressure field since $\nabla^2 p_H > 0$. This induces rarefaction acoustic waves that destructively interfere with the reflected compressive acoustic waves in the cavity. Simultaneously, the separated shear layer

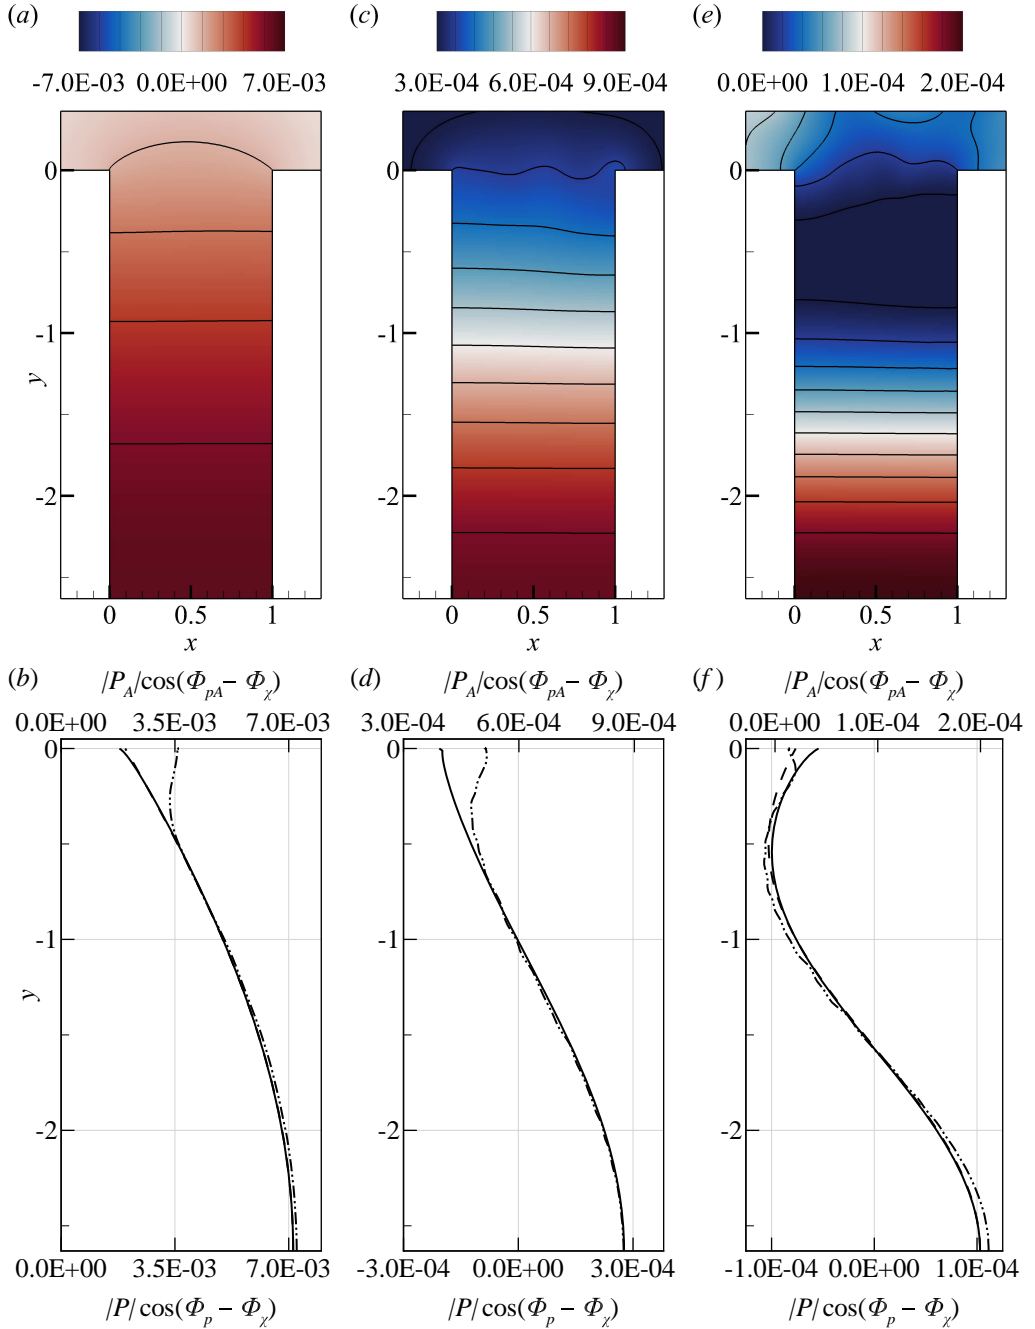


FIGURE 7. Contour plots of spatial variation of the acoustic pressure fluctuation calculated by $|P_A| \cos(\Phi_{pA}(\mathbf{x}, f) - \Phi_\chi(\mathbf{x}, f))$, and the distribution of the acoustic wall-pressure fluctuation (—), curve-fitted cosine function (---) and the total wall-pressure fluctuation (-·-·) in the depthwise direction along the upstream wall (e.g. $x/L = 0$) at (a, b) $f = f_1$; (c, d) $f = f_2$; and, (e, f) $f = f_3$. Note that $\Phi_\chi(\mathbf{x}, f)$ represents the phase of the Fourier transform of χ defined in (3.7).

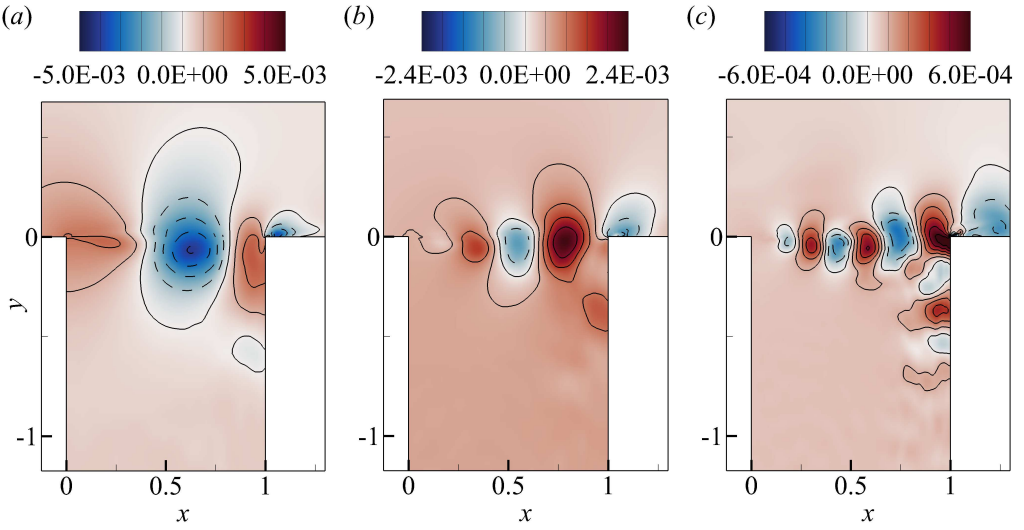


FIGURE 8. Spatial variation of the hydrodynamic pressure fluctuation near the cavity opening region, calculated by $|P_H| \cos(\Phi_{pH}(\mathbf{x}, f) - \Phi_{pH}(\mathbf{x}_0, f))$ at (a) $f = f_1$; (b) $f = f_2$; and, (c) $f = f_3$, where $\Phi_{pH}(\mathbf{x}_0, f)$ refers to the phase information at the upstream corner.

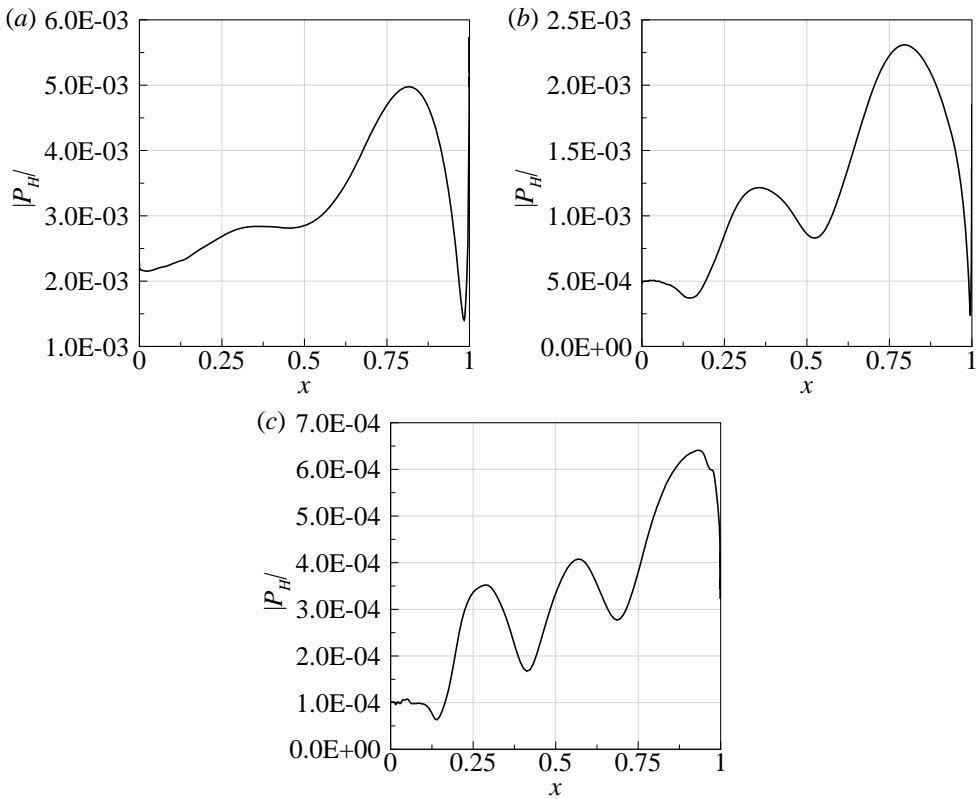


FIGURE 9. Streamwise variation of the magnitude of Fourier transformed hydrodynamic pressure fluctuation, $|P_H(\mathbf{x}, f)|$ along the cavity opening (e.g. $y/L = 0$) at (a) $f = f_1$, (b) $f = f_2$ and (c) $f = f_3$.

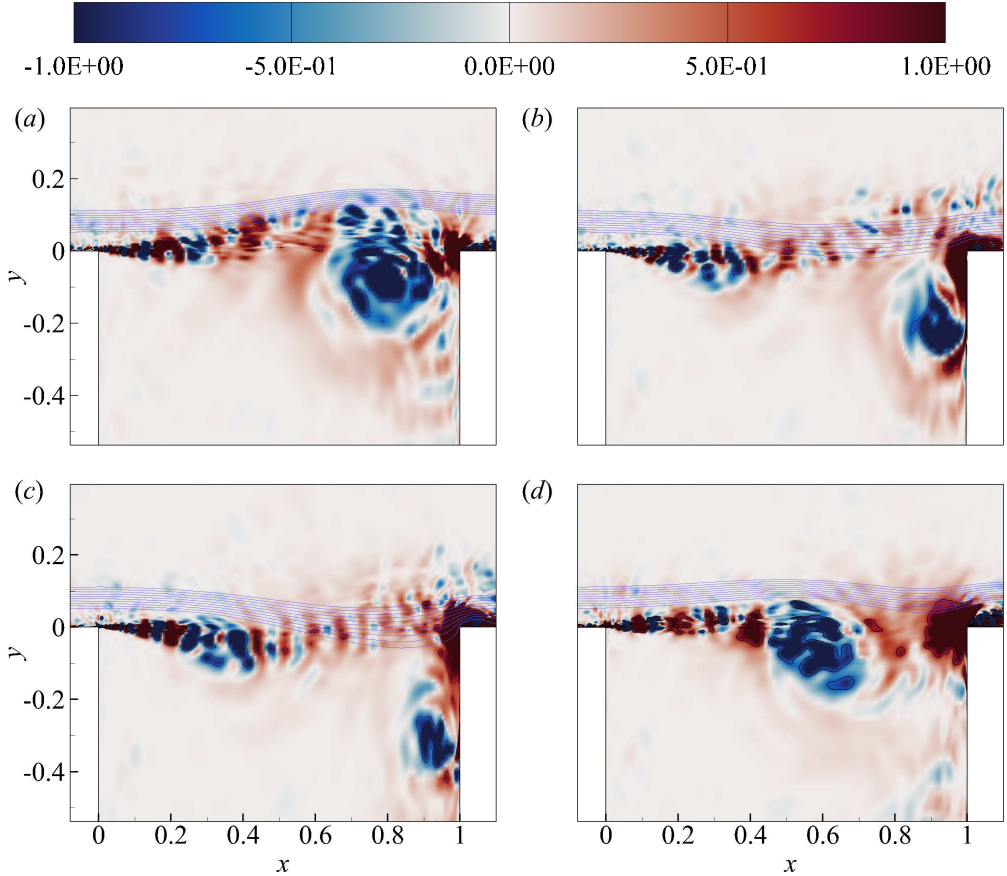


FIGURE 10. The vortex dynamics near the cavity opening region. Plotted is the contour of the Q -criterion, Q calculated from (3.8) and the superimposed streamlines to signify the gross deflection of the shear layer. For the corresponding pressure fields, see figure 6.

emanated from the upstream corner develops small-scale vortices caused by the Kelvin-Helmholtz instabilities before the coalescence into coherent vortices under the influence of acoustic forcing.

As the large-scale vortex fully impinges on the front surface of the downstream wall, the vorticity field acting on the wall is amplified and this necessitated an imaginary mirror image of a stronger opposite vorticity field to counteract the imposed vorticity field. As a result, additional rarefaction acoustic waves are generated, which interfere constructively with the acoustic waves reflected from the cavity base. This is followed by a downward deflection of the shear layer near the downstream corner, leading to the formation of a secondary vortex as the large-scale vortex is stretched and swept down into the cavity as shown in figure 10(b). The formation of the separated boundary layer induces a compressive pressure field (e.g. $\nabla^2 p_H < 0$) on the front surface of the downstream wall, similar to the vortex-ring/wall interaction reported by Naguib & Koochesfahani (2004). Also, the shear layer-wall interaction formed a region of a high strain-rate field, (e.g. $Q > 0$) on the downstream wall due to stagnated flow, and a high vorticity field, (e.g. $Q < 0$) on the top surface of the downstream wall ensued from the flow separation. These concurrent events mark the beginning of the overall compressive acoustic waves emission.

As the shear layer is further displaced downward near the downstream corner as shown in figure 10(c), the strain-rate intensified in response to a higher degree of flow stagnation, which corresponds to further emissions of compressive acoustic waves. Similarly, a large amplitude low-pressure region is formed near the edge of the top surface of the downstream corner due to excessive flow separation. At the same time, the newly formed vortices near the upstream corner begin to form a large-scale vortical structure (represented by $Q < 0$) through additional vortex pairings, which is visually similar to the “collective interaction” according to Ho & Nosseir (1981).

As the shear layer slowly detaches from the downstream corner, the high strain-rate region by the stagnated flow gradually alleviates and the high vorticity region reduces as the flow reattaches. Further development of vortical structure stemming from the additional vortex pairings is observed in Figure 10(d). This is followed by the impingement of the newly formed large-scale vortex on the downstream wall’s front surface as shown in 10(a). As a result, a low-pressure region is exerted onto the downstream wall and the separation region disappeared completely when the flow is fully reattached. This type of vortex-corner interaction where the vortical structure impinges directly onto the downstream wall is known to produce intense pressure fluctuation similar to a dipole source (Tang & Rockwell 1983).

In the current investigation, the separation bubble formation is synchronised with the acoustic pressure fluctuation in the cavity and dependent upon the shear layer’s vertical displacement near the downstream corner. To illustrate this, a few representative parameters are first introduced. The separation bubble’s upper and lower surfaces are defined by the iso-lines of zero streamwise velocity (e.g. $u = 0$). Then, the area of the separation bubble region (A_{SB}) is defined by integrating the wall-normal distance along these iso-lines in the streamwise direction. Accordingly, the similarity in time variation of A_{SB} and the averaged wall-pressure fluctuation, χ is shown in figure 11. From figure 12, the periodic pulsation of the separation bubble around the downstream corner of the cavity indicates there is a significant change in flow momentum (both vertically and horizontally), resulting in a strong periodic wall-pressure fluctuation which translates into sound emissions. Therefore, it is speculated that the onset of the separation bubble as a consequence of the shear layer undulation could be used as an indication of the acoustic emission process.

From the discussion above, it is clear that the interaction of the large-scale vortex (vorticity field) with the downstream corner mainly contributes to the rarefaction (low-pressure) acoustic waves inside the cavity. In contrast, the stagnation (strain-rate field) and separation flow caused by the undulation of the shear layer near the downstream corner are jointly responsible for compressive (high-pressure) acoustic waves emission inside the cavity. Therefore, it may be possible to describe the aerodynamic noise generation owing to the unsteady loading near the downstream corner in term of a surface source according to Curle (1955). Another possible explanation of the noise generation mechanism can be attributed to the shear layer deflection across the cavity opening (Elder 1980). Specifically, Dai *et al.* (2015) suggested that the shear layer oscillation couples with the cavity acoustic mode through an explicit force-balance relationship between the two sides (i.e. cavity opening and the cavity base). Accordingly, figure 13(a, b) shows the space-time contour plots of the rate of change of decomposed vertical momentum-density across the cavity opening (e.g. $y/L = 0$), where the solenoidal component, B_y induced by the large-scale vortex is highly localised in space compared to the uniformly distributed irrotational component, $\nabla\psi_A$. By integrating the vertical momentum-density rate, $d(\rho v)/dt$ across the cavity opening in the streamwise direction,

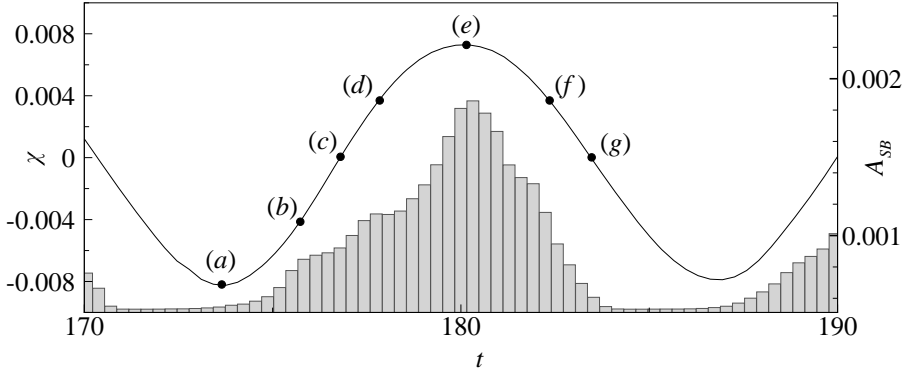


FIGURE 11. Time variation of the separation bubble area, A_{SB} (shown by the histogram) caused by flow separation/reattachment near the top surface of the downstream corner. Plotted also is the averaged acoustic wall-pressure fluctuation exerted on the cavity base, χ (—) to signify the following flow events: the minimum point (a) indicates the beginning of the downward deflection of the shear layer, leading to the formation of low-pressure region ensued from the flow separation at the top surface of the downstream corner. The equilibrium point (g) indicates the disappearance of separation region due to the reattached flow by the arrival of the large-scale vortex near the downstream corner.

the total mass flow rate, \dot{m} is separated into the solenoidal and irrotational components by:

$$\frac{d\dot{m}_A}{dt}(t) = -\frac{1}{dt} \int_0^L \nabla \psi_A(x, y=0) dx, \quad (3.9a)$$

$$\frac{d\dot{m}_H}{dt}(t) = \frac{1}{dt} \int_0^L B_y(x, y=0) dx. \quad (3.9b)$$

From figure 13(c), it is apparent that the rate of change of the acoustical mass flow rate across the cavity opening is proportional to the acoustic force exerted on the cavity base, that is:

$$\frac{d\dot{m}_A}{dt}(t) \propto \chi(t). \quad (3.10)$$

A similar relationship was inferred for shallow cavity flows by Rowley *et al.* (2002). Furthermore, the present result shows that the force exerted across the cavity opening is predominantly associated with the acoustic component, which may be useful in explaining the synchronised oscillation of the shear layer with the acoustic field in the cavity.

3.3. Fluid-acoustic coupling mechanism

In Section 3.1, it is evident that the fundamental resonant frequency with a mode shape similar to a one-quarter wave is presented in the cavity. Therefore, it bears the question of whether an effective coupling mechanism exists between the shear layer and the acoustic resonance to facilitate this formation. As mentioned, past investigations have indicated the acoustic resonance has a deterministic role on shear layer oscillation, particularly near the receptivity of the shear layer (e.g. upstream corner). Therefore, a better understanding of the phase relationship between the region of maximum receptivity of the shear layer and the acoustic resonance is crucial in this investigation. One plausible way to achieve this is to invoke the one-dimensional plane wave approximation, whereby

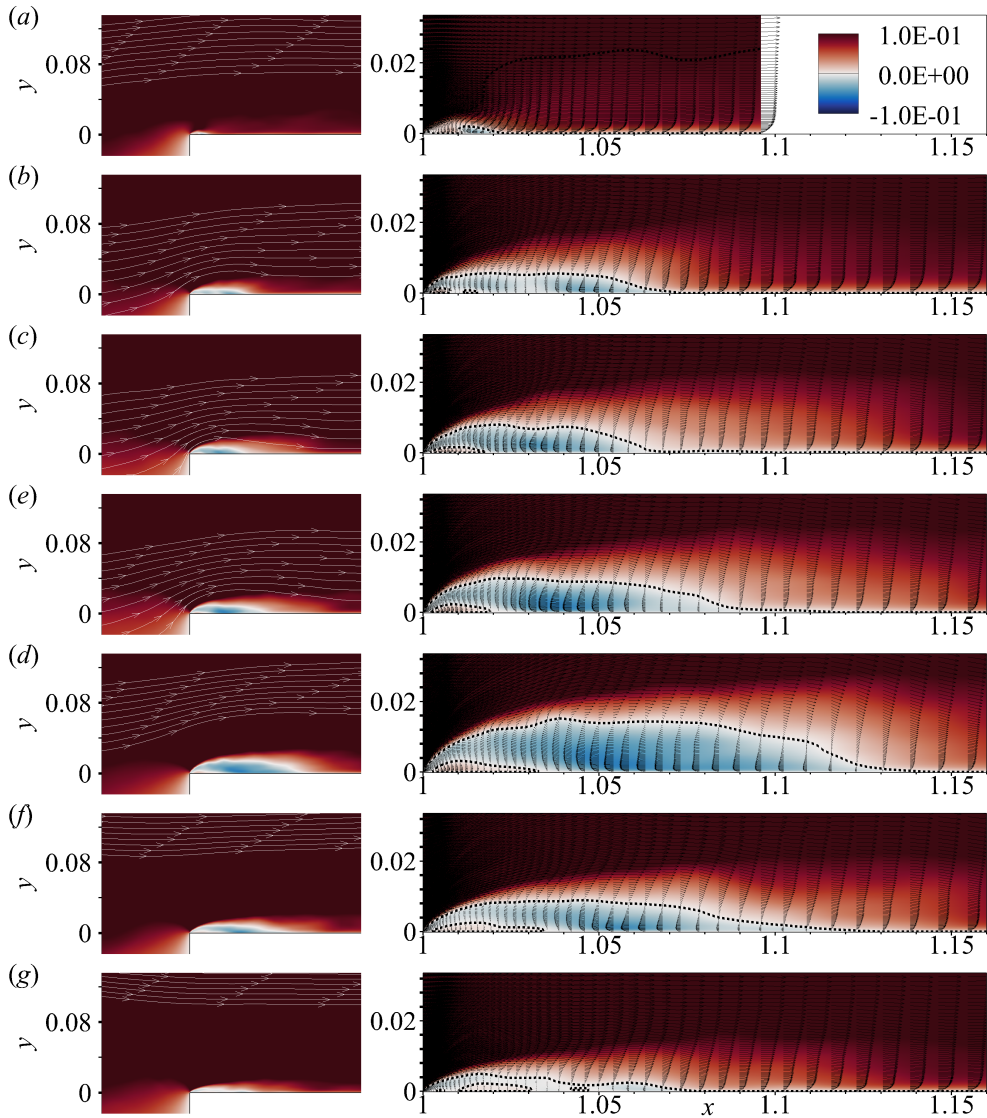


FIGURE 12. Distribution of spanwise averaged instantaneous streamwise velocity in and around the separation bubble near the top surface of the downstream wall at the indicated time instants in figure 11. The contours (left) are superimposed with streamlines to visualise the deflection of the shear layer; and (right) are superimposed with instantaneous velocity vectors and the dashed lines are used to indicate the surfaces of separation bubble by iso-lines at which the streamwise velocity is zero (e.g. $u = 0$).

the standing-wave induces acoustic particle velocity primarily in the vertical direction. This approximation is justified for the current cavity configuration based on our previous observation in Section 3.1, that the acoustic pressure field bears a close resemblance to a one-quarter vertical standing-wave. Accordingly, Fourier transform is performed on the space-time vertical velocity fluctuation across the cavity opening and the respective magnitude, $|V(\mathbf{x}, f)|$ and phase, $\Phi_v(\mathbf{x}, f)$ at the tonal frequencies are plotted in figure 14.

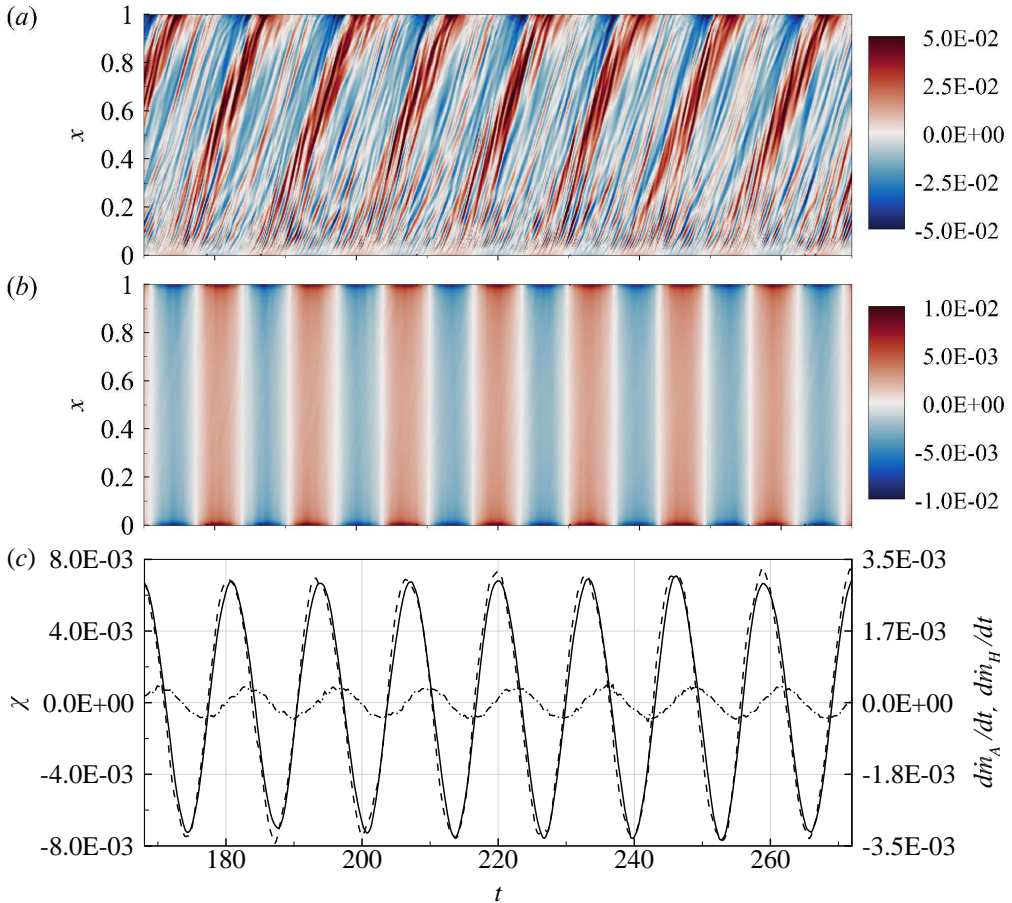


FIGURE 13. Space-time contour plots of (a) the solenoidal (hydrodynamic) component; (b) the irrotational (acoustic) component of the rate of change of vertical momentum-density, $\partial(\rho v)/\partial t$ across the cavity opening (e.g. $y/L = 0$); and, (c) the force-balance relationship between the averaged acoustic wall-pressure fluctuation at the cavity base, $\chi(t)$ (—), rate of change of acoustical mass flow rate, $dm_A(t)/dt$ (- - -) and hydrodynamic mass flow rate, $dm_H(t)/dt$ (- · - ·)

At the resonant frequency, the streamwise amplification follows almost a linear fashion reaching up to $x/L \approx 0.55$ before reduces to a local minimum and rises to a concentrated peak near the downstream corner as shown in figure 14(a). The former reduction is caused by the nonlinear saturation mechanism, which prevents the unbounded growth of vortex strength. The latter is caused by the intensified strain-rate field generated by the shear layer-wall interaction discussed in Section 3.2. In addition, the cosine of the phase difference, $\cos[\Phi_v(\mathbf{x}, f_1) - \Phi_\chi(\mathbf{x}, f_1)]$ as shown in figure 14(a) reveals a region of frequency modulation where the velocity fluctuation near the upstream corner remains highly synchronised with the averaged acoustic wall-pressure fluctuation at the cavity base, χ . This demonstrates the important point that the vertical velocity oscillation in the separated shear layer is highly controlled by the depthwise acoustic resonance. Subsequently, the modulated shear layer oscillation and the subsequent amalgamation of vortices at the resonance state are manifested through the linear amplification regime.

At the first harmonic frequency, an exponential streamwise amplification of the

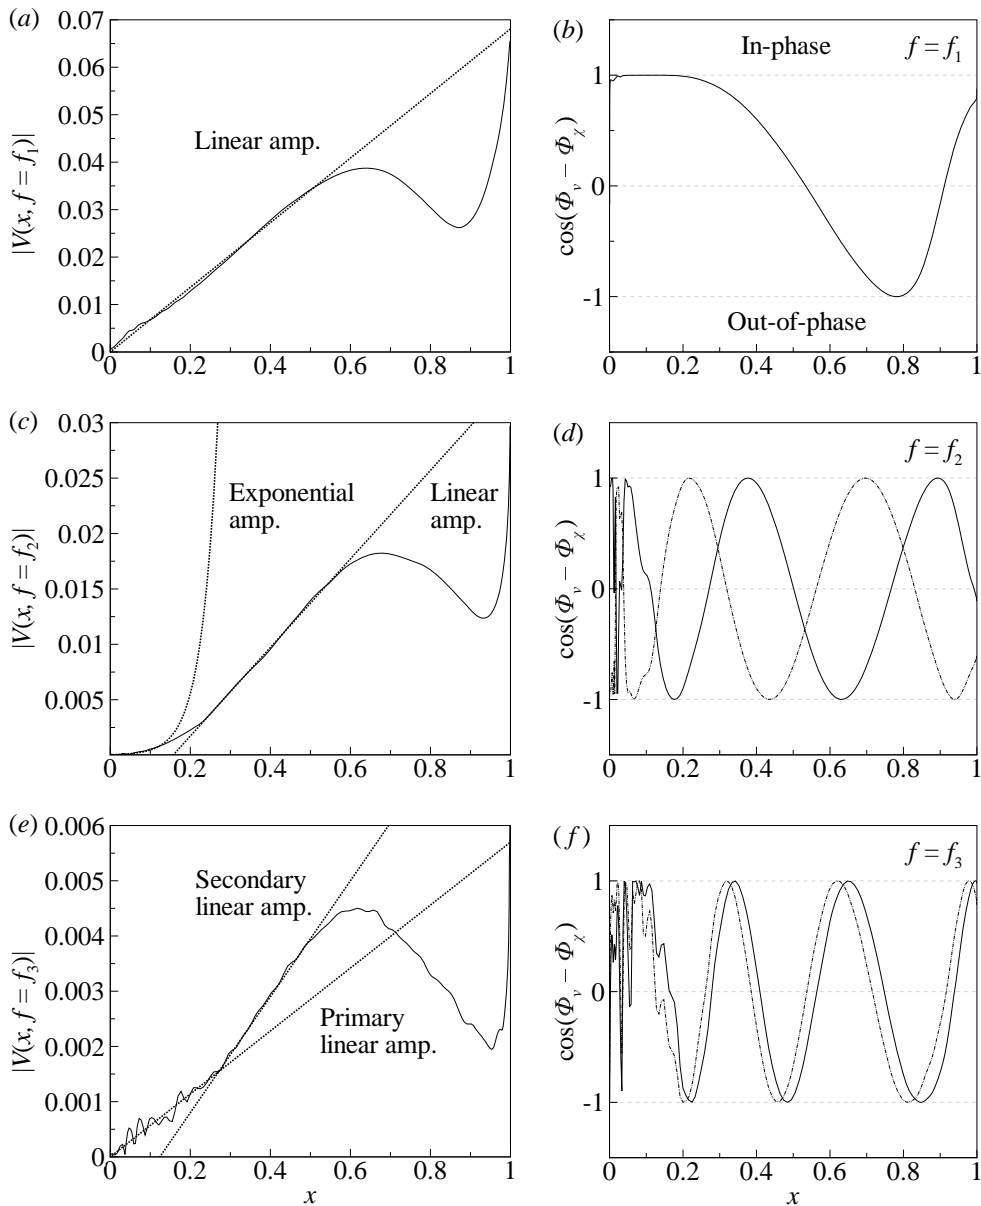


FIGURE 14. Streamwise variation of magnitude and phase of the Fourier transformed vertical velocity fluctuation, $V(\mathbf{x}, f)$ across the cavity opening (e.g. $y/L = 0$) at (a, b) $f = f_1$; (c, d) $f = f_2$; and, (e, f) $f = f_3$. In plots (a, c, e), the magnitude $|V(\mathbf{x}, f)|$ is represented by (—) and the regression lines (·····) are used to indicate the amplification rate(s). In plots (b, d, f), the cosine of the phase difference, $\cos[\Phi_v(\mathbf{x}, f) - \Phi_\chi(\mathbf{x}, f_1)]$ is shown by (—), while the dashed line (---) is used to denote $\cos[\Phi_v(\mathbf{x}, f) - \Phi_\chi(\mathbf{x}, f_2)]$ in (d) and $\cos[\Phi_v(\mathbf{x}, f) - \Phi_\chi(\mathbf{x}, f_3)]$ in (f), respectively.

vertical velocity fluctuation is observed near the upstream region (e.g. $x/L < 0.15$). It is then followed by the transition to a linear amplification rate up to approximately $x/L \approx 0.6$ before the onset of nonlinear saturation as shown in figure 14(c). The former exponential amplification rate can be explained by the lack of acoustic reinforcement due

to the out-of-phase relationship (e.g. $\cos[\Phi_v(\mathbf{x}, f_2) - \Phi_\chi(\mathbf{x}, f_2)] < 0$) near the upstream region (e.g. $x/L < 0.15$) as shown in figure 14(d). Therefore, the formation of coherent vortices is retarded and resulting in a free shear layer oscillation that may be described by the linear theory (Michalke 1972). The transition to a linear amplification begins when the vertical velocity fluctuation is in-phase (e.g. $\cos[\Phi_v(\mathbf{x}, f_2) - \Phi_\chi(\mathbf{x}, f_2)] > 0$) near $x/L \approx 0.15$. In this linear amplification regime, the hydrodynamic instabilities are amplified and evolved into coherent vortex structures in response to the synchronised acoustic forcing. Subsequently, this is followed by an onset of the nonlinear saturation before rises to a concentrated velocity peak near the downstream corner caused by the intensified strain-rate field.

At second harmonic frequency, the exponential streamwise amplification near the upstream region is replaced by a primary linear amplification as shown in figure 14(e), thus implies the acoustic reinforcement based on the evidence provided above. This is apparent in figure 14(f) that the vertical velocity fluctuation near the upstream region is highly in-phase with χ at both resonant frequency (e.g. $\cos[\Phi_v(\mathbf{x}, f_3) - \Phi_\chi(\mathbf{x}, f_1)] > 0$) and second harmonic frequency (e.g. $\cos[\Phi_v(\mathbf{x}, f_3) - \Phi_\chi(\mathbf{x}, f_3)] > 0$). Similarly, it is also noticeable that the transition to a secondary linear amplification occurs when the vertical velocity fluctuation begins to oscillate in synchrony with the acoustic field near $x/L \approx 0.25$. As a result, this additional reinforcement translates into a larger linear amplification. Accordingly, the vertical velocity fluctuation amplifies further before being suppressed by the nonlinear saturation followed by a concentrated velocity peak caused by the intensified strain-rate field.

Also, it is worth investigating how the acoustic forcing magnitude in terms of the acoustic particle velocity varies at each tonal frequency. Based on the mode shapes of the standing-waves observed in figure 7, the induced acoustic particle velocity at the cavity opening can be approximated by the isentropic Euler equations according to Rienstra (2015) and is given by:

$$\frac{dv_A}{dt} = -\frac{\nabla p_A}{\rho}, \quad (3.11)$$

where v_A represents the induced acoustic particle velocity and p_A is the decomposed acoustic pressure field. By considering a sinusoidal fluctuation of the acoustic pressure and incompressibility result in:

$$v_A = \frac{\nabla p_A}{2\pi f}, \quad (3.12)$$

an estimated acoustic particle velocity magnitude of approximately $|v_A|/U_\infty \approx 3.7 \times 10^{-2}$, $|v_A|/U_\infty \approx 7.8 \times 10^{-4}$ and $|v_A|/U_\infty \approx 3.7 \times 10^{-4}$ for the tonal frequencies respectively. At the resonant frequency, the acoustic particle velocity magnitude corresponds to a ‘‘moderate pulsation level’’ category, in which the nonlinear effects reinforce a concentration of the vorticity shed at the upstream corner into a large-scale vortex (Bruggeman *et al.* 1991), aligned with figure 10. Coincidentally, the Strouhal number based on momentum thickness, $St_\theta = f_1\theta/U_\infty = 0.0148$ is close to the subharmonic of the most-amplified frequency of a turbulent free shear layer $St_\theta = f\theta/U_\infty = 0.024$ (Ho & Huerre 1984). This may allows an enhanced vortex merging in the forced shear layer through the ‘‘collective interaction mechanism’’ according to Ho & Huang (1982). At higher harmonics, the values of the acoustic particle velocity magnitude correspond to ‘‘low pulsation levels’’, in which the linear theory is applicable to explain the exponential amplification of the free shear layer perturbation at the first harmonic frequency observed in figure 14(c), with the exception to second harmonic frequency showed in figure 14(e). Therefore, it is postulated that the transition from a free shear layer oscillation (e.g. exponential amplification) to

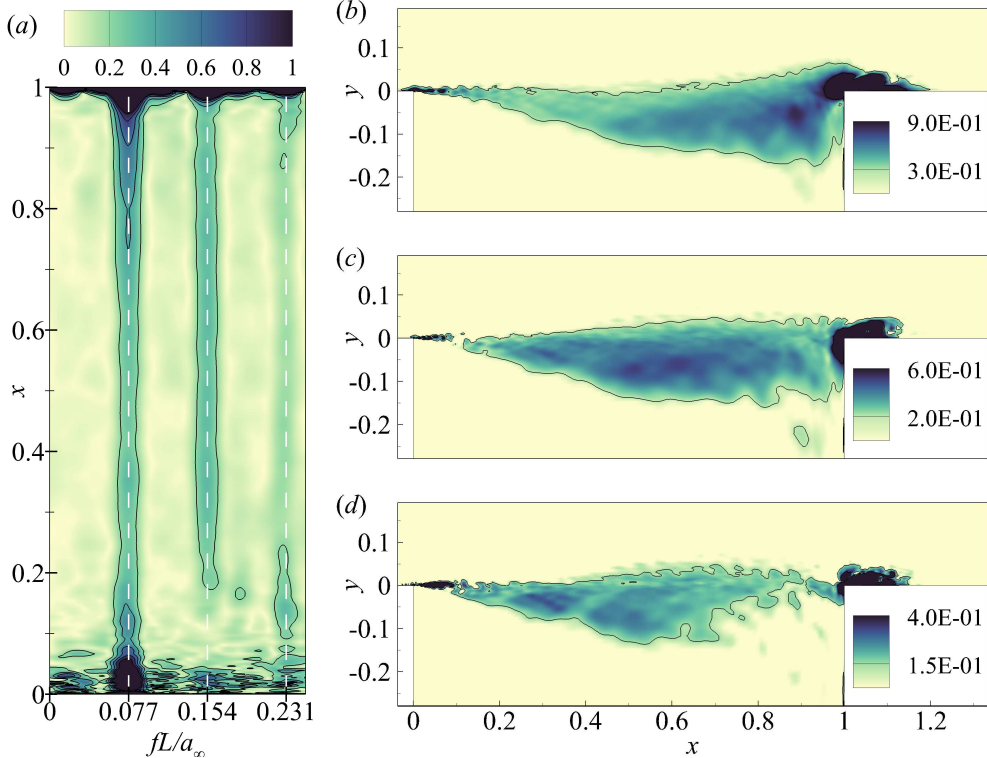


FIGURE 15. (a) Contour plot of the space-frequency variation the Fourier transformed Q -criterion magnitude, $|Q(\mathbf{x}, f)|$ across the cavity opening (e.g. $y/L = 0$), and the respective spatial variation of $|Q(\mathbf{x}, f)|$ at (a) $f = f_1$; (b) $f = f_2$; and, (c) $f = f_3$.

the formation of coherent vortices (e.g. linear amplification) necessitates the condition of a favourable phase relationship between the hydrodynamic and acoustic particle velocity fluctuations (e.g. $\cos[\Phi_v(\mathbf{x}, f) - \Phi_\chi(\mathbf{x}, f)] > 0$).

3.4. Convection speed of coherent vortical structures

As discussed earlier, the streamwise phase variation of the hydrodynamic pressure fluctuation is not a reliable measurement of the hydrodynamic mode since the influence from the separation region near the downstream corner may be significant. Therefore, inspired by the reasoning in Section 3.2, the Q -criterion, Q calculated from (3.8) is used. Accordingly, Fourier transform is performed and the respective magnitudes, $|Q(\mathbf{x}, f)|$ are plotted in figure 15. The frequency-space contour in figure 15(a) shows the small concentrations of Q -criterion near the upstream corner are mostly energetic near the fundamental frequency, and much weaker at higher harmonics. In addition, the propagation pathways of coherent vortical structures across the cavity opening at the tonal frequencies are depicted in figure 15(b, c, d), in which the elevations are slightly below the cavity opening line. To account for this variation, the phase measurement is performed along a line in the streamwise direction at which the elevation is determined by the maximum magnitude location. Accordingly, plotted in figure 16(a) are the streamwise phase variation of $\Phi_Q(\mathbf{x}, f_1)$ and the respective $\Phi_\chi(\mathbf{x}, f_1)$ across the cavity opening. It is evident that the Q remains highly in-phase with χ near the upstream corner before completing an approximate single oscillation cycle. Hence, this result reconfirmed two

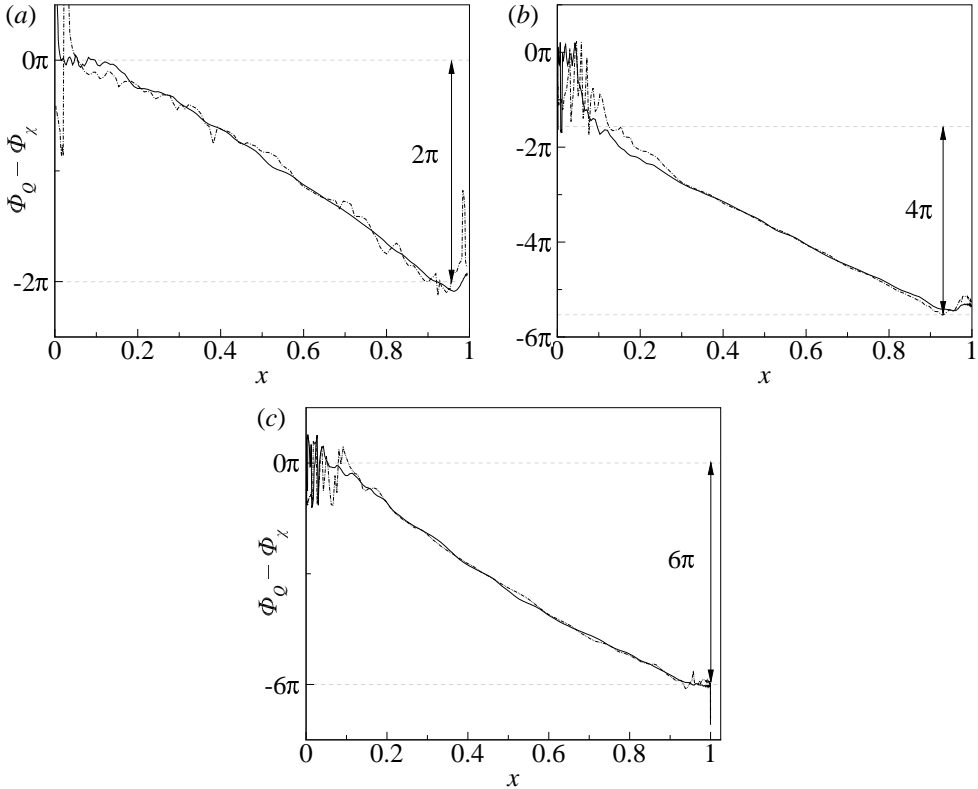


FIGURE 16. Streamwise phase variation of the Q -criterion, $\Phi_Q(\mathbf{x}, f)$ (—) and the respective Laplacian of hydrodynamic pressure field, $\Phi_{\bar{Q}}(\mathbf{x}, f)$ (- - -) at (a) $f = f_1$; (b) $f = f_2$; and, (c) $f = f_3$. Note here that the phase, $\Phi_Q(\mathbf{x}, f)$ and $\Phi_{\bar{Q}}(\mathbf{x}, f)$ are both calculated based on the phase reference of $\Phi_\chi(\mathbf{x}, f)$.

important points: that is the formation of small-scale vortices is highly in-phase with the acoustic forcing near the upstream region (e.g. $\cos[\Phi_Q(\mathbf{x}, f_1) - \Phi_\chi(\mathbf{x}, f_1)] = 1$), thus suggests a strong evidence of an frequency modulation by the acoustic resonance in cavity; and the phase criterion, that is $\Delta\Phi_Q(\mathbf{x}, f_1) = 2\pi$, has to be satisfied for a self-sustained oscillation of the first hydrodynamic mode (Rockwell & Naudascher 1979; Knisely & Rockwell 1982; Rockwell 1983; Tuna & Rockwell 2014). Similar descriptions are also applicable for the higher harmonics as shown in figure 16(b, c). Based on the linear dispersion relation, the phase variation translates in an average vortex convection speed ratio of $k = U_c/U_\infty = 0.386$ at each tonal frequency, which is close to the value suggested for deep cavities such as $k = 0.3$ by Graf & Durgin (1993), $k = 0.38$ by Ma *et al.* (2009) and $k = 0.4$ by (Nelson *et al.* 1983; Bruggeman 1987; Bruggeman *et al.* 1991), respectively.

4. Prediction of the critical freestream velocity

The primary aim of this investigation is to devise a semi-empirical model to predict the critical freestream velocity at which the incoming turbulent boundary layer couples with a depthwise acoustic resonance in deep cavities. The motivation is driven by the fact that the physical mechanism involves the depthwise resonance of deeper cavities with

high aspect ratios ($D/L \gg 1$) is still relatively under-examined. Therefore, in this section, a brief review of past attempts on the development of prediction models for cavity flows will be discussed. Based on the observations outlined in this paper, a prediction model of the critical freestream velocity that incorporates the cavity depth is proposed.

The physical mechanism that describes the self-sustained oscillation was first introduced by the feedback mechanism, according to Rossiter (1964). Rossiter observed shallow cavities (with L/D ranging between 1 to 4) tend to generate aerodynamic tonal noises, then he proposed an empirical formula to explain the feedback process. In term of Helmholtz number, it is given by:

$$\frac{f_n L}{a_\infty} = \frac{n - \alpha}{\frac{U_c}{U_\infty} + 1}, \quad (4.1)$$

where n is the hydrodynamic mode. The empirical constant, α is proposed to account for an additional emission delay and the ratio $\kappa = U_c/U_\infty$ is proposed to simplify the model by assuming a constant vortex convection velocity across the cavity opening. Thus, the physical interpretation of the Rossiter's feedback mechanism contained in (4.1) can be described as the summation of time duration for the downstream propagation of vortex at the constant convection velocity, and the subsequent upstream propagation of acoustic wave at the speed of sound.

However, it is worth noting that the constants in Rossiter's formula (4.1) were determined empirically and justified heuristically. Firstly, according to the authors' knowledge, the empirical constant, α is introduced without a strong justification. Secondly, the assumption that vortices propagate at a universal averaged speed ratio of $\kappa = 0.58$ should deserve further scrutiny. In fact, as shown in Section 3.4, the averaged vortex convection velocity is estimated to be $\kappa = 0.386$, which is an underestimation of the value suggested by Rossiter (1964) and the use of $\alpha = 0$ seems to improve the prediction as demonstrated by several deep cavity investigations (Forestier *et al.* 2003; Larchevêque *et al.* 2003; El Hassan *et al.* 2007; Ma *et al.* 2009). Therefore, it is speculated that the necessity of reducing α is likely to be caused by the overestimation of the vortex convection velocity. As such, the idea of the empirical constant, α and the universal convection velocity ratio, κ that are dependent upon neither geometric property nor the incoming flow characteristic, may be inadequate to explain the feedback mechanism associated with deep cavity flows.

In contrast to shallow cavities, however, the depthwise dimension of deeper cavities dictates the acoustic resonant frequency. East (1966) realised this with his experiments and proposed an empirical formula to predict the depthwise resonant frequency of deep cavities. By considering the depthwise characteristic length of the deep cavities, the formula is given by,

$$\frac{f_1 D}{a_\infty} = \frac{a}{[1 + b(D/L)^c]}, \quad (4.2)$$

where $a = 0.25$, $b = 0.65$ and $c = 0.75$ were determined empirically from his experiments. East highlighted that the fundamental frequency of deep cavities is highly sensitive to the aspect ratio of the cavity, which is not considered by Rossiter's formula. On the ground of this, the results from past investigations on deep rectangular cavities were gathered for comparison with the current numerical result to reconfirm this observation.

Accordingly, figure 17(a) shows the majority of the resonant frequencies of deep cavities reside in the region close to the frequencies predicted by the classical one-quarter wave theory, with an acoustic pressure node at the cavity base and a pressure antinode near the cavity opening. This indicates that the deep cavities' resonant frequency is

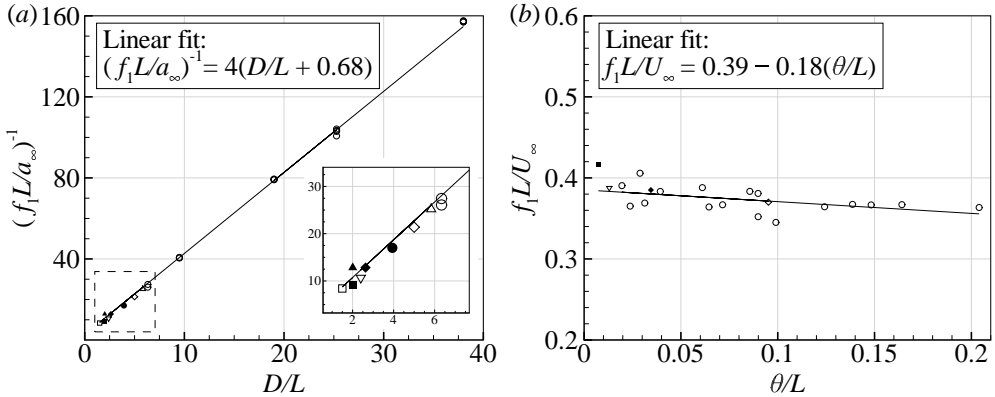


FIGURE 17. (a) Relationship between the period of fundamental resonant frequency and the aspect ratio of the cavities; and, (b) the relationship of Strouhal number with the momentum thickness of the approaching boundary layer. The symbols indicate the results from: (■) Ahuja & Mendoza (1995); (□) Block (1976); (▲) L. Cattafesta *et al.* (1997); (△) Erickson & Durgin (1987); (▽) Forestier *et al.* (2003); (◆) Current LES; (◇) El Hassan *et al.* (2007); (●) McGrath & Olinger (1996); (○) Yang *et al.* (2009). Note that some of the results were excluded in (b) due to the lack of boundary layer information.

primarily determined by the depth and less influenced by the streamwise characteristic length. Therefore, by a linear fit of the experiment and the current numerical results, the depthwise fundamental frequency, f_1 , of deep cavities is found to be,

$$\frac{f_1 L}{a_\infty} = \frac{1}{D/L + \epsilon_1}, \quad (4.3)$$

where $\epsilon_1 = 0.68$, accounts for an end correction as obtained in figure 17(a). Subsequently, figure 17(b) shows the decrement of Strouhal number with the increased non-dimensional momentum thickness, which can be attributed to a reduced vortex convection speed due to the thickened boundary layer thickness according to Yamouni *et al.* (2013). By a linear fit of the experiment and the current numerical results, the relationship between the Strouhal number of the first hydrodynamic mode, $f_1 L / U_\infty$ and the non-dimensional momentum thickness, θ/L can be related by,

$$\frac{f_1 L}{U_\infty} = a_1 + b_1 \theta/L. \quad (4.4)$$

where $a_1 = 0.39$ and $b_1 = -0.18$ are obtained from figure 17(b). Accordingly, the conversion of the hydrodynamic energy to the acoustic counterpart will be maximum when the Rossiter's feedback mechanism is in-phase with the depthwise acoustic resonance (East 1966; Yang *et al.* 2009; Yamouni *et al.* 2013). Therefore, this criterion is met when the first hydrodynamic mode matches with a depthwise acoustic mode of the cavity. In other words, a maximum oscillation will be produced when the (hydrodynamic) frequency predicted in (4.4) coincides with (acoustic) frequency predicted in (4.3). Consequently, the critical turbulent freestream velocity at which the first hydrodynamic mode occurs concurrently with the first depthwise acoustic mode is obtained in non-dimensional form by dividing (4.3) with (4.4):

$$M_{\infty,cr} = \frac{1}{(4D/L + \epsilon_1)(a_1 + b_1 \theta/L)}, \quad (4.5)$$

with the aspect ratio, D/L and the upstream turbulent momentum thickness, θ/L

correspond to a single value of critical freestream Mach number. Previous investigations on deep cavity configuration have suggested that the first hydrodynamic mode often provides the most intense noise source (Erickson *et al.* 1986; Ziada & Bühlmann 1992; Kriesels *et al.* 1995; Arthurs & Ziada 2009). Appropriately, in situations where $\theta/L \leq 0.2$ is satisfied and the fundamental acoustic resonance is of interest, the prediction from (4.5) is of practical importance due to the simplicity of the formula to predict the critical turbulent freestream velocity. This is particularly useful in minimising the future occurrence of flow-induced resonance in the early development stage.

5. Concluding remarks

A detailed understanding of the physical mechanism of the aerodynamic noise generation of deep cavity in acoustic resonance with an aspect ratio of $D/L = 2.632$ at $Re_\infty = 174,594$ subjected to an incoming turbulent boundary layer at a freestream velocity of $M_\infty = 0.2$ has been achieved by using a high-order accurate large-eddy simulation. The first part of the investigation concerns pressure fluctuations around the cavity and are separated into the hydrodynamic and the acoustic components using Doak's momentum potential theory (MPT). Accordingly, the decomposed acoustic pressure fluctuation contour at each time interval illustrates the instant alteration of acoustic pressure fluctuation inside the cavity with the synchronised shear layer oscillation across the cavity opening. Subsequently, the Fourier transform is performed on the pressure fluctuation, and the respective magnitude shows the presence of three dominant tonal frequencies. The peak frequency that corresponds to the first acoustic mode bears a close resemblance to a one-quarter wave inside the cavity, thus implying the fundamental acoustic resonance. The transition to higher acoustic mode is apparent at higher harmonics, despite the magnitudes being significantly weaker than the fundamental frequency. Besides, the decomposed hydrodynamic pressure field's contours highlight the formation of a large-scale low-pressure region from the small-scale low-pressure spots near the upstream corner. The impingement of the former exerts a low hydrodynamic pressure fluctuation onto the downstream corner. Subsequently, the stagnated and separated flows ensued from the shear layer-wall interaction is revealed by the high and low hydrodynamic pressure fluctuation near the downstream wall, respectively.

The second part of the study analyses the hydrodynamic flow field near the cavity opening region in detail. The Fourier transformed hydrodynamic pressure fluctuation near the cavity opening indicates the number of vortices (e.g. hydrodynamic mode) increases following the passage frequencies, and the respective streamwise amplification at each tonal frequency across the cavity opening through the coherent vortex formation is visualised. The emergence of small-scale vortices near the upstream corner and the subsequent vortex coalescence into a large-scale vortex are captured by the time evolution of the Q -criterion. The development of the large-scale vortex and the shear layer's undulation, accompanied by the alteration of the vorticity and strain-rate fields near the downstream corner is essential in the aerodynamic noise generation. Furthermore, the formation of the separation region caused by the flow reversal and the mass exchange rate across the cavity opening could also help describe the aerodynamic noise generation.

The current work extensively studied the fluid-acoustic coupling mechanism between the separated shear layer oscillation near the upstream corner and the acoustic resonance in the cavity. It is found that the vertical velocity fluctuation is mostly in-phase with the acoustic forcing near the upstream corner at the fundamental and second harmonic frequencies. In both cases, linear amplification of vertical velocity fluctuation is observed under the acoustic reinforcement. In contrast, the out-of-phase relationship observed

in the first harmonic case can be used to explain the exponential amplification of hydrodynamic disturbance in the free shear layer oscillation. It is observed that the nonlinear interactions between the vertical velocity fluctuation at higher harmonics with the fundamental acoustic resonance are plausible. Thus, this may indicate the birth of higher harmonics may result from the “modulated instability wave” by the strong acoustic forcing at the fundamental frequency as suggested by Kaykayoglu & Rockwell (1986).

The last part of the study is dedicated to the estimation of the averaged convection speed of the coherent vortices across the cavity opening, which is determined by calculating the phase variation of the Q -criterion from upstream to the downstream corner of the cavity. The phase variations at the tonal frequencies satisfied the criteria for the onset of self-sustained oscillations at first, second and third hydrodynamic modes respectively. By utilising the linear dispersion relationship, this gives an average speed ratio of $k = U_c/U_\infty = 0.386$, which is reasonably close to the values published in previous investigations concerning deep cavities. Finally, a semi-empirical model to predict the critical freestream velocity at which a strong fluid-acoustic coupling occurs as a function of cavity geometry and inflow boundary-layer property is proposed. This is particularly useful in minimising the future occurrence of flow-induced resonance in the early development stage.

Acknowledgement

We would like to acknowledge the financial support provided by Rolls-Royce through the Rolls-Royce University Technology Centre (UTC) for Gas Turbine Noise in the Institute of Sound and Vibration Research. We would also like to thank Dr. Christoph Richter and Dr. Jayanth Venkatesh at Rolls-Royce for their technical comments and suggestions. The authors acknowledge the use of IRIDIS-5 High Performance Computing Facility and associated support services at the University of Southampton in the completion of this work.

Declaration of interests

The authors report no conflict of interest.

REFERENCES

- AHUJA, KK & MENDOZA, JEFF 1995 Effects of cavity dimensions, boundary layer, and temperature on cavity noise with emphasis on benchmark data to validate computational aeroacoustic codes .
- ALEKSENTSEV, AA, SAZHENKOV, AN & SUKHININ, SV 2016 Acoustic resonance phenomena in air bleed channels in aviation engines. *Journal of Applied Mechanics and Technical Physics* **57** (6), 971–978.
- ARTHURS, D & ZIADA, S 2009 Flow-excited acoustic resonances of coaxial side-branches in an annular duct. *Journal of Fluids and Structures* **25** (1), 42–59.
- ASHCROFT, GRAHAM & ZHANG, XIN 2005 Vortical structures over rectangular cavities at low speed. *Physics of Fluids* **17** (1), 015104.
- BILANIN, ALAN J. & COVERT, EUGENE E. 1973 Estimation of possible excitation frequencies for shallow rectangular cavities. *AIAA Journal* **11** (3), 347–351.
- BLOCK, PATRICIA JW 1976 Noise response of cavities of varying dimensions at subsonic speeds .
- BRADSHAW, P. 1981 A note on poisson’s equation for pressure in a turbulent flow. *Physics of Fluids* **24** (4), 777.
- BRAVO, RAFAEL, ZIADA, SAMIR & DOKAINISH, MOHAMED 2005 Aeroacoustic response of

- an annular duct with coaxial closed side branches. In *11th AIAA/CEAS Aeroacoustics Conference*, p. 3019.
- BRUGGEMAN, J.C. 1987 Flow induced pulsations in pipe systems. PhD thesis, Department of Applied Physics.
- BRUGGEMAN, J.C., HIRSCHBERG, A., VAN DONGEN, MEH, WIJNANDS, APJ & GORTER, J 1991 Self-sustained aero-acoustic pulsations in gas transport systems: experimental study of the influence of closed side branches. *Journal of sound and vibration* **150** (3), 371–393.
- BRUGGEMAN, J. C., HIRSCHBERG, A., VAN DONGEN, M. E. H., WIJNANDS, A. P. J. & GORTER, J. 1989 Flow induced pulsations in gas transport systems: Analysis of the influence of closed side branches. *Journal of Fluids Engineering* **111** (4), 484–491.
- COFFMAN, J. T. & BERNSTEIN, M. D. 1980 Failure of safety valves due to flow-induced vibration. *Journal of Pressure Vessel Technology* **102** (1), 112–118.
- CURLE, N. 1955 The influence of solid boundaries upon aerodynamics sound. *Proc. R. Soc. Lond. A* **231**, 505–514.
- DAI, XIWEN, JING, XIAODONG & SUN, XIAOFENG 2015 Flow-excited acoustic resonance of a helmholtz resonator: Discrete vortex model compared to experiments. *Physics of Fluids* **27** (5), 057102.
- DOAK, P.E. 1989 Momentum potential theory of energy flux carried by momentum fluctuations. *Journal of Sound and Vibration* **131** (1), 67–90.
- EAST, L.F. 1966 Aerodynamically induced resonance in rectangular cavities. *Journal of Sound and Vibration* **3** (3), 277–287.
- EL HASSAN, M, KEIRSBULCK, L & LABRAGA, L 2007 Aero-acoustic oscillations inside large deep cavities at low sub-sonic speeds. *Journal of Fluids Engineering* **131** (1).
- ELDER, S. A. 1978 Self-excited depth-mode resonance for a wall-mounted cavity in turbulent flow. *The Journal of the Acoustical Society of America* **64** (3), 877.
- ELDER, SAMUEL A. 1980 Forced oscillations of a separated shear layer with application to cavity flow-tone effects. *The Journal of the Acoustical Society of America* **67** (3), 774–781.
- ERICKSON, D. & DURGIN, W. 1987 Tone generation by flow past deep wall cavities. In *25th AIAA Aerospace Sciences Meeting*. American Institute of Aeronautics and Astronautics.
- ERICKSON, DD, DURGIN, WILLIAM W, MAGUIRE III, CF & MOELLER, MJ 1986 Shear layer coupling with side-branch resonators. In *ASME Winter Annual Meeting: Anaheim, CA*, p. 43.
- FORESTIER, NICOLAS, JACQUIN, LAURENT & GEFFROY, PHILIPPE 2003 The mixing layer over a deep cavity at high-subsonic speed. *Journal of Fluid Mechanics* **475**, 101–145.
- GALBALLY, DAVID, GARCÍA, GONZALO, HERNANDO, JESÚS, DE DIOS SÁNCHEZ, JUAN & BARRAL, MARCOS 2015 Analysis of pressure oscillations and safety relief valve vibrations in the main steam system of a boiling water reactor. *Nuclear Engineering and Design* **293**, 258–271.
- GARMANN, DANIEL J., VISBAL, MIGUEL R. & ORKWIS, PAUL D. 2012 Comparative study of implicit and subgrid-scale model large-eddy simulation techniques for low-reynolds number airfoil applications. *International Journal for Numerical Methods in Fluids* **71** (12), 1546–1565.
- GOLDSTEIN, M. E. 1976 *Aeroacoustics*. McGraw-Hill.
- GRAF, H.R. & DURGIN, W.W. 1993 Measurement of the nonsteady flow field in the opening of a resonating cavity excited by grazing flow. *Journal of Fluids and Structures* **7** (4), 387–400.
- GUTMARK, EPHRAIM & HO, CHIH-MING 1983 Preferred modes and the spreading rates of jets. *The Physics of fluids* **26** (10), 2932–2938.
- HELLER, HANNO H, HOLMES, DG & COVERT, EUGENE E 1971 Flow-induced pressure oscillations in shallow cavities. *Journal of sound and Vibration* **18** (4), 545–553.
- HO, CHIH-MING & HUANG, LEIN-SAING 1982 Subharmonics and vortex merging in mixing layers. *Journal of Fluid Mechanics* **119**, 443–473.
- HO, C-M & HUERRE, PATRICK 1984 Perturbed free shear layers. *AnRfM* **16**, 365–424.
- HO, CHIH-MING & NOSSEIR, NAGY S. 1981 Dynamics of an impinging jet. part 1. the feedback phenomenon. *Journal of Fluid Mechanics* **105** (-1), 119.
- HOWE, M.S. 2003 *Theory of Vortex Sound*. Cambridge University Press.

- KARAMCHETI, K 1955 Acoustic radiation from two-dimensional rectangular cut-outs in aerodynamic surfaces. *NACA TN* **3487**.
- KAYKAYOGLU, RUHI & ROCKWELL, DONALD 1986 Unstable jet–edge interaction part 2: Multiple frequency pressure fields. *Journal of Fluid Mechanics* **169**, 151–172.
- KIM, J. W. 2007 Optimised boundary compact finite difference schemes for computational aeroacoustics. *J. Comput. Phys.* **225**, 995–1019.
- KIM, J. W. 2010 High-order compact filters with variable cut-off wavenumber and stable boundary treatment. *Comput. Fluids* **39**, 1168–1182.
- KIM, J. W. 2013 Quasi-disjoint pentadiagonal matrix systems for the parallelization of compact finite-difference schemes and filters. *J. Comput. Phys.* **241**, 168–194.
- KIM, J. W., LAU, A. S. H. & SANDHAM, N. D. 2010*a* CAA boundary conditions for airfoil noise due to high-frequency gusts. *Proc. Eng.* **6**, 244–253.
- KIM, J. W., LAU, A. S. H. & SANDHAM, N. D. 2010*b* Proposed boundary conditions for gust-airfoil interaction noise. *AIAA J.* **48** (11), 2705–2709.
- KIM, J. W. & LEE, D. J. 2000 Generalized characteristic boundary conditions for computational aeroacoustics. *AIAA J.* **38** (11), 2040–2049.
- KIM, J. W. & LEE, D. J. 2004 Generalized characteristic boundary conditions for computational aeroacoustics, part 2. *AIAA J.* **42** (1), 47–55.
- KIM, J. W. & MORRIS, P. J. 2002 Computation of subsonic inviscid flow past a cone using high-order schemes. *AIAA J.* **40** (10), 1961–1968.
- KNISELY, C. & ROCKWELL, D. 1982 Self-sustained low-frequency components in an impinging shear layer. *Journal of Fluid Mechanics* **116**, 157–186.
- KOCH, W. 2005 Acoustic resonances in rectangular open cavities. *AIAA Journal* **43** (11), 2342–2349.
- KRIESELS, PC, PETERS, MCAM, HIRSCHBERG, A, WIJNANDS, APJ, IAFRATI, A, RICCARDI, G, PIVA, R & BRUGGEMAN, JC 1995 High amplitude vortex-induced pulsations in a gas transport system. *Journal of Sound and Vibration* **184** (2), 343–368.
- L. CATTAFESTA, III, GARG, S., CHOUDHARI, M., LI, F., L. CATTAFESTA, III, GARG, S., CHOUDHARI, M. & LI, F. 1997 Active control of flow-induced cavity resonance. In *28th Fluid Dynamics Conference*. American Institute of Aeronautics and Astronautics.
- LARCHEVÊQUE, LIONEL, SAGAUT, PIERRE, MARY, IVAN, LABBÉ, ODILE & COMTE, PIERRE 2003 Large-eddy simulation of a compressible flow past a deep cavity. *Physics of Fluids* **15** (1), 193–210.
- LEE, MYOUNGKYU & MOSER, ROBERT D. 2015 Direct numerical simulation of turbulent channel flow up to $Re_\tau \approx 5200$. *Journal of Fluid Mechanics* **774**, 395–415.
- MA, RUOLONG, SLABOCH, PAUL E & MORRIS, SCOTT C 2009 Fluid mechanics of the flow-excited helmholtz resonator. *Journal of Fluid Mechanics* **623**, 1.
- MCGRATH, STEPHEN F. & OLINGER, DAVID J. 1996 Control of pressure oscillations in deep cavities excited by grazing flow. *Journal of Aircraft* **33** (1), 29–36.
- MICHALKE, A. 1972 The instability of free shear layers. *Progress in Aerospace Sciences* **12**, 213–216.
- NA, T. Y. & LU, Y. P. 1973 Turbulent flow development characteristics in channel inlets. *Applied Scientific Research* **27** (1), 425–439.
- NAGUIB, AHMED M. & KOOCHESFAHANI, MANOOCHHEHR M. 2004 On wall-pressure sources associated with the unsteady separation in a vortex-ring/wall interaction. *Physics of Fluids* **16** (7), 2613–2622.
- NELSON, PA, HALLIWELL, NA & DOAK, PE 1983 Fluid dynamics of a flow excited resonance, part ii: Flow acoustic interaction. *Journal of sound and vibration* **91** (3), 375–402.
- PERROT-MINOT, C., MIGNOT, E., PERKINS, R., LOPEZ, D. & RIVIERE, N. 2020 Vortex shedding frequency in open-channel lateral cavity. *Journal of Fluid Mechanics* **892**.
- PETERS, MARINUS CAROLUS ADRIANUS MARIA 1993 *Aeroacoustic sources in internal flows*. Eindhoven University of Technology.
- PLUMBLEE, HE, GIBSON, JS & LASSITER, LW 1962 A theoretical and experimental investigation of the acoustic response of cavities in an aerodynamic flow. *Tech. Rep.*. LOCKHEED AIRCRAFT CORP MARIETTA GA.
- RIENSTRA, SJOERD W 2015 Fundamentals of duct acoustics. *Von Karman Institute Lecture Notes* .

- ROCKWELL, DONALD 1983 Oscillations of impinging shear layers. *AIAA Journal* **21** (5), 645–664.
- ROCKWELL, D. & NAUDASCHER, E. 1978 Review—self-sustaining oscillations of flow past cavities. *Journal of Fluids Engineering* **100** (2), 152–165.
- ROCKWELL, D & NAUDASCHER, E 1979 Self-sustained oscillations of impinging free shear layers. *Annual Review of Fluid Mechanics* **11** (1), 67–94.
- ROSSITER, JE 1964 Wind tunnel experiments on the flow over rectangular cavities at subsonic and transonic speeds. *Tech. Rep.*. Ministry of Aviation; Royal Aircraft Establishment; RAE Farnborough.
- ROWLEY, CLARENCE W, COLONIUS, TIM & BASU, AMIT J 2002 On self-sustained oscillations in two-dimensional compressible flow over rectangular cavities. *Journal of Fluid Mechanics* **455**, 315–346.
- SPALDING, D. B. 1961 A single formula for the “law of the wall”. *Journal of Applied Mechanics* **28** (3), 455–458.
- TAM, C.K.W. 1976 The acoustic modes of a two-dimensional rectangular cavity. *Journal of Sound and Vibration* **49** (3), 353–364.
- TAM, CHRISTOPHER K. W. & BLOCK, PATRICIA J. W. 1978 On the tones and pressure oscillations induced by flow over rectangular cavities. *Journal of Fluid Mechanics* **89** (2), 373–399.
- TANG, Y.-P. & ROCKWELL, D. 1983 Instantaneous pressure fields at a corner associated with vortex impingement. *Journal of Fluid Mechanics* **126**, 187–204.
- THANGAMANI, VARUN, KNOWLES, KEVIN & SADDINGTON, ALISTAIR 2012 The effects of scaling on high subsonic cavity flow oscillations and control. In *18th AIAA/CEAS Aeroacoustics Conference (33rd AIAA Aeroacoustics Conference)*. American Institute of Aeronautics and Astronautics.
- TONON, DEVIS, HIRSCHBERG, AVRAHAM, GOLLIARD, JOACHIM & ZIADA, SAMIR 2011 Aeroacoustics of pipe systems with closed branches. *International Journal of Aeroacoustics* **10** (2-3), 201–275.
- TRACY, MAUREEN B 1997 *Cavity unsteady-pressure measurements at subsonic and transonic speeds*, , vol. 3669. NASA, Langley Research Center.
- TUNA, B. A. & ROCKWELL, D. 2014 Self-sustained oscillations of shallow flow past sequential cavities. *Journal of Fluid Mechanics* **758**, 655–685.
- UNNIKRISHNAN, S & GAITONDE, DATTA V 2016 Acoustic, hydrodynamic and thermal modes in a supersonic cold jet. *Journal of Fluid Mechanics* **800**, 387–432.
- UNNIKRISHNAN, S. & GAITONDE, DATTA V. 2020 A pressure decomposition framework for aeroacoustic analysis of turbulent jets. *European Journal of Mechanics - B/Fluids* **81**, 41–61.
- WAGNER, JUSTIN L., BERESH, STEVEN J., CASPER, KATYA M., DEMAURO, EDWARD P. & ARUNAJATESAN, SRINIVASAN 2017 Resonance dynamics in compressible cavity flows using time-resolved velocity and surface pressure fields. *Journal of Fluid Mechanics* **830**, 494–527.
- WHITE, FM 1991 Viscous fluid flow 2nd edition mcgraw-hill. *New York* .
- YAMOUNI, SAMI, SIPP, DENIS & JACQUIN, LAURENT 2013 Interaction between feedback aeroacoustic and acoustic resonance mechanisms in a cavity flow: a global stability analysis. *Journal of Fluid Mechanics* **717**, 134–165.
- YANG, Y., ROCKWELL, D., CODY, K. LAI-FOOK & POLLACK, M. 2009 Generation of tones due to flow past a deep cavity: Effect of streamwise length. *Journal of Fluids and Structures* **25** (2), 364–388.
- ZIADA, S 1994 A flow visualization study of flow-acoustic coupling at the mouth of a resonant side-branch. *Journal of Fluids and Structures* **8** (4), 391–416.
- ZIADA, SAMIR 2010 Flow-excited acoustic resonance in industry. *Journal of Pressure Vessel Technology* **132** (1).
- ZIADA, S & BÜHLMANN, ET 1992 Self-excited resonances of two side-branches in close proximity. *Journal of Fluids and Structures* **6** (5), 583–601.
- ZIADA, SAMIR & LAFON, PHILIPPE 2014 Flow-excited acoustic resonance excitation mechanism, design guidelines, and counter measures. *Applied Mechanics Reviews* **66** (1).

ZIADA, S, OENGÖREN, A & VOGEL, A 2002 Acoustic resonance in the inlet scroll of a turbo-compressor. *Journal of Fluids and structures* **16** (3), 361–373.