

ORIGINAL ARTICLE

Wavevector Selective Metasurfaces and Tunnel Vision Filters

Vassili A Fedotov¹, Jan Wallauer², Markus Walther², Mauro Perino^{1,3}, Nikitas Papasimakis¹ and Nikolay I Zheludev^{1,4}

Metasurfaces offer unprecedented flexibility in the design and control of light propagation, replacing bulk optical components and exhibiting exotic optical effects. One of the basic properties of the metasurfaces, which renders them as frequency selective surfaces, is the ability to transmit or reflect radiation within a narrow spectral band that can be engineered on demand. Here we introduce and demonstrate experimentally in the THz domain the concept of wavevector selective surfaces – metasurfaces transparent only within a narrow range of light propagation directions operating effectively as tunnel vision filters. Practical implementations of the new concept include applications in wavefront manipulation, observational instruments, vision and free-space communication in light-scattering environments.

Light: Science & Applications (2015) 4, e306; doi:10.1038/lssa.2015.79; published online xx xx xx

Keywords: flat optics; metafilms; metasurfaces; planar metamaterials; wavefront manipulation

INTRODUCTION

Metasurfaces (also known as planar metamaterials or metafilms) are a special low-dimensional class of artificially structured media. It is represented by thin metal films and surfaces periodically patterned on a sub-wavelength scale, which can be readily fabricated using the existing planar technologies. Apart from their spectral selectivity¹ metasurfaces have demonstrated intriguing electromagnetic effects such as asymmetric transmission^{2,3} and optical activity without structural chirality⁴. They can exhibit resonant dispersion mimicking electromagnetically induced transparency and slow light phenomenon^{5,6,7}, be invisible⁸, efficiently convert polarization^{9,10,11}, or perfectly absorb radiation^{12,13}. Metasurfaces with gradient structuring anomalously reflect and refract light^{10,14,15} and can act as lenses, wave-plates, and diffraction gratings^{16,17,18,19}. Planar metamaterials are also able to enhance the light–matter interaction facilitating sensing²⁰, energy harvesting²¹, and coherent radiation^{22,23}.

The functionality of the most common types of planar metamaterials is determined by the individual resonant response of their basic structural elements – metamolecules, which are only weakly coupled to each other. When electromagnetic coupling between the metamolecules is strong²⁴ the relative phase of their excitation becomes important and the resulting spectral response is no longer determined by the individual resonances of the metamolecules. The metamaterial spectrum will be shaped by the collective, spatially coherent modes of metamolecular excitations that engage a large ensemble of metamolecules²⁵. The introduction of structural disorder in such ensemble reduces the degree of coherency and leads to the weakening and broadening of its collective resonant response, which might be seen to vanish

at even moderate levels of the disorder^{24,26}. Strong inter-metamolecular coupling is also responsible for the ‘size effect’ where the resonant transmission band of a metamaterial narrows with increasing size of the metamaterial sample²⁷.

In this paper we show that strong inter-metamolecular coupling can lead to a new phenomenon of ‘tunnel vision’, which renders a coherent metasurface as transparent within a very narrow range of light propagation directions. This effect is accompanied by ‘rectification’ of incident wavefronts, when initially spherical waves emerge as planar while traversing such metasurface in the absence of any spatial phase modulation or adaptive feedback²⁸. The transmitted wavefronts appear parallel to the plane of the metamaterial and the effect does not depend on the curvature of the incident wavefronts.

As illustrated in Figure 1, such response is fundamentally different from that of conventional convex lenses and recently demonstrated metasurface-based lenses^{16,19}. Indeed, a lens introduces a spatially dependent delay in the optical path, which compensates the curvature of the incident spherical wavefront if its source is located in the ‘focal spot’ of the lens. In a convex glass lens, for example, the spatial variation of optical delay is achieved by gradually reducing the thickness of the lens towards its edges (see Figure 1a). In a metasurface-based lens the same is accomplished by changing the size and/or shape of its metamolecules: the resulting position-dependent phase lag for light scattered by the metamolecules mimics spatial variation of optical delay in the glass lens (see Figure 1b). For spherical waves originating at its focal point, the lens converts the entire range of incident wavevectors into a much narrower range that converges around the optical axis of the lens.

¹Optoelectronics Research Centre and Centre for Photonic Metamaterials, University of Southampton, Southampton, SO17 1BJ, UK; ²Department of Molecular and Optical Physics, University of Freiburg, D-79104 Freiburg, Germany; ³Department of Information Engineering, University of Padova, Padova, Italy and ⁴Centre for Disruptive Photonic Technologies, Nanyang Technological University, 637371 Singapore, Singapore.
Correspondence: Vassili A. Fedotov (vaf@orc.soton.ac.uk)

Received 2 December 2014; revised 30 March 2015; accepted 30 March 2015; accepted article preview online 31 March 2015

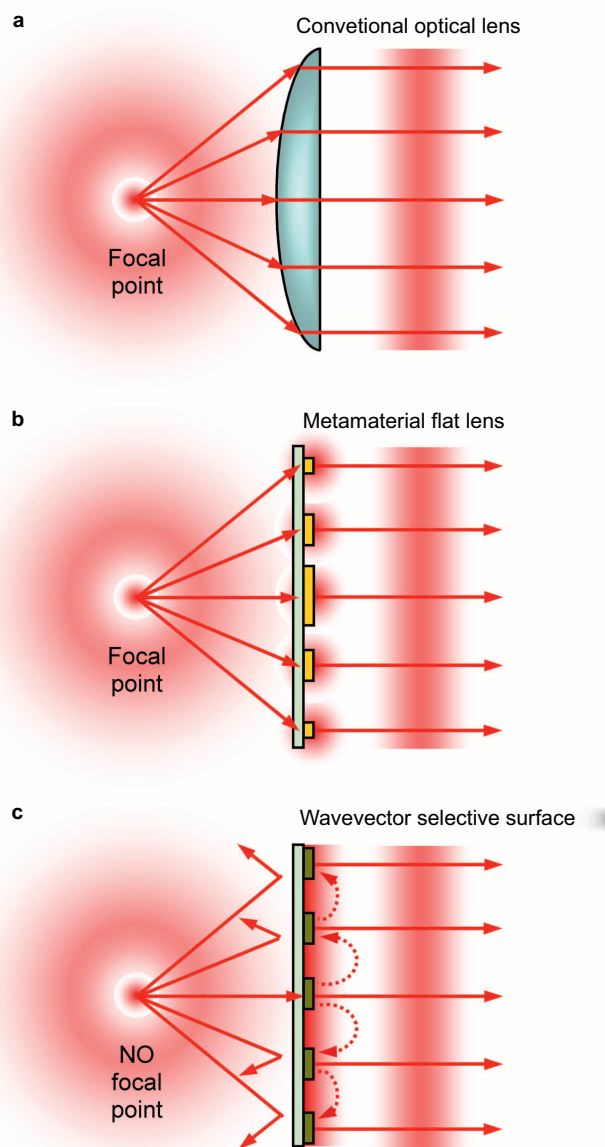


Figure 1. Three ways of producing planar wavefronts with a point light source.

The ‘tunnel vision’ effect can be understood as wavevector filtering, which occurs in a narrow transparency window of the metasurface corresponding to the collective resonance of its strongly coupled metamolecules. Indeed, in a regular planar array of identical metamolecules with the sub-wavelength period d the coupling is strongest when the metamolecules are excited by a normally incident plane wave, i.e. they all oscillate in-phase. Any plane wave with its k -vector deviating from the array’s normal (so that $k_{\parallel} \neq 0$) introduces a phase delay in the excitation of the metamolecules that linearly varies along the metasurface. The resulting de-phasing reduces the strength of coupling through the factor $\cos(k_{\parallel} d)$ and hence changes the energy of the collective mode (see Supplementary Information). Consequently, the transparency window shifts to a different frequency and the metasurface becomes opaque. Operating at the frequency of its collective resonance the structure therefore acts as a wavevector selective surface (WSS): it admits only those partial plane waves whose k -vectors are

parallel (or nearly parallel) to its normal, while all other waves are reflected back and/or absorbed (see Figure 1c).

MATERIALS AND METHODS

Modeling

The propagation of spherical wavefronts through a wavevector selective surface was simulated using 3D Maxwell’s equations solver of the COMSOL Multiphysics simulation package 3.5a. The metasurface was modeled as a 14×14 array of asymmetrically split rings (ASR) with the period $d = 565 \mu\text{m}$. The rings had the radius $r = 245 \mu\text{m}$ and were split into wire sections 140° and 160° long separated by equal gaps. The wire sections had the width of $40 \mu\text{m}$ and were modeled as perfect electric conductors. The thickness of the supporting substrate was $120 \mu\text{m}$ and its permittivity was assumed to be $\epsilon = 2.2$. The size of the simulation domain allocated for the transmitted wavefronts was $7910 \times 7910 \times 7910 \mu\text{m}$.

Experiment

The metamaterial sample had been fabricated by etching a $9\text{-}\mu\text{m}$ -thick copper layer covering one side of a $120\text{-}\mu\text{m}$ -thick low-loss teflon substrate and closely resembled the modeled split-ring array both in terms of its size and design parameters. The transmitted wavefronts were visualized in $0.12\text{--}0.23 \text{ THz}$ range of frequencies using state-of-the-art THz-field imaging technique²⁹, which enabled mapping of electric-field component of the propagating waves with the spatial resolution of $160 \mu\text{m}$ and frequency resolution of 0.01 THz . The spherical waves were produced by illuminating a pinhole placed $500 \mu\text{m}$ away from the sample with a focused THz beam polarized parallel to the split of the rings. The diameter of the pinhole was $1750 \mu\text{m}$, which ensured adequate signal-to-noise ratio for the wavefront imaging at low frequencies with the signs of diffraction visible only above $\sim 0.2 \text{ THz}$.

RESULTS AND DISCUSSION

As an example of WSS we consider here a planar metamaterial based on ASR, a regular array of identical metamolecules formed by pairs of metallic arcs of different length (see inset to Figure 2). For normally incident plane waves with E-field being parallel to the split its transmission spectrum features a narrow asymmetric pass-band with a sharp roll-off (Fano resonance), which in our case is centered around $\nu_0 = 0.165 \text{ THz}$ (see Figure 2a). This spectral feature corresponds to the resonant excitation of anti-symmetric charge-current mode, the so-called trapped or sub-radiant mode^{30,31}, when charges q and currents j induced in the opposite arcs of each ASR-metamolecule oscillate with equal amplitudes but opposite phases (see inset to Figure 2). Such mode can be represented by a combination of an oscillating magnetic dipole with its moment being orthogonal to the metamaterial plane $m = (0, 0, m_z)$, and an electric quadrupole Q characterized by two non-zero in-plane components $Q_{xy} = Q_{yx}$. Being arranged in a 2D-lattice with a sub-wavelength unit cell these multipoles cannot contribute to the far-field scattering of the array when they oscillate in-phase: coherent superposition of their fields results in electromagnetic modes with the characteristic wavenumbers larger than $2\pi/\lambda_0$, and thus the multipole radiation by the array is trapped in the near-field zone. The absence of scattering in the far-field zone renders the metamaterial transparent, while the accumulation of energy in the spatially coherent surface waves ensure strong inter-metamolecular coupling²⁷.

For the ASR-metasurface, the effect of wavevector filtering is particularly pronounced near 0.165 THz , at the sharp edge of its transparency band where a small blue shift of the band translates into a strong reduction of the metamaterial transmission (see Figure 2a).

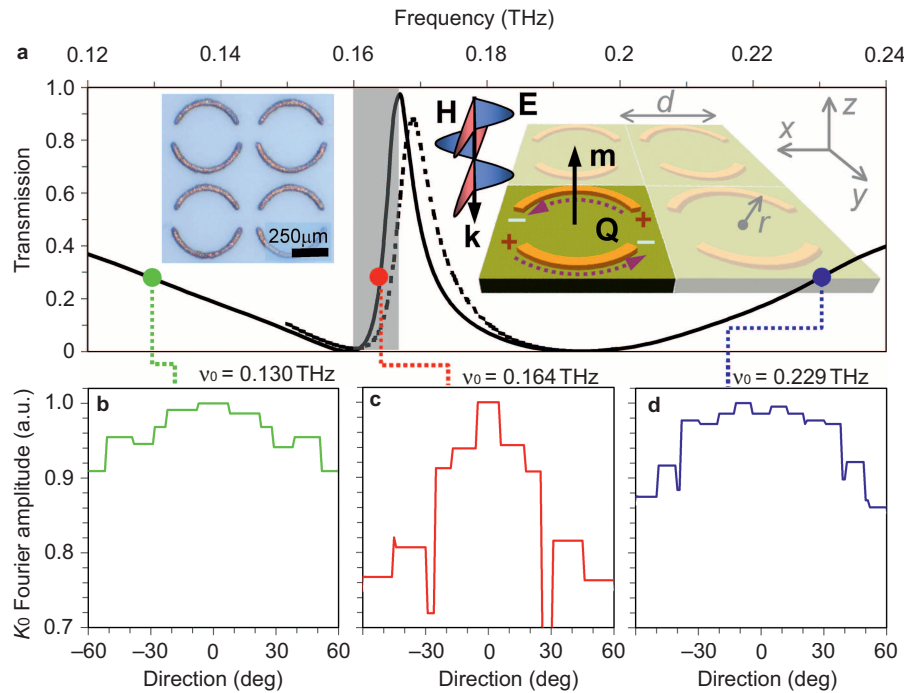


Figure 2. THz wavevector selective surface. **(a)** – WSS transmission spectrum calculated for plane-wave illumination at normal incidence (solid curve), and 20° incidence and TM polarization (dashed curve). Gray shading indicates the slope of the trapped-mode resonance. Left inset shows a schematic of the WSS, a planar array of ASR; right inset shows a fragment of the fabricated WSS sample. **(b)**, **(c)** & **(d)** – Angular spectra of the transmitted wavevectors calculated for spherical-wave illumination at 0.130, 0.164, and 0.229 THz, respectively.

Such a shift corresponds to an increase of the trapped-mode's energy and therefore should result from the weakening of attractive inter-metamolecular coupling. In the array of ASR-metamolecules it is mediated by electric quadrupole–quadrupole interaction, and at oblique incidence it is affected by TM-component of the plane wave (see Supplementary Information).

We first demonstrated the effect of wavevector filtering numerically, by simulating the propagation of spherical waves with a large wavefront curvature through the ASR-metasurface (see Figure 3a–3c). The waves were produced by an electromagnetic point source placed close to the metasurface, at the distance equal to just one period of the ASR-array, d , and polarized parallel to the split of the rings. The transmitted waves are visualized through the spatial variation of their phase and are presented for three characteristic frequencies ν_0 (as indicated in Figure 2a), which correspond to identical levels of transmission at the edges of the stop-band ($\nu_0 = 0.130$ THz and 0.229 THz) and at the pass-band ($\nu_0 = 0.164$ THz). As evident from Figure 3a and 3c, the curvature of the wavefronts at 0.130 and 0.229 THz remains practically unperturbed upon propagation through the metasurface. The situation changes markedly at the trapped-mode resonance, where the transmitted wavefront emerges nearly planar signifying thus the regime of wavevector filtering (see Figure 3b).

To characterize the response of ASR-metasurface in terms of the transmitted k -vectors, i.e. partial plane-wave components, we plotted the spatial-frequency spectrum of the transmitted wavefront (see Figure 3d–3f). A perfectly spherical wave would have been represented by a circle of the radius $k_0 = 2\pi \nu_0/c$ corresponding to the fundamental spatial frequency, as indicated by the dotted circles in Figure 3d–3f. Clearly, at $\nu_0 = 0.130$ THz and $\nu_0 = 0.229$ THz the spatial-frequency spectra have the form of partial concentric circles. The inner circle has

the radius of k_0 and corresponds to the fundamental spatial frequency of the wavefront pattern. The outer circles represent higher harmonics $2k_0$, $3k_0$ etc. that are present due to unharmonic ('saw'-like) phase variations between 0 and 2π . Given the extent of the circular patterns, the angles of incidence for the admitted partial plane-wave components fall in the relatively wide range from -60° to $+60^\circ$, which in our case is limited by the size of the modeled array. The amplitudes of the partial waves and therefore their relative contributions to the resulting wavefronts show little variation with the incidence angle, as evident from the angular spectra of the k_0 -component presented in Figure 2b and 2d. Thus, the response of the metasurface off the trapped-mode resonance is only weakly sensitive to the direction of the incident wavevectors.

At $\nu_0 = 0.164$ THz, however, the spatial-frequency spectrum collapses along the horizontal axis indicating that the transmission of the metasurface becomes k -dependent and most of the wavevectors deviating from the structure's normal are being rejected (see Figure 3E). This is also illustrated in Figure 2C, which shows that at $\nu_0 = 0.164$ THz the angular spectrum of the transmitted k_0 -component converges along the 0° direction with in the $(-25^\circ, +25^\circ)$ range of angles. The angular selectivity of ASR-metasurface might be improved further by reducing its structural asymmetry, since the latter would increase the strength of coupling between the split-ring metamolecules³⁰.

The effect of wavevector filtering has been also confirmed experimentally using WSS-metamaterial sample that closely resembled the modeled ASR-array both in terms of its size and design parameters. The obtained images of the transmitted wavefronts are presented in Figure 3g–3i. Evidently, the patterns of the wavefronts, as well as their spatial-frequency spectra plotted in Figure 3j–3l show a very good agreement with our simulations. The appearance of noise in the

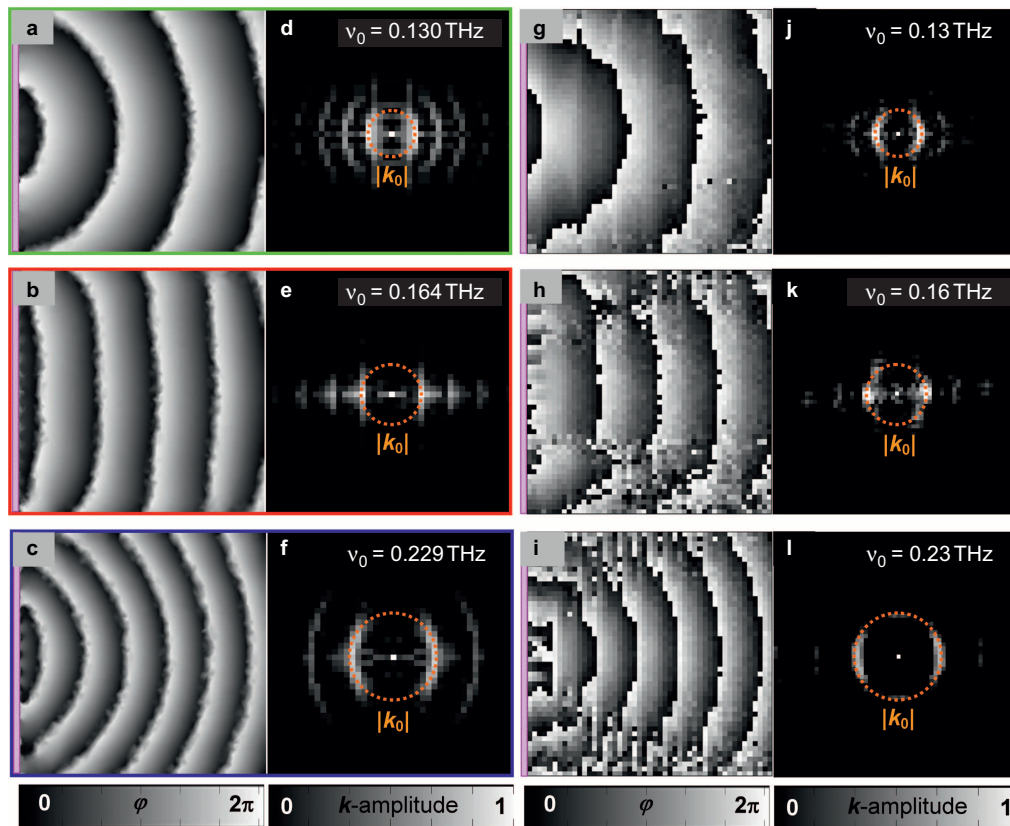


Figure 3. Wavefront transformation by ASR-based wavevector selective surface. (a–c) – Modeled spatial variations of the instantaneous phase, which visualize the wavefronts transmitted by the WSS at 0.130, 0.164 and 0.229 THz when it is illuminated by spherical waves. The waves originate from a vertically polarized point source/pinhole (not shown), on the left of the shaded purple bars, which represent the cross-section of the WSS. (d–f) – Spatial-frequency spectra of the wavefronts shown in panels (a–c) respectively. (g–i) – Experimentally measured spatial variation of the instantaneous phase, which visualizes the wavefront of the initially spherical waves transmitted by WSS at 0.13, 0.16, and 0.23 THz. (j–l) – Spatial-frequency spectra of the wavefront patterns shown in panels (g–i), correspondingly.

phase data at 0.23 THz (and higher frequencies) coincides with the diffraction minima due finite size of the pinhole aperture. More experimental data, including the wavefront images obtained at other frequencies and their comparison with the results of our simulations can be found in Supplementary Information. Although the limited bandwidth of the spatial-frequency filtering might be an issue for some practical applications, this problem could be addressed by employing the so-called double-continuum Fano resonance approach³², where the bandwidth of the effect is increased by stacking 2D-chiral versions of the metamaterial (i.e. ASR structures lacking reflection symmetry)³³ with adiabatically varied resonance frequency.

Unlike the wavevector manipulation performed by the lenses, the demonstrated principal of k -selectivity does not rely on gradient structuring. As the result, metamaterials with strong inter-metamolecular coupling can extract plane-wave components from arbitrary shaped wavefronts. A remote analogue of WSS functionality and the associated ‘tunnel vision’ effect might be found in conventional ray-optics systems such as astronomical telescopes: for the same magnification the telescopes with higher f -ratio (i.e. slower telescopes) will allow an observer to see stars and nebulae on a much darker background yielding overall higher contrast images. Such telescopes have smaller field of view, which limits the directions of the admitted

light rays to those nearly parallel to the axis of the ‘tunnel’ (i.e. telescope) hence blocking most of the light scattered by the atmosphere and immediate surrounding.

CONCLUSIONS

In conclusion, we have shown that strong electromagnetic coupling among the basic structural elements of a planar metamaterial provides a new degree of freedom to light manipulation, leading to an intriguing effect of wavefront rectification and tunnel vision. The effect results in arbitrary-shaped wavefronts becoming planar as they traverse the plane of the metamaterial in the absence of any spatial phase modulation or adaptive feedback, and is demonstrated here both theoretically and experimentally in the THz part of the spectrum. The proposed concept of wavevector selective surfaces can have a number of unique applications. For example, they can improve characteristics of observational instruments by blocking stray light and therefore acting as a flat analogue of a lens hood; or by reducing the effect of light scattering emanating from the immediate surrounding, dew, dust or scratches. WSSs can be exploited for directional filtering in free-space communications in highly turbid or strongly scattering media, yielding an improved signal-to-noise ratio.

ACKNOWLEDGEMENTS

This work is supported by the UK's Engineering and Physical Sciences Research Council through Career Acceleration Fellowship (V.A.F.) and Programme grant EP/G060363/1, by the Royal Society, and by the MOE Singapore grant MOE2011-T3-1-005.

- 1 Munk BA. *Frequency Selective Surfaces: Theory and Design*. New York: Wiley Interscience, 2000.
- 2 Schwanecke AS, Fedotov VA, Khardikov VV *et al*. Nanostructured metal film with asymmetric optical transmission. *Nano Lett* 2008; **8**: 2940.
- 3 Menzel C, Helgert C, Rockstuhl C *et al*. Asymmetric transmission of linearly polarized light at optical metamaterials. *Phys Rev Lett* 2010; **104**: 253902.
- 4 Plum E, Liu X-X, Fedotov VA *et al*. Metamaterials: optical activity without chirality. *Phys Rev Lett* 2009; **102**: 113902.
- 5 Papasimakis N, Fedotov VA, Zheludev NI, Prosvirnin SL. Metamaterial analog of electromagnetically induced transparency. *Phys Rev Lett* 2008; **101**: 253903.
- 6 Zhang S, Genov DA, Wang Y *et al*. Plasmon-induced transparency in metamaterials. *Phys Rev Lett* 2008; **101**: 047401.
- 7 Tassin P, Zhang L, Koschny T *et al*. Low-loss metamaterials based on classical electromagnetically induced transparency. *Phys Rev Lett* 2009; **102**: 053901.
- 8 Fedotov VA, Mladyonov PL, Prosvirnin SL, Zheludev NI. Planar electromagnetic metamaterial with a fish scale structure. *Phys Rev E* 2005; **72**: 056613.
- 9 Hao J, Yuan Y, Ran L *et al*. Manipulating electromagnetic wave polarizations by anisotropic metamaterials. *Phys Rev Lett* 2007; **99**: 063908.
- 10 Grady NK, Heyes JE, Chowdhury DR *et al*. Terahertz metamaterials for linear polarization conversion and anomalous refraction. *Science* 2013; **340**: 1304.
- 11 Ma HF, Wang GZ, Kong GS, Cui TJ. Broadband circular and linear polarization conversions realized by thin birefringent reflective metasurfaces. *Opt. Mat. Express* 2014; **4**: 1719.
- 12 Fedotov VA, Prosvirnin SL, Rogacheva AV, Zheludev NI. Mirror that does not change the phase of reflected wave. *Appl Phys Lett* 2006; **88**: 091119.
- 13 Landy NI, Sajuyigbe S, Mock JJ, Smith DR, Padilla WJ. Perfect metamaterial absorber. *Phys Rev Lett* 2008; **100**: 207402.
- 14 Yu N, Genevet P, Kats MA *et al*. Light propagation with phase discontinuities: generalized laws of reflection and refraction. *Science* 2011; **334**: 333.
- 15 Ni X, Emani NK, Kildishev AV, Boltasseva A, Shalaev VM. Broadband light bending with Plasmonic Nanoantennas. *Science* 2012; **335**: 427.
- 16 Tsai Y-J, Larouche S, Tyler T, Lipworth G, Jokerst NM, Smith DR. Design and fabrication of a metamaterial gradient index diffraction grating at infrared wavelengths. *Opt Express* 2011; **19**: 24411.
- 17 Aieta F, Genevet P, Kats MA *et al*. Aberration-free ultrathin flat lenses and axicons at telecom wavelengths based on Plasmonic Metasurfaces. *Nano Lett* 2012; **12**: 4932.
- 18 Ishii S, Shalaev VM, Kildishev AV. Holey-metal lenses: sieving single modes with proper phases. *Nano Lett* 2013; **13**: 159.
- 19 Roy T, Rogers ETF, Zheludev NI. Sub-wavelength focusing meta-lens. *Opt Express* 2013; **21**: 7577.
- 20 Zhao J, Zhang C, Braun PV, Giessen H. Large-area low-cost plasmonic nanostructures in the NIR for Fano resonant sensing. *Adv Mater* 2012; **24**: OP247.
- 21 Savinov V, Fedotov VA, de Groot PAJ, Zheludev NI. Radiation-harvesting resonant superconducting sub-THz metamaterial bolometer. *Supercond Sci Technol* 2013; **26**: 084001.
- 22 Zheludev NI, Prosvirnin SL, Papasimakis N, Fedotov VA. Lasingspaser. *Nature Photon* 2008; **2**: 351.
- 23 Adamo G, Ou JY, So JK *et al*. Electron-beam-driven collective-mode metamaterial light source. *Phys Rev Lett* 2012; **109**: 217401.
- 24 Papasimakis N, Fedotov VA, Fu YH *et al*. Coherent and incoherent metamaterials and order-disorder transitions. *Phys Rev B* 2009; **80**: 041102(R).
- 25 Jenkins SD, Ruostekoski J. Theoretical formalism for collective electromagnetic response of discrete metamaterial systems. *Phys Rev B* 2012; **86**: 085116.
- 26 Helgert C, Rockstuhl C, Etrich C *et al*. Effective properties of amorphous metamaterials. *Phys Rev B* 2009; **79**: 233107.
- 27 Fedotov VA, Papasimakis N, Plum E *et al*. Spectral collapse in ensembles of metamolecules. *Phys Rev Lett* 2010; **104**: 223901.
- 28 Fedotov VA, Wallauer J, Walther M, Papasimakis N, Zheludev NI. Wavevector selective surface. Conference on Lasers and Electro-Optics (CLEO 2014), 8–13 June 2014, San Jose, CA, USA.
- 29 Bitzer A, Merbold H, Thoman A, Feurer T, Helm H, Walther M. Terahertz near-field imaging of electric and magnetic resonances of a planar metamaterial. *Opt Express* 2009; **17**: 3826.
- 30 Fedotov VA, Rose M, Prosvirnin SL *et al*. Sharp trapped-mode resonances in planar metamaterials with a broken structural symmetry. *Phys Rev Lett* 2007; **99**: 147401.
- 31 Luk'yanchuk B, Zheludev NI, Maier SA *et al*. The Fano resonance in plasmonic nanostructures and metamaterials. *Nature Mater* 2010; **9**: 707.
- 32 Wu C, Khanikaev AB, Shvets G. Broadband slow light metamaterial based on a double-continuum fano resonance. *Phys Rev Lett* 2011; **106**: 107403.
- 33 Plum E, Fedotov VA, Zheludev NI. Planar metamaterial with transmission and reflection that depend on the direction of incidence. *Appl Phys Lett* 2009; **94**: 131901.



This license allows readers to copy, distribute and transmit the Contribution as long as it attributed back to the author. Readers are permitted to alter, transform or build upon the Contribution, and use the article for commercial purposes. Please read the full license for further details at - <http://creativecommons.org/licenses/by/4.0/>

Supplementary information for this article can be found on the *Light: Science & Applications*' website (<http://www.nature.com/lsa/>).

LSA

Research Summary

[Research Summary Manuscript Number] LSA2014314

[Related Article Manuscript number] LSA2014314R

[Article Title] Wavevector Selective Metasurfaces and Tunnel Vision Filters

[Authors] Vassili. A. Fedotov

Optoelectronics Research Centre and Centre for Photonic Metamaterials, University of Southampton, SO17 1BJ, UK

[Research Summary Title] Metasurfaces: tunable tunnel vision

[Research Summary Text]

A surface that blocks light propagation except for selected ‘tunnel vision’ wave vectors can make free-space communication clearer than ever. Vassili Fedotov from the University of Southampton and colleagues achieved this result using microscopically patterned ‘metasurfaces’ that scatter light in intriguing ways. State-of-the-art metasurfaces can transmit or reflect radiation at different frequencies on-demand. The research team extended this concept by fabricating a copper metasurface with an array of split-ring patterns. When a THz light hits this surface, strong coupling between the metasurface components produces a resonance that admits only those wave vectors perpendicular to the surface. This newfound wavevector filtering effect offers intriguing tunnel vision applications — eliminating the effects of stray light and light scattered by environmental particles will significantly improve the signal-to-noise ratios of observational instruments and mobile devices.

About Research Summary- please read

This is a Research Summary about your recently accepted article for Light: Science & Applications. A Research Summary is a short synopsis of the article written by a professional science writer and aims to succinctly inform the general and specialist reader about the aims, main outcomes and significant conclusions of the article.

This will be published by NPG on the journal’s website alongside your article and made freely available to readers, under a Creative Commons "by-nd-nc 3.0 unported" license (see the journal website for details). As an author you are welcome, and we encourage you, to use it to help bring attention to your article; for example you can host it on your own website or share it with your colleagues via email or social networking platforms. Please make sure you attribute it to the journal (e.g. by linking to your article) and do not make derivatives.

You don’t have to edit this text. However, please read the Research Summary and see if this text correctly summarizes your work. Should you find any part of this text that is incorrect or inaccurate, please contact the journal editorial office at light_lsa@ciomp.ac.cn.