

Hidden biodiversity in cryptic habitats provided by porous coastal defence structures

Talia R.W. Sherrard^{a,d*}, Stephen J. Hawkins^b, Peter Barfield^c, Matilda Kitou^d, Simon Bray^{e,f}, Patrick E. Osborne^a

^a Engineering and the Environment, University of Southampton, Southampton, SO17 1BJ, UK

^b Ocean and Earth Science, National Oceanography Centre Southampton, Waterfront Campus, University of Southampton, European Way, Southampton, SO14 3ZH, UK

^c Fugro EMU Ltd., Victory House, Unit 16 Trafalgar Wharf, Hamilton Rd, Portsmouth PO6 4PX

^d Ove Arup and Partners, 13 Fitzroy St, London, W1T 4BQ

^e School of Biological Science, University of Southampton, SO17 1BJ, UK

^f AHTI Ltd., Highcroft Industrial Estate, Enterprise Road, Waterlooville, Hampshire, PO8 0BT

* Corresponding author at: OVE Arup and Partners, 13 Fitzroy Street, London, W1T 4BQ. Email address: talia.sherrard@arup.com

Abstract

In response to flood risk from rising and stormier seas, increasing amounts of natural coastline worldwide are being replaced by a proliferation of coastal defence structures. While the primary role of defence structures is protecting the coastline, consideration should be given to the biological coastal communities they support. Artificial structures are currently seen as poor habitats for marine organisms. They are constructed in harsh coastal environments, lack structural complexity, and are subjected to episodic disturbance from maintenance, reducing their suitability as habitats for coastal species. Recent work has focused on mitigating the impacts of coastal defence structures, through secondary routes such as enhancing biodiversity by encouraging colonisation of marine biota. Research thus far has focused on enhancements to improve structural complexity on the external surfaces of coastal defences. Many structures are porous with internal compartments. To date no work has been undertaken on the habitat provided by the internal surfaces of the blocks used in building structures.

We investigated the role of porous coastal defence structures in habitat provision. Taking advantage of a groyne reduction from 45 m to 20 m length, we surveyed the internal environment of the structure. We also considered the impacts of maintenance activity on coastal assemblages. Our work shows that the internal environment of artificial structures provides functional habitat space supporting higher species richness and diversity than external surfaces. The more benign environment of internal surfaces protects from desiccation stress and is probably experiences less scoured by mobile sediments, and as such is of unrealised importance to coastal assemblages. External surfaces are also subject to high levels of disturbance from maintenance activities, further limiting the potential ecological contribution this area of the artificial habitat might otherwise develop. These findings reveal the multifunctional role of porous coastal

defence structures, acting as engineering protection and habitats for coastal assemblages.

Keywords: Coastal protection; Porous structures; Coastal management; Habitat provision; Biodiversity; Conservation; Multifunctional role

1 Introduction

Coastal areas provide essential economic resources and satisfy a variety of societal needs. Coastal ecosystems account for a substantial proportion of global ecosystem services (Costanza et al., 1999; Martínez et al., 2007), including coastal protection (Bulleri et al., 2005; Chapman and Underwood, 2011; Dugan et al., 2011; Garcia et al., 2004). Faced with the effects of accelerated climate change, coastal regions are susceptible to flooding and loss of land, requiring adaptational actions (Airolidi et al., 2005; Burcharth et al., 2007; Nicholls and Mimura, 1998; Philippart et al., 2011). The development of coastal defence structures (CDS) is fundamental in protecting land, property, infrastructure and other economic and environmental resources. Thus, in many areas worldwide, coastlines are becoming dominated by artificial structures (Airolidi et al., 2005; Bulleri and Airolidi, 2005; Firth et al., 2014; Firth et al., 2013a; Lique et al., 2013; MAFF, 2000; Moschella et al., 2005) causing significant changes to shores through loss, replacement or fragmentation of natural habitats. This places intense pressure on coastal resources and the environment, and affects the structure and function of related marine ecosystems (Airolidi and Beck, 2007; Airolidi et al., 2005; Bulleri and Chapman, 2004; Connell and Glasby, 1999).

Infrastructure placed in any natural environment will inevitably become colonised by primary settlers such as epibenthic marine organisms and biofoulers (Evans, 2016). Artificial structures can be viewed as surrogate habitats for natural shores (Burt et al., 2011; Connell and Glasby, 1999; Moschella et al., 2005). With the aid of additional structural modifications to ameliorate habitat heterogeneity, increased colonisation and enhanced biodiversity of marine species on artificial substrates can be encouraged (Evans et al., 2016; Firth et al., 2013b; Firth et al., 2013). Currently, CDS are seen as poor substitutes for natural rocky shores because they support lower species diversity (Bulleri and Airolidi, 2005; Bulleri et al., 2005; Chapman and Blockley, 2009; Moschella et al., 2005). Coastal defence structures are typically built in high-energy environments with stronger wave action than most natural rocky shores (Burt et al., 2011; Evans et al., 2016; Jonsson et al., 2006), providing harsh habitat conditions for common rocky shore organisms, and opportunities for invasive non-native species through new hard substrata (Airolidi and Bulleri, 2011; Firth et al., 2013a). These conditions are made worse by scouring from sand, gravel and cobbles (Bulleri and Chapman, 2010; Moschella et al., 2005). Coastal defence structures are also less topographically complex than natural rocky shores, reducing habitat and microhabitat provision (Hawkins, 2012; Martins et al., 2010). Their extent is often smaller than natural shores (Moschella et al., 2005), inevitably leading to a restricted species pool and altered biological interactions amongst species (Bulleri and Chapman, 2010; Bulleri, 2005; Bulleri et al., 2005; Coombes et al., 2015; Jackson et al., 2008).

In conjunction with factors considered above, there is constant pressure on the structural integrity of CDS due to erosion, scouring, overtopping and undermining

(Airoidi and Bulleri, 2011; Firth et al., 2013a; Kamphuis, 2010). Over time this can affect the stability and function of the structure, requiring maintenance (Airoidi, 2003; Dayton, 1971; Moschella et al., 2005; Sousa, 1979). Maintenance, however, can result in severe ecological disturbance. It can remove large areas of the habitat and causes disruption to settled communities by the abstraction and replacement of part or all of the structures (Tsinker, 2004; Airoidi and Bulleri, 2011). Such works can dislodge, crush or expose colonising species, potentially reduce biodiversity and open up space to opportunistic species (Dayton, 1971; Hutchinson and Williams, 2003; Sousa, 1979). Large costs are also incurred in the upkeep of the structures (Roebeling et al., 2011)

Porous rock defence structures are widely used in coastal engineering (Crossman et al., 2003). They serve a practical role in the protection of our coastline by reducing wave transmission, reflecting incident waves from the shores, and dissipating wave energy (Burcharth et al., 2015; Dalrymple et al., 1991; Garcia et al., 2004; Losada et al., 1995). Wave dampening is an important function that many other impermeable defence structures do not provide sufficiently (Garcia et al., 2004). The porous structure allows some of the wave energy to pass through whilst creating flow resistance and some reflection from the structure, resulting in turbulence through the porous medium and dissipation of wave energy (Garcia et al., 2004; Jung et al., 2012; Silva et al., 2000). Consequently, essential protection to the shoreline is provided whilst still allowing the natural process of water run-up on the coast. This imitates many natural shoreline barriers, such as coral reefs, mangroves and rocky shores, which can provide natural protection against waves and storm surges (Fernando et al., 2008; Hu et al., 2014; Lowe, 2005a, 2005b; Monismith, 2007).

Porous defence structures are also seen to be more environmentally friendly than solid CDS because they have a smaller physical footprint creating less disturbance to benthic soft sediment organisms (Koraim and Rageh, 2013), and can be more aesthetically pleasing (Garcia et al., 2004). Considerable recent work has focused on improving secondary functions of CDS, particularly enhancing their colonisation by marine biota. Research into artificial enhancements such as boring holes to create rock pools and drilled grooves to increase heterogeneity have been extensively researched (Borsje et al., 2011; Chapman and Blockley, 2009; Coombes et al., 2015; Evans et al., 2016; Firth et al., 2012, 2014, 2013, 2013b; Moschella et al., 2005; Naylor et al., 2011). Other studies have investigated the use of different materials to encourage settlement on the surface of these structures (Coombes *et al.*, 2011a, 2011b, 2013; Green *et al.*, 2012). Whilst this work has been a successful and an integral step towards working with nature by creating “green” infrastructure, the focus has been solely on the external surfaces of CDS. To date no work has been undertaken on the habitat provided by the internal surfaces of the rock units used in building porous CDS because of logistic constraints. Thus, this study presents the first opportunity to document the internal section of a porous rock armour structure. This is potentially a habitat providing some refuge from the harsh physical conditions of the intertidal zone in general (e.g. desiccation and wave action) and defence structures in particular (e.g. scouring).

The use of porous structures in coastal engineering can be viewed as providing a multifunctional role, protecting vulnerable coastlines and supporting intertidal communities. This paper compares the community composition, abundance and biodiversity of species of internal versus external surfaces, taking advantage of the reduction of a groyne from 45 m to 20 m extent at Highcliffe on the South coast of the UK as part of reconfiguring an existing coastal defence scheme. More formally we tested the following hypothesis: internal habitats on the porous defence structure will support

greater species richness and diversity than external habitats, in particular higher numbers of invertebrate species. In addition, we evaluate the extent of anthropogenic disturbance caused by the removal process, to indicate potential levels of general coastal defence maintenance disturbance and consider their possible impacts on coastal species.

2 Methodology

2.1 Study location

The study took place at Highcliffe in Christchurch Bay on the south coast of England, UK (Figure 2.1), Christchurch Bay has a steadily eroding coastline of Barton clay beds and cliffs. It experiences a low amplitude double high tide, which is characteristic of the Solent area, meaning it encounters a further four tidal oscillations in addition to the standard semidiurnal UK tides. In spring tides the area experiences fluctuations in mean water levels of approximately 1 m (Nicholls, 1988; Tyhurst, 1986). There is also a complex tidal current system that circulates within the bay and a south-westerly wave pattern causing high-energy beaches to the west and local sediment drift and erosion. The area receives some protection from the Isle of Wight situated to the east and Durlston Head to the West (Tyhurst, 1986). The Highcliffe coastal defence scheme reverted from timber to rock groynes in 1992, and currently comprises eleven rubble mound groynes, consisting of short and long structures (30 – 45 m) and a bastion, made from Portland Oolitic limestone (Harlow, 2013; Tyhurst, 1986) (Figure 2.2). The groynes are designed with 1 in 2 side slopes, 1 in 2.5 roundhead slopes and a 4 m crest width (Harlow, 2013). These are situated amongst a mixture of shingle and sand beaches (CBC, 2008), and the structures are estimated to sit approximately 1 m into the substrate. Christchurch Borough Council (CBC) deemed the groyne system at Highcliffe to be over engineered with a number of the groynes not being fully utilised within the coastal defence system. Therefore it was decided that the best approach was to remove and recycle the rock units. Owing to the direct attack from the sea, this area regularly undergoes routine maintenance work that consists of the replacement of rock units, removal/replacement of sand, or in some circumstances the partial reconstruction of a structure (CBC, 2008). The management of this area is essential to retain the current coastline, protect residential properties and maintain the shoreline for tourism and local amenity use.

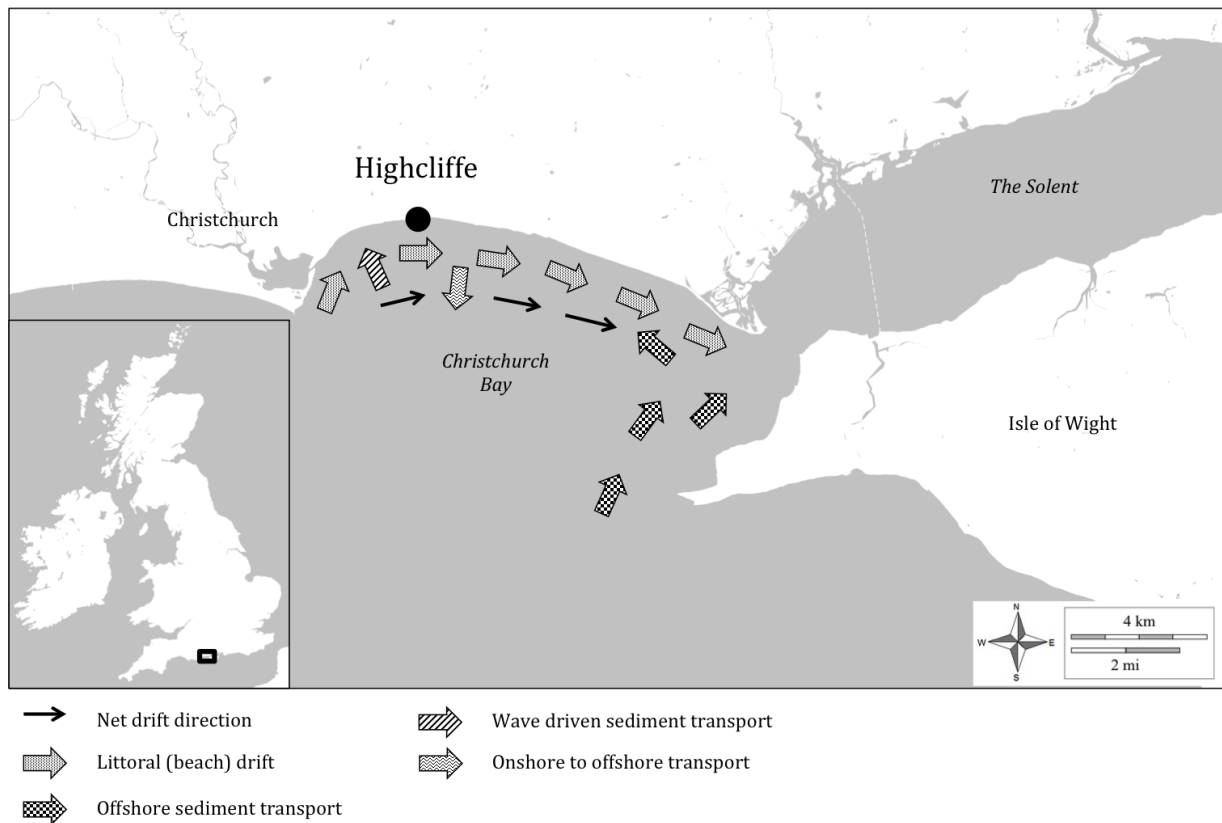


Figure 2.1 Study area: Highcliffe situated within Christchurch Bay on the South coast of the UK. Map shows the sediment transport activity in the bay (adapted from SCOPAC Marine Inputs map).

2.2 Groyne reduction

The groyne reduction took place during the lowest spring tides in June and July 2013 by CBC coastal engineers. The process removed 102 individual rock armour units of varying sizes (1-4 tonne rock units) roughly rectangular in shape, using a digger with a grab or bucket. The size of the structure was reduced from 45 m to approximately 20 m. Surface rock armour units from the end (nose) of the groyne were the first to be removed, exposing the foundation rocks. This allowed access to larger 4 tonne rock armour units that had sunk approximately 1 m into the sediment since they were installed. After the seaward nose and initial foundation units had been removed, the top and side layers were extracted followed by the internal (central) units. Owing to the short tidal window available for work, it was essential for the engineering work to be done in the specific removal order detailed above to ensure that structural integrity was retained between removal periods.

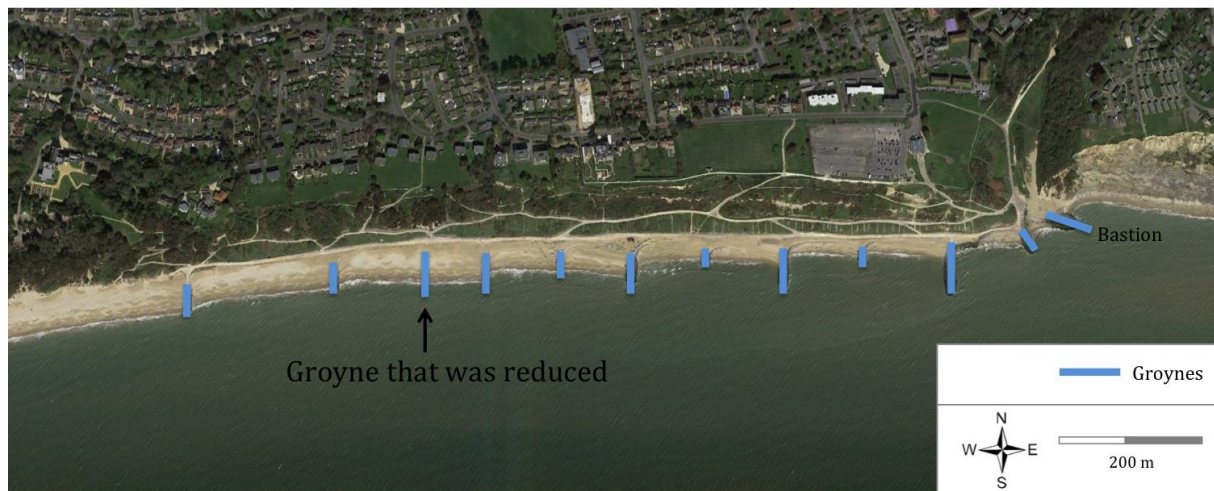


Figure 2.2 Image of the groyne system constructed at Highcliffe within Christchurch bay. Image shows the eleven rock groynes and a bastion of varying long and short lengths, and highlights the study groyne that was reduced.

2.3 Data Sampling

The restricted timeframes meant that ecological sampling was carried out around the engineering works; therefore all information was recorded *in situ*. Photographs and physical details of each unit were recorded, including measurements and calculations of the surface area of each unit face in order to determine the percentage cover species. Each unit face was recorded as an individual sampling point, and categorised by three different factors to determine the position and environmental exposure of each unit face (Figure 2.3): (1) exposure to environmental conditions (comprising i, external wave exposed – outside unit face towards the seaward, ii, external wave sheltered – outside unit face with landward orientation, iii, internal – unit face located within the groyne, sediment – unit face located within soft sediment due sinking over time); (2) elevation on the shore (foundation – lower shore, middle, top of the shore); (3) placement of unit faces within the structure (nose – end of the structure, internal, side, top). Connections to other rock armour units and the estimated percentage damage to each unit from the removal process were also noted.

Biological sampling was conducted for each unit face by identifying organisms present to species level where possible with counts for mobile fauna and percentage cover for sessile species.

Maintenance disturbance was classified as areas of the unit face where fracturing and/or removal of the surface was visible due to the removal process. The level of maintenance disturbance was estimated by calculating the percentage of the unit face damaged or removed. The number of occurrences per rock armour face and frequency of occurrences out of the total sample were also logged.

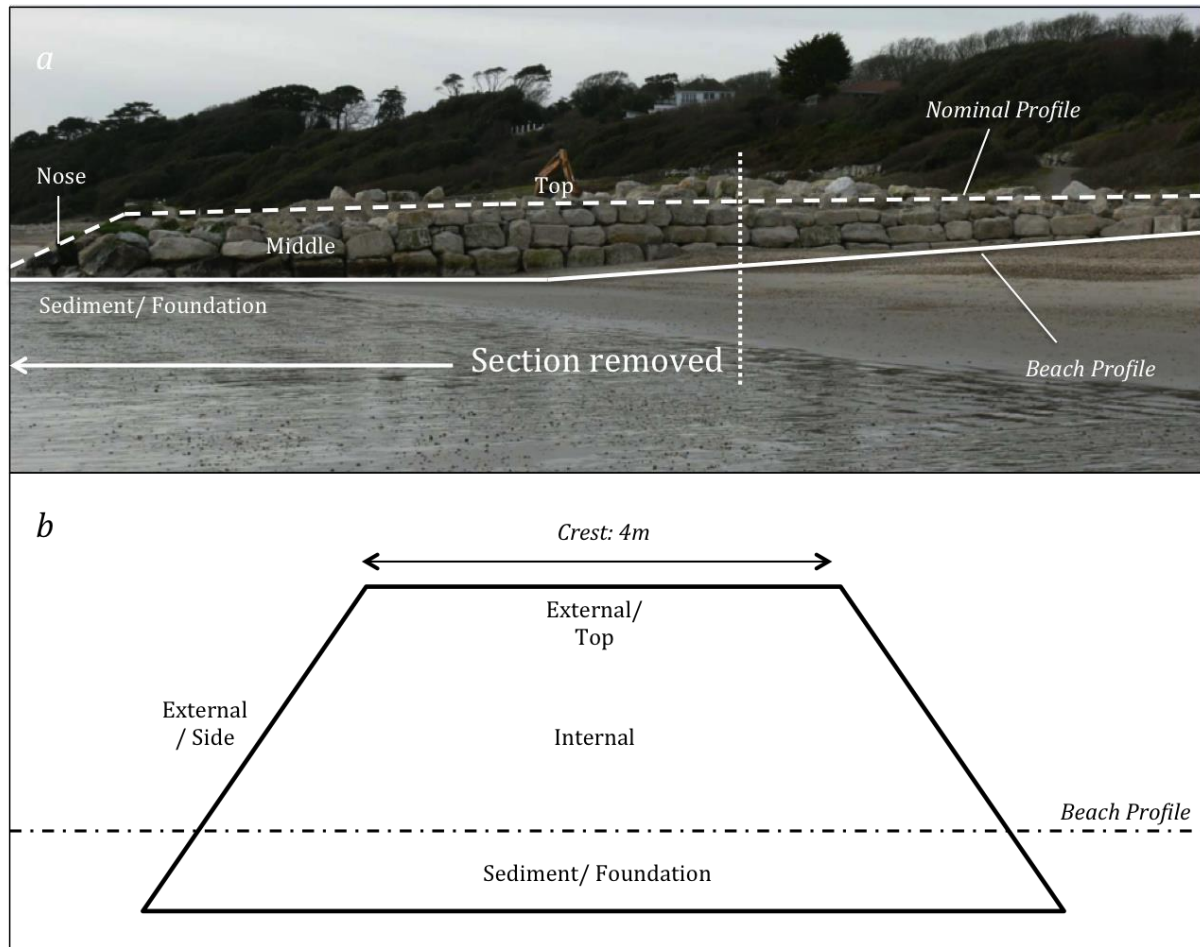


Figure 2.3 Displays the areas categorised within each factor. (a) Shows a side view of the groyne that was removed, and the location of the categories under each factor that are visible. (b) Illustrates a landward facing cross-sectional representation of the groyne, and the relative locations of the categories under each factor.

2.4 Statistical Analysis

To test our hypothesis, statistical analyses were carried out using PRIMER-E ver. 6 and PERMANOVA+ ver. 6 statistical software (Anderson et al., 2008; Clarke, 1993; Clarke et al., 2014) to determine the difference between species richness and percentage abundance of species recorded in relation to exposure levels. Moreover, we conducted supplementary analysis to determine if factors such as placement and elevation affect the data. Data were square-root transformed and a Bray-Curtis similarity matrix (Bray and Curtis, 1957) created for the statistical tests.

Multi-dimensional scaling (MDS) plots using abundance data were created for each factor (exposure, elevation on the shore and placement within the structure) to visualise patterns using rank similarities and hierarchical clustering in the multivariate output (Clarke, 1993; Clarke et al., 2014). Initial Permutational Multivariate Analysis of Variance (PERMANOVA), based on 999 unrestricted random permutations of residuals (Anderson et al., 2008), tested for differences in species richness and assemblages. Factors used in the analysis were: exposure (fixed, 4 levels: external, external sheltered, internal or sediment), elevation on the shore (fixed, 3 levels: foundation, middle or top), and

placement within the structure (fixed, 4 levels: nose, internal, side or top unit). Pair-wise comparisons were used to test differences in the species richness and assemblages specifically in response to exposure levels. Similarity Percentage (SIMPER) was then used to identify percentage contributions of individual species providing the dissimilarities between the internal and external exposure levels (Anderson et al., 2008; Clarke, 1993; Clarke et al., 2014). Finally, we used Simpson's Index of Diversity (D) to calculate the species diversity in the internal and external (exposure levels) habitats.

For the maintenance disturbance, we calculated the average disturbance as a percentage of the surface cover, the number of occurrences and the extent of the damage as a percentage of the total number of samples for each factor level, to provide indicative data which may be used to inform methods for reducing disturbance levels.

3 Results

3.1 Ecological sampling

A total of 102 rock units were removed from the groyne structure, and the faces of each unit recorded. Species recorded during the removal process for the internal and external environments and, more specifically, the presence of species recorded on the rock unit faces and their percentage cover, are displayed in Table 3.1. Internal faces supported a higher number of species, particularly for invertebrate species and red seaweed species, than external unit faces (internal 20 species, external 10 species) (Table 3.1). Mobile fauna such as *Eulalia viridis*, juvenile *Carcinus maenas* and *Nucella lapillus* were all found only on internal faces. There was, however, a higher mean percentage cover of species found on external faces ($53\% \pm 50\%$), than on internal faces ($25\% \pm 61\%$) (Table 3.1). The results in Table 3.1 suggest that this is due to the presence of the alga *Ulva* spp., found in both environments, but more abundant on the external faces. *Ulva* spp. was recorded to cover on average $47\% (\pm 31\%)$ of external faces compared to $5\% (\pm 9\%)$ of internal faces. Calculations of Simpson's Index of Diversity (D) showed overall that internal surfaces had higher species diversity (0.90) than external surfaces (0.82).

An MDS plot (with 25% similarity contours) for exposure factors showed differences with exposure levels (Figure 3.1a), particularly internal and external, whereas external sheltered and sediment levels appeared to be more distributed. Figures 3.1b & c show no patterns with elevation on the shore and placement within the structure.

PERMANOVA analysis (Table 3.2) highlighted significant differences in the species assemblages due to exposure ($Pseudo-F = 8.80$, $P = <0.01$). Further analysis of the exposure factor using pair-wise tests showed significant differences between external areas and other exposure levels, particularly internal and external ($t = 5.20$, $P = <0.01$), and sediment and external ($t = 2.78$, $P = <0.01$). Analysis of the factors elevation and placement also showed significant differences in species assemblages. Additionally, PERMANOVA highlighted interactions between exposure and placement ($Pseudo-F = 2.14$, $P = <0.01$), and exposure and elevation ($Pseudo-F = 2.16$, $P = <0.01$), but no impact on species assemblages due to placement and elevation, or all factors combined. More specific analysis was not carried out, as this was not the focus of the study.

Table 3.1 Total numbers of species and their mean percentage covers (sessile species only) in internal and external surfaces. Species diversity (D) was calculated using Simpson's Index. Number of unit sampled (n) = 102.

Group	Species	Internal				External			
		No. species	n	Mean % Cover	SD (\pm)	No. species	n	Mean % Cover	SD (\pm)
Green Seaweeds	<i>Ulva</i> spp.	1	34	4.82	8.81	1	60	47.42	31.43
Red Seaweeds	<i>Mastocarpus stellatus</i>	6	15	0.38	1.12	2	15	0.30	0.73
	<i>Chondrus crispus</i>		28	7.87	15.89		4	1.33	5.21
	<i>Hildenbrandia</i> spp.		2	0.07	0.56		0	0.00	0.00
	<i>Erythroglossum laciniatum</i>		1	0.06	0.55		0	0.00	0.00
	<i>Porphyra</i> spp.		1	0.01	0.11		0	0.00	0.00
	<i>Polysiphonia</i> spp.		2	0.02	0.15		0	0.00	0.00
Brown Seaweeds	<i>Fucus spiralis</i>	3	6	0.48	3.32	2	9	0.66	2.39
	<i>Algazonia</i>		1	0.24	2.18		0	0.00	0.00
	<i>Dictyota dichotoma</i>		0	0.00	0.00		3	0.13	0.58
	<i>Sargassum muticum</i>		5	1.87	10.26		0	0.00	0.00
Invertebrates	<i>Patella vulgata</i>	10	27	0.62	1.17	5	26	0.92	1.74
	<i>Patella depressa</i>		14	0.26	0.64		23	0.50	0.94
	<i>Patella ulyssiponensis</i>		7	0.12	0.45		8	0.22	0.65
	<i>Cirripedia</i>		30	6.88	13.75		12	1.64	5.82
	<i>Actinia equina</i>		19	0.35	0.88		0	0.00	0.00
	<i>Actinia fragacea</i>		1	0.01	0.11		0	0.00	0.00
	<i>Mytilus edulis</i>		35	0.70	1.40		15	0.31	0.75
	<i>Eulalia viridis</i>		3	-	-		0	-	-
	<i>Carcinus maenas</i> (juv)		1	-	-		0	-	-
	<i>Nucella lapillus</i>		4	-	-		0	-	-
Total		20	236	24.76	61.34	10	175	53.43	50.24
Simpson's Index of Diversity (D)		0.90				0.82			

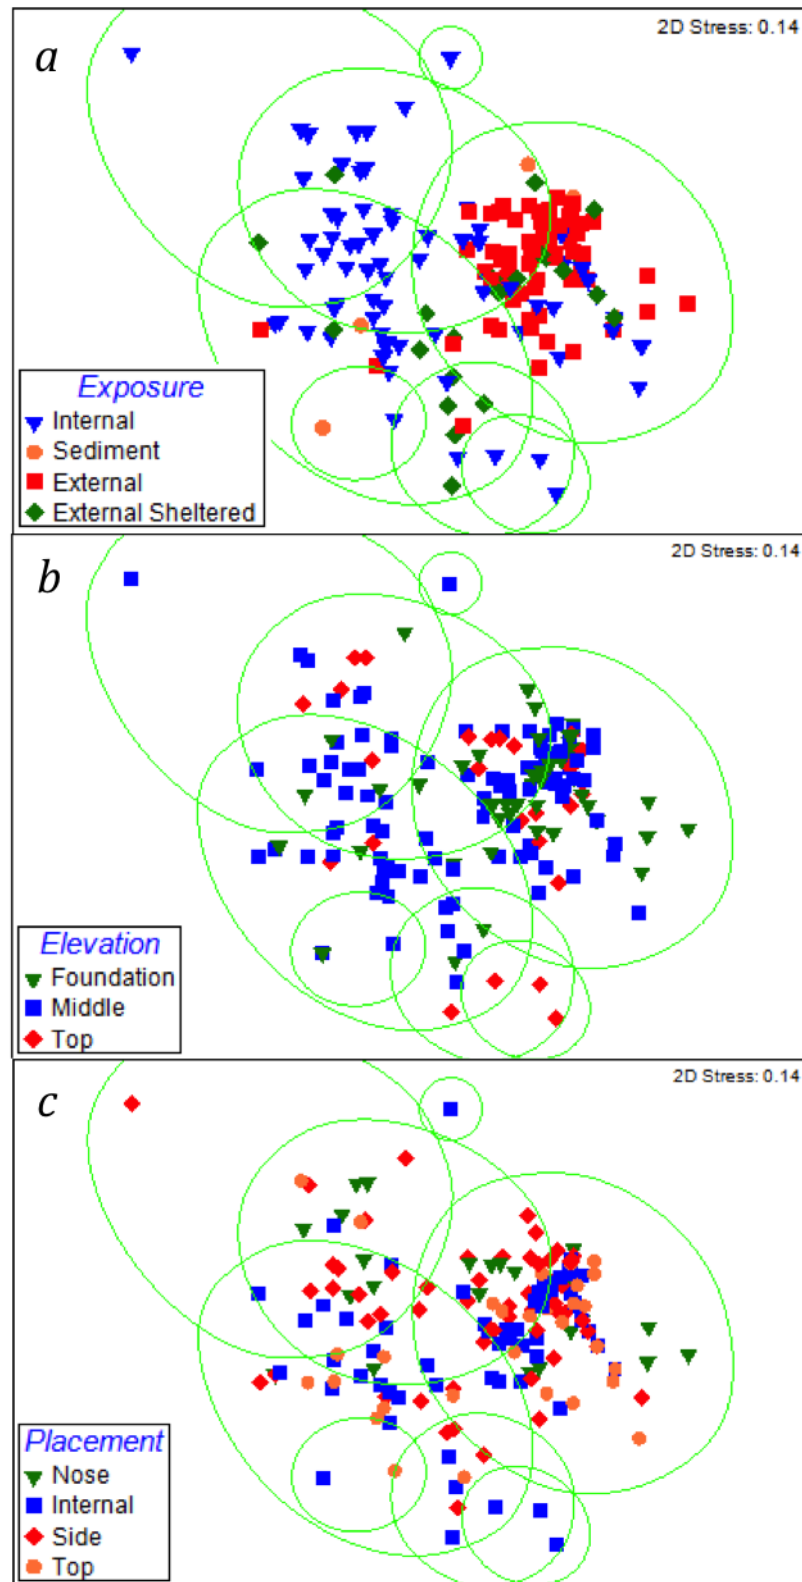


Figure 3.1 MDS plots of percentage abundance data based on rank similarity for (a) exposure (b) elevation on the shore (c) placement within the structure (Fig B). Contours of 25% similarity are shown.

Table 3.2 PERMANOVA analysis identifying the impacts of the physical factors that affect community colonisation and species richness ($***P(perm) = 0.001$; $**P(perm) < 0.01$; $*P(perm) < 0.05$; NS = $P(perm) > 0.05$). Factors analysed were: exposure (fixed, 4 levels: external, external sheltered, internal or sediment), elevation on the shore (fixed, 3 levels: foundation, middle or top), and placement within the structure (fixed, 4 levels: nose, internal, side or top unit).

Factor	Interactions/ Pair-wise test	Pseudo-F	df	t
Exposure		8.80***	2	
	1. Sediment, External			2.78***
	2. Sediment, External sheltered			1.34
	3. Sediment, Internal			1.00
	4. External, External sheltered			1.92*
	5. External, Internal			5.20***
	6. External sheltered, Internal			1.44
Placement		2.43**	3	
Elevation		3.77***	2	
Exp x Place		2.14***	6	
Exp x Elev		2.16**	4	
Place x Elev		1.44	3	
Exp x Place x Elev		1.11	3	

SIMPER analysis (Table 3.3) confirmed that *Ulva* spp. were the characterising organisms causing observed differences between internal and external faces contributing 42% of the dissimilarity observed. *Ulva* spp. were recorded on every external surface and covered the surface faces, whilst other species occupied smaller areas. *Chondrus crispus* (14%) and barnacles (13%) were contributing factors but were found in higher abundance on internal compared to external surfaces.

Table 3.3 SIMPER analysis of the percentage (%) contribution of species to assemblage dissimilarities for and between exposure levels on the groyne (internal and external). Only species with contributions higher than 3% in at least one pairwise comparison are reported. Numbers in brackets are average dissimilarities between assemblages.

Species	Int x Ext (76.14)	Internal (24.67)	External (59.44)
<i>Ulva</i> spp.	42.72	70.39	5.57
<i>Chondrus crispus</i>	13.51	79.86	-
Barnacles	13.3	77.94	-
<i>Patella vulgata</i>	5.43	92.6	-
<i>Mytilus edulis</i>	5.01	88.61	-
<i>Mastocarpus stellatus</i>	3.44	-	-
<i>Patella depressa</i>	3.39	-	-
<i>Actinia equina</i>	3.38	-	-

3.2 Maintenance disturbance

Table 3.4 shows that damage levels differed among locations. External units, alongside those located on the side of the structure and in the middle of the shore (see Figure 2.3), had the highest incidences of maintenance damage and the highest average percentage cover per unit. External and external sheltered units had the highest number of occurrences as a proportion of the total sample, as well as those units located on the side and nose of the structure. Overall, maintenance disturbance recorded in the external units occurred much more frequently than internal units and caused a higher amount of damage to the surface.

Table 3.4 Average percentage cover of maintenance disturbance, number of occurrences of damage on internal and external rock armour units, and the frequency of occurrences (%) out of the total number of faces sampled (n = 280).

Factor	Level	Average Disturbance (% cover)	Number of Occurrences	% of Total Sample
Exposure	Sediment	0.0	0	0.0
	Internal	1.4 ±6.0	8	7.3
	External sheltered	2.0 ±6.2	5	20.8
	External	2.8 ±8.2	15	14.2
Elevation	Foundation	0.5 ±1.9	5	5.6
	Middle	2.5 ±8.4	16	11.8
	Top	2.1 ±6.2	7	12.7
Placement	Nose	2.8 ±6.8	8	21.1
	Internal	0.8 ±5.4	4	3.3
	Side	3.0 ±8.4	13	15.5
	Top	1.1 ±4.0	3	8.3

4 Discussion

4.1 Habitat Provision

The removal of a porous CDS provided a unique opportunity to gain better insight into the total habitat provision capabilities of artificial structures. It is unusual to come across the decommissioning of CDSs and this rare opportunity provided access to areas of artificial structures that have not previously been investigated or actively considered as a potential suitable habitat for coastal assemblages. By carrying out biological sampling during removal of a porous defence structure, we were able to gain important insights into the coastal species found on artificial structures.

We found significant differences between the biological communities present in internal and external environments (Table 3.1, Figure 3.1a). Internal surfaces supported twice as many species of both invertebrates and algae as the external environment,

particularly mobile species. A clear demonstration of the higher species richness associated with internal habitats on porous defence structures. Moreover, we found a greater species diversity overall on the internal than the external habitats. The results, however, showed higher total percentage cover by all combined species on external than internal habitats. Further analysis (Table 3.3) indicated *Ulva* spp. as the dominant species externally. *Ulva* spp. are green ephemeral opportunistic early successional species and require light to survive. They covered much of the rock unit surfaces in the external environment. This was most likely because of the unfavourable conditions for the majority of invertebrate species, and lack of grazing pressure (Coleman et al., 2006; Hawkins, 1981; Jenkins et al., 2005). The only species not recorded from the internal surface but present on the external exposed surface was *Dictyota dichotoma* (brown fan weed). Invertebrate species were mainly found to colonise the internal areas of the structure in order to seek refuge to allow for foraging, whilst avoiding scour, wave exposure, desiccation and potential predation (Silva et al., 2008).

Despite the lack of visual relationships from the MDS plots, the overall results showed that there was an apparent difference in the species assemblages because of elevation on the shore and placement on the structure. The results also showed combined effects on species assemblages due to exposure and elevation on the shore, and exposure and placement on the structure. These are most likely because most external rock units will inevitably only be located on certain elevation or position areas such as the nose or sides of the groyne, compared to the internal exposure levels which would not be categorised under those locations.

The results of our study support our hypothesis that internal habitats on the porous defence structure will support greater species richness and diversity than external habitats, in particular higher numbers of invertebrate species. Coastal defence structures are constructed in high dynamic environments where there is increased pressure on invertebrate and plant species. *Ulva* spp. are known to colonise marine intertidal habitats (Bunker et al., 2010; Maggs et al., 2007) and dominate exposed surfaces leaving very little surface for other species to attach and colonise, therefore creating inter- and intraspecific competition for space and reducing biodiversity in these areas. *Ulva*, a green algae species, has high light requirements for photosynthesis, therefore colonising external, and non-shaded areas (Bunker et al., 2010; Maggs et al., 2007). *Chondrus crispus* and *Mastocarpus stellatus* successfully colonise the internal areas more than the external environments. Although these species often colonise exposed natural rocky shores, they can tolerate reduced light levels (sciaphilic) (Bunker et al., 2010) and are therefore able to colonise shaded, internal areas where there is more protection from waves. They are also later successional species and may be excluded by persistent ephemerals (Sousa, 1979). Invertebrate species were found primarily in the internal areas, with very few (low cover) exceptions. Species distributions on rocky shores are set by the interplay of vertical (tidal elevation) and horizontal (wave action) stress gradients, coupled with biological interactions (Raffaelli and Hawkins, 1996). Refuges are provided by microhabitats created by crevices, cracks and rock pools, which are common features of natural rocky shores (Johnson et al., 2003).

Until now, artificial structures have been perceived as poor surrogates for natural shores because they lack habitat complexity and heterogeneity (Chapman and Blockley, 2009; Firth et al., 2013; Firth et al., 2013a; Moschella et al., 2005). Our study shows that porous defence structures do provide valuable habitats for species to colonise formed

between rock unit interfaces providing refuge from desiccation stress (Hawkins and Hartnoll, 1983) and disturbance through scouring by cobbles, gravel and sand (Bulleri and Chapman, 2010; Moschella et al., 2005). Not only do porous defence structures effectively dissipate wave energy onto the coastline (Garcia et al., 2004; Jung et al., 2012; Silva et al., 2000), they also provide habitat complexity and protection within their interstices encouraging higher biodiversity than other types of coastal defence designs. They also enable water flow within the structure, providing access to food and submersion for periods, which is essential for many intertidal species. The multifunctionality of porous defence structures is clearly a desirable feature and the benefits conferred are valuable considerations which may usefully inform both engineering and management.

4.2 Maintenance disturbance

There has been little research investigating the effects of maintenance disturbance on coastal assemblages (but see Airolidi and Bulleri, 2011). Our study demonstrates the levels of disturbance that occur during coastal maintenance, particularly to internal and external environments. Anthropogenic disturbance can create openings for opportunistic and invasive non-native species to settle (Dayton, 1971; Hutchinson and Williams, 2003; Sousa, 1979). One key finding is the difference in disturbance levels between internal and external environments. There was nearly double the amount of maintenance disturbance on the external rock unit faces compared to internal ones. Typical coastal maintenance will often involve the replacement of a number of rock units that may become dislodged or moved during intense weather conditions. This will mainly be on external rock units that are more exposed to the extreme conditions and susceptible to movement. Moving units during maintenance work to restore structural integrity after storm damage is an activity that will disrupt those species occupying affected units, as well as species associated with any connecting units. This emphasises the importance of internal environments as suitable habitats to support higher levels of biodiversity on coastal shores. Future work should be carried out to investigate further the effects of disturbance.

5 Concluding Comments

Until now, the internal environment of CDS has not been actively considered or explored by ecologists for its potential to provide habitat and enhance biodiversity. Our study highlights the importance of these hidden environments for coastal species, suggesting that porous CDS provide improved habitat heterogeneity and refuges via internal compartments. These features are not present in solid structure designs with no internal compartments. External environments on coastal defence structures are exposed to intense environmental pressures made worse by anthropogenic disturbance from any maintenance work. Therefore they only support a small number of hardy species. Focus must be turned to the internal environment, which can support a higher diversity of species. Porous structures, a common coastal engineering design, are not only effective in engineering; they are also considerably more effective for biodiversity than previously realised. Porous CDS should be considered more widely in future coastal engineering schemes, to encourage settlement of coastal species and to sustain coastal communities, particularly given the growing number of artificial structures and in light

of gross environmental change and habitat loss. Finally, further investigations into the impacts of maintenance activity on coastal assemblages should be considered to inform coastal engineers and to provide evidence-based decisions for effective coastal defence management regimes.

Acknowledgements

The authors wish to thank Christchurch Borough Council for their permission to carry out this work during the coastal engineering works, and in particular Steve Woolard for his organisation and assistance throughout the project. We wish to thank Mike Hinton from Neptune Plant Contractor for carrying out the groyne removal process and making the sampling possible. TRWS was funded by an EPSRC studentship. Many thanks also go to OVE Arup & Partners, and Fugro EMU Ltd for supporting and funding this research. We would also like to thank Dr. Ilse Steyl from the University of Southampton and AHTI Ltd for her participation in the set up of the research project and funding.

References

- Airolidi, L., 2003. The effects of sedimentation on rocky coast assemblages. *Oceanogr. Mar. Biol. an Annu. Rev.* 41, 161–236.
- Airolidi, L., Abbiati, M., Beck, M., Hawkins, S., Jonsson, P., Martin, D., Moschella, P., Sundelof, a, Thompson, R., Aberg, P., 2005. An ecological perspective on the deployment and design of low-crested and other hard coastal defence structures. *Coast. Eng.* 52, 1073–1087. doi:10.1016/j.coastaleng.2005.09.007
- Airolidi, L., Beck, M., 2007. Loss, status and trends for coastal marine habitats of Europe. *Oceanogr. Mar. Biol. an Annu. Rev.* 45, 345–405.
- Airolidi, L., Bulleri, F., 2011. Anthropogenic disturbance can determine the magnitude of opportunistic species responses on marine urban infrastructures. *PLoS One* 6, e22985. doi:10.1371/journal.pone.0022985
- Anderson, M., Gorley, R., Clark, K., 2008. PERMANOVA+ for PRIMER: Guide to software and statistical methods. Plymouth: PRIMER-E.
- Borsje, B.W., van Wesenbeeck, B.K., Dekker, F., Paalvast, P., Bouma, T.J., van Katwijk, M.M., de Vries, M.B., 2011. How ecological engineering can serve in coastal protection. *Ecol. Eng.* 37, 113–122. doi:10.1016/j.ecoleng.2010.11.027
- Bray, J.R., Curtis, J.T., 1957. An Ordination of the Upland Forest Communities of Southern Wisconsin. *Ecol. Monogr.* 27, 325–349. doi:10.2307/1942268
- Bulleri, F., 2005. Role of recruitment in causing differences between intertidal assemblages on seawalls and rocky shores. *Mar. Ecol. Prog. Ser.* 287, 53–64. doi:10.3354/meps287053
- Bulleri, F., Airolidi, L., 2005. Artificial marine structures facilitate the spread of a non-indigenous green alga, *Codium fragile* ssp. *tomentosoides*, in the north Adriatic Sea. *J. Appl. Ecol.* 42, 1063–1072. doi:10.1111/j.1365-2664.2005.01096.x
- Bulleri, F., Chapman, M.G., 2010. The introduction of coastal infrastructure as a driver of change in marine environments. *J. Appl. Ecol.* 47, 26–35. doi:10.1111/j.1365-2664.2009.01751.x
- Bulleri, F., Chapman, M.G., 2004. Intertidal assemblages on artificial and natural habitats in marinas on the north-west coast of Italy. *Mar. Biol.* 145, 381–391. doi:10.1007/s00227-004-1316-8
- Bulleri, F., Chapman, M.G., Underwood, a J., 2005. Intertidal assemblages on seawalls and vertical rocky shores in Sydney Harbour, Australia. *Austral Ecol.* 30, 655–667. doi:10.1111/j.1442-9993.2005.01507.x
- Bunker, F.S.D., Maggs, C.A., Brodie, J.A., Bunker, A.R., 2010. *Seasearch Guide to Seaweeds of Britain and Ireland*. Marine Conservation Society, Ross-on-Wye.
- Burcharth, H.F., Hawkins, S.J., Zanuttigh, B., Lamberti, A., 2007. *Environmental Design Guidelines for Low Crested Coastal Structures*. Elsevier.
- Burcharth, H.F., Zanuttigh, B., Andersen, T.L., Lara, J.L., Steendam, G.J., Ruol, P., Sergeant, P., Ostrowski, R., Silva, R., Martinelli, L., Nørgaard, J.Q.H., Mendoza, E., Simmonds, D., Ohle, N., Kappenberg, J., Pan, S., Nguyen, D.K., Toorman, E.A., Prinos, P., Hoggart, S., Chen, Z., Piotrowska, D., Pruszk, Z., Schönhof, J., Skaja, M., Szmytkiewicz, P., Szmytkiewicz, M., Leont'yev, I., Angelelli, E., Formentin, S.M., Smaoui, H., Bi, Q., Sothmann, J., Schuster, D., Li, M., Ge, J., Lenzion, J., Koftis, T., Kuznetsov, S., Puente, A., Echavarri, B., Medina, R., Díaz-Simal, P., Rodriguez, I.L., Maza, M., Higuera, P., 2015. Chapter 3 - Innovative Engineering Solutions and Best Practices to Mitigate Coastal Risk, in: Thompson, B.Z.N.P.V.F.B.C.B.T.-C.R.M. in a C.C. (Ed.), . Butterworth-Heinemann, Boston, pp. 55–170. doi:http://dx.doi.org/10.1016/B978-

- Burt, J., Bartholomew, A., Sale, P.F., 2011. Benthic development on large-scale engineered reefs: A comparison of communities among breakwaters of different age and natural reefs. *Ecol. Eng.* 37, 191–198. doi:10.1016/j.ecoleng.2010.09.004
- CBC, 2008. Christchurch Beaches and Hinterland Management Plan.
- Chapman, M.G., Blockley, D.J., 2009. Engineering novel habitats on urban infrastructure to increase intertidal biodiversity. *Oecologia* 161, 625–635.
- Chapman, M.G., Underwood, A.J., 2011. Evaluation of ecological engineering of “armoured” shorelines to improve their value as habitat. *J. Exp. Mar. Bio. Ecol.* 400, 302–313. doi:10.1016/j.jembe.2011.02.025
- Clarke, K.R., 1993. Non-parametric multivariate analyses of changes in community structure. *Aust. J. Ecol.* 117–143.
- Clarke, K.R., Gorley, R.N., Somerfield, P.J., Warwick, R.M., 2014. Change in marine communities: an approach to statistical analysis and interpretation, 3rd ed. PRIMER-E, Plymouth.
- Coleman, R. a., Underwood, A.J., Benedetti-Cecchi, L., Åberg, P., Arenas, F., Arrontes, J., Castro, J., Hartnoll, R.G., Jenkins, S.R., Paula, J., Santana, P. Della, Hawkins, S.J., 2006. A continental scale evaluation of the role of limpet grazing on rocky shores. *Oecologia* 147, 556–564. doi:10.1007/s00442-005-0296-9
- Connell, S., Glasby, T., 1999. Do urban structures influence local abundance and diversity of subtidal epibiota? A case study from Sydney Harbour, Australia. *Mar. Environ. Res.* 47.
- Coombes, M., 2011. Biogeomorphology of Coastal Structures: Understanding interactions between hard substrata and colonising organisms as a tool for ecological enhancement. University of Exeter.
- Coombes, M. a., Feal-Pérez, A., Naylor, L. a., Wilhelm, K., 2013. A non-destructive tool for detecting changes in the hardness of engineering materials: Application of the Equotip durometer in the coastal zone. *Eng. Geol.* 167, 14–19. doi:10.1016/j.enggeo.2013.10.003
- Coombes, M. a., La Marca, E.C., Naylor, L. a., Thompson, R.C., 2015. Getting into the groove: Opportunities to enhance the ecological value of hard coastal infrastructure using fine-scale surface textures. *Ecol. Eng.* 77, 314–323. doi:10.1016/j.ecoleng.2015.01.032
- Coombes, M. a., Naylor, L. a., Thompson, R.C., Roast, S.D., Gómez-Pujol, L., Fairhurst, R.J., 2011. Colonization and weathering of engineering materials by marine microorganisms: an SEM study. *Earth Surf. Process. Landforms* 36, 582–593. doi:10.1002/esp.2076
- Costanza, R., Andrade, F., Antunes, P., van den Belt, M., Boesch, D., Boersma, D., Catarino, F., Hanna, S., Limburg, K., Low, B., Molitor, M., Pereira, J.G., Rayner, S., Santos, R., Wilson, J., Young, M., 1999. Ecological economics and sustainable governance of the oceans. *Ecol. Econ.* 31, 171–187. doi:10.1016/S0921-8009(99)00077-4
- Crossman, M., Segura-Dominguez, S., Allsop, W., 2003. Low coast rock structures for beach control and coast protection.
- Dalrymple, R. a., Losada, M. a., Martin, P. a., 1991. Reflection and transmission from porous structures under oblique wave attack. *J. Fluid Mech.* 224, 625. doi:10.1017/S0022112091001908
- Dayton, P., 1971. Competition, Disturbance, and Community Organization: The Provision and Subsequent Utilization of Space in a Rocky Intertidal Community. *Ecol. Monogr.* 41, 351–389.
- Dugan, J., Airolidi, L., Chapman, M., Walker, S., Schlacher, T., 2011. Estuarine and Coastal Structures: Environmental effects, a focus on shore and nearshore structures, in: *Treatise on Estuarine and Coastal Science*. Elsevier Inc., pp. 17–42. doi:10.1016/B978-0-12-374711-

- Evans, A.J., 2016. Artificial coastal defence structures as surrogate habitats for natural rocky shores: giving nature a helping hand by. Aberystwyth University.
- Evans, A.J., Firth, L.B., Hawkins, S.J., Morris, E.S., Goudge, H., Moore, P.J., 2016. Drill-cored rock pools: An effective method of ecological enhancement on artificial structures. *Mar. Freshw. Res.* 67, 123–130. doi:10.1071/MF14244
- Fernando, H.J.S., Samarawickrama, S.P., Balasubramanian, S., Hettiarachchi, S.S.L., Voropayev, S., 2008. Effects of porous barriers such as coral reefs on coastal wave propagation. *J. Hydro-environment Res.* 1, 187–194. doi:10.1016/j.jher.2007.12.003
- Firth, L., Thompson, R., Hawkins, S., 2012. Eco--engineering of artificial coastal structures to enhance biodiversity: An illustrated guide.
- Firth, L.B., Mieszkowska, N., Thompson, R.C., Hawkins, S.J., 2013a. Climate change and adaptational impacts in coastal systems: the case of sea defences. *Environ. Sci. Process. Impacts* 15, 1665–70. doi:10.1039/c3em00313b
- Firth, L.B., Schofield, M., White, F.J., Skov, M.W., Hawkins, S.J., 2014. Biodiversity in intertidal rock pools: Informing engineering criteria for artificial habitat enhancement in the built environment. *Mar. Environ. Res.* 102, 122–130. doi:10.1016/j.marenvres.2014.03.016
- Firth, L.B., Thompson, R.C., Bohn, K., Abbiati, M., Airolidi, L., Bouma, T.J., Bozzeda, F., Ceccherelli, V.U., Colangelo, M. a., Evans, a., Ferrario, F., Hanley, M.E., Hinz, H., Hoggart, S.P.G., Jackson, J.E., Moore, P., Morgan, E.H., Perkol-Finkel, S., Skov, M.W., Strain, E.M., van Belzen, J., Hawkins, S.J., 2013b. Between a rock and a hard place: Environmental and engineering considerations when designing coastal defence structures. *Coast. Eng.* doi:10.1016/j.coastaleng.2013.10.015
- Firth, L.B., Thompson, R.C., White, F.J., Schofield, M., Skov, M.W., Hoggart, S.P.G., Jackson, J., Knights, A.M., Hawkins, S.J., 2013. The importance of water-retaining features for biodiversity on artificial intertidal coastal defence structures. *Divers. Distrib.* n/a–n/a. doi:10.1111/ddi.12079
- Garcia, N., Lara, J.L., Losada, I.J., 2004. 2-D numerical analysis of near-field flow at low-crested permeable breakwaters. *Coast. Eng.* 51, 991–1020. doi:10.1016/j.coastaleng.2004.07.017
- Green, D.S., Chapman, M.G., Blockley, D.J., 2012. Ecological consequences of the type of rock used in the construction of artificial boulder-fields. *Ecol. Eng.* 46, 1–10. doi:10.1016/j.ecoleng.2012.04.030
- Harlow, D., 2013. Non-Standard Rock Groynes in Poole and Christchurch Bays.
- Hawkins, S., Hartnoll, R., 1983. Changes in a Rocky Shore Community: An Evaluation of Monitoring. *Mar. Environ. Res.* 9, 131–181.
- Hawkins, S.J., 2012. Marine conservation in a rapidly changing world. *Aquat. Conserv. Mar. Freshw. Ecosyst.* 22, 281–287. doi:10.1002/aqc.2239
- Hawkins, S.J., 1981. The influence of season and barnacles on the algal colonization of *Patella vulgata* exclusion areas. *J. Mar. Biol. Assoc. United Kingdom* 61, 1–15. doi:10.1017/S0025315400045872
- Hu, Z., Suzuki, T., Zitman, T., Uittewaall, W., Stive, M., 2014. Laboratory study on wave dissipation by vegetation in combined current-wave flow. *Coast. Eng.* 88, 131–142. doi:10.1016/j.coastaleng.2014.02.009
- Hutchinson, N., Williams, G., 2003. Disturbance and subsequent recovery of mid-shore assemblages on seasonal, tropical, rocky shores. *Mar. Ecol. Prog. Ser.* 249, 25–38. doi:10.3354/meps249025
- Jackson, a. C., Chapman, M.G., Underwood, a. J., 2008. Ecological interactions in the provision of

- habitat by urban development: Whelks and engineering by oysters on artificial seawalls. *Austral Ecol.* 33, 307–316. doi:10.1111/j.1442-9993.2007.01818.x
- Jenkins, S.R., Coleman, R. a., Della Santina, P., Hawkins, S.J., Burrows, M.T., Hartnoll, R.G., 2005. Regional scale differences in the determinism of grazing effects in the rocky intertidal. *Mar. Ecol. Prog. Ser.* 287, 77–86. doi:10.3354/meps287077
- Johnson, M.P., Frost, N.J., Mosley, M.W.J., Roberts, M.F., Hawkins, S.J., 2003. The area-independent effects of habitat complexity on biodiversity vary between regions. *Ecol. Lett.* 6, 126–132. doi:10.1046/j.1461-0248.2003.00404.x
- Jonsson, P., Granhag, L., Moschella, P., Åberg, P., Hawkins, S., Thompson, R., 2006. Interactions between wave action and grazing control the distribution of intertidal macroalgae. *Ecology* 87, 1169–1178.
- Jung, T.-H., Lee, S.-J., Cho, Y.-S., 2012. Characteristics of Wave Reflection for Vertical and Slit Caissons with Porous Structures. *J. Appl. Math.* 2012, 1–15. doi:10.1155/2012/972650
- Kamphuis, J.W., 2010. *Introduction to Coastal Engineering and Management*, 2nd ed. Advanced Series on Coastal Engineering, 30. World Scientific.
- Koraim, a. S., Rageh, O.S., 2013. Hydrodynamic performance of vertical porous structures under regular waves. *China Ocean Eng.* 27, 451–468. doi:10.1007/s13344-013-0039-3
- Liquete, C., Zulian, G., Delgado, I., Stips, A., Maes, J., 2013. Assessment of coastal protection as an ecosystem service in Europe. *Ecol. Indic.* 30, 205–217. doi:10.1016/j.ecolind.2013.02.013
- Losada, I., Losada, M., Martin, F., 1995. Experimental study of wave-induced flow in a porous structure. *Coast. Eng.* 26, 77–98.
- Lowe, R.J., 2005a. Oscillatory flow through submerged canopies: 1. Velocity structure. *J. Geophys. Res.* 110, C10016. doi:10.1029/2004JC002788
- Lowe, R.J., 2005b. Oscillatory flow through submerged canopies: 2. Canopy mass transfer. *J. Geophys. Res.* 110, C10017. doi:10.1029/2004JC002789
- MAFF, 2000. *Shoreline Management Plans. A guide for coastal.* Draft for Consultation July 2000.
- Maggs, C.A., Blomster, J., Mineur, F., Kelly, J., 2007. *Green Seaweeds of Britain and Ireland.* British Phycological Society, London.
- Martínez, M.L., Intralawan, a., Vázquez, G., Pérez-Maqueo, O., Sutton, P., Landgrave, R., 2007. The coasts of our world: Ecological, economic and social importance. *Ecol. Econ.* 63, 254–272. doi:10.1016/j.ecolecon.2006.10.022
- Martins, G.M., Thompson, R.C., Neto, A.I., Hawkins, S.J., Jenkins, S.R., 2010. Enhancing stocks of the exploited limpet *Patella candei* d'Orbigny via modifications in coastal engineering. *Biol. Conserv.* 143, 203–211. doi:10.1016/j.biocon.2009.10.004
- Monismith, S.G., 2007. Hydrodynamics of Coral Reefs. *Annu. Rev. Fluid Mech.* 39, 37–55. doi:10.1146/annurev.fluid.38.050304.092125
- Moschella, P.S., Abbiati, M., Åberg, P., Airolidi, L., Anderson, J.M., Bacchiocchi, F., Bulleri, F., Dinesen, G.E., Frost, M., Gacia, E., Granhag, L., Jonsson, P.R., Satta, M.P., Sundelöf, a., Thompson, R.C., Hawkins, S.J., 2005. Low-crested coastal defence structures as artificial habitats for marine life: Using ecological criteria in design. *Coast. Eng.* 52, 1053–1071. doi:10.1016/j.coastaleng.2005.09.014
- Naylor, L., Venn, O., Coombes, M., 2011. *Including Ecological Enhancements in the Planning, Design and Construction of Hard Coastal Structures: A process guide.* Rep. to Environ.
- Nicholls, R., Mimura, N., 1998. Regional issues raised by sea-level rise and their policy implications. *Clim. Res.* 11, 5–18.
- Nicholls, R.J., 1988. Profile Characteristics of Shingle Beaches, in: 2nd European Workshop on

Coastal Zones.

- Philippart, C.J.M., Anadón, R., Danovaro, R., Dippner, J.W., Drinkwater, K.F., Hawkins, S.J., Oguz, T., O'Sullivan, G., Reid, P.C., 2011. Impacts of climate change on European marine ecosystems: Observations, expectations and indicators. *J. Exp. Mar. Bio. Ecol.* 400, 52–69. doi:10.1016/j.jembe.2011.02.023
- Raffaelli, D., Hawkins, S.J., 1996. *Intertidal Ecology*, First. ed. Kluwer Academic Publishers, The Netherlands.
- Roebeling, P., Coelho, C., Reis, E., 2011. Coastal erosion and coastal defense interventions : a cost-benefit analysis Coastal erosion and coastal defense interventions : a cost-benefit analysis. *J. Coast. Res.* 1415–1419.
- Silva, A.C.F., Hawkins, S.J., Boaventura, D.M., Thompson, R.C., 2008. Predation by small mobile aquatic predators regulates populations of the intertidal limpet *Patella vulgata* (L.). *J. Exp. Mar. Bio. Ecol.* 367, 259–265. doi:10.1016/j.jembe.2008.10.010
- Silva, R., Losada, I., Losada, M., 2000. Reflection and transmission of tsunami waves by coastal structures. *Appl. Ocean Res.* 22, 215–223.
- Sousa, W., 1979. Experimental investigations of disturbance and ecological succession in a rocky intertidal algal community. *Ecol. Monogr.* 49, 227–254.
- Tsinker, G.P., 2004. *Port engineering: planning, construction, maintenance and security*. Hoboken: John Wiley & Sons.
- Tyhurst, M., 1986. *Rubble groynes at Christchurch, Dorset: Four case histories*. Christchurch, UK.