

Five Facets of 6G: Research Challenges and Opportunities

LI-HSIANG SHEN and KAI-TEN FENG, Department of Electronics and Electrical Engineering, National Yang Ming Chiao Tung University, Taiwan

LAJOS HANZO, Department of Electronics and Computer Science, University of Southampton, U.K.

Whilst the fifth-generation (5G) systems are being rolled out across the globe, researchers have turned their attention to the exploration of radical next-generation solutions. At this early evolutionary stage we survey five main research facets of this field, namely *Facet 1: next-generation architectures, spectrum and services*, *Facet 2: next-generation networking*, *Facet 3: Internet of Things (IoT)*, *Facet 4: wireless positioning and sensing*, as well as *Facet 5: applications of deep learning in 6G networks*. In this paper, we have provided a critical appraisal of the literature of promising techniques ranging from the associated architectures, networking, applications as well as designs. We have portrayed a plethora of heterogeneous architectures relying on cooperative hybrid networks supported by diverse access and transmission mechanisms. The vulnerabilities of these techniques are also addressed and carefully considered for highlighting the most of promising future research directions. Additionally, we have listed a rich suite of learning-driven optimization techniques. We conclude by observing the evolutionary paradigm-shift that has taken place from pure single-component bandwidth-efficiency, power-efficiency or delay-optimization towards multi-component designs, as exemplified by the twin-component ultra-reliable low-latency mode of the 5G system. We advocate a further evolutionary step towards multi-component Pareto optimization, which requires the exploration of the entire Pareto front of all optimal solutions, where none of the components of the objective function may be improved without degrading at least one of the other components.

CCS Concepts: • **General and reference** → **Surveys and overviews**; • **Networks** → **Network architectures**; *Cross-layer protocols*; • **Computing methodologies** → *Machine learning*.

Additional Key Words and Phrases: 5G, 6G, communications and networking, next-generation, IoT, positioning and sensing, deep learning.

ACM Reference Format:

Li-Hsiang Shen, Kai-Ten Feng, and Lajos Hanzo. 2022. Five Facets of 6G: Research Challenges and Opportunities. *ACM Comput. Surv.* 0, 0, Article 0 (November 2022), 37 pages. <https://doi.org/XXXXXXXX.XXXXXXX>

¹L. Hanzo would like to acknowledge the financial support of the Engineering and Physical Sciences Research Council projects EP/W016605/1 and EP/P003990/1 (COALESCE) as well as of the European Research Council's Advanced Fellow Grant QuantCom (Grant No. 789028). K.-T. Feng would like to acknowledge the financial support of by Ministry of Science and Technology (MoST) Grants 110-2221-E-A49-041-MY3, 110-2221-E-A49-027-MY2, 111-2218-E-A49-024, 111-3114-E-A49-001, STEM Project, the National Defense Science and Technology Academic Collaborative Research Project in 2022, and Higher Education Sprout Project of the National Yang Ming Chiao Tung University and Ministry of Education (MoE), Taiwan. (Corresponding Authors: Kai-Ten Feng and Lajos Hanzo)

Authors' addresses: Li-Hsiang Shen, gp3xu4vu6.cm04g@nctu.edu.tw; Kai-Ten Feng, ktfeng@nycu.edu.tw, Department of Electronics and Electrical Engineering, National Yang Ming Chiao Tung University, Hsinchu, Taiwan, 300093; Lajos Hanzo, lh@ecs.soton.ac.uk, Department of Electronics and Computer Science, University of Southampton, Southampton, U.K., SO17 1BJ.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2022 Association for Computing Machinery.

0360-0300/2022/11-ART0 \$15.00

<https://doi.org/XXXXXXXX.XXXXXXX>

Table 1. Key Requirement Comparison of 5G and 6G

	5G	6G
Application services	<ul style="list-style-type: none"> ✓ eMBB ✓ URLLC ✓ mMTC 	<ul style="list-style-type: none"> ✓ eUMBB ✓ eURLLC ✓ UmMTC ✓ LDHMC ✓ ELPC
Communication network architecture	<ul style="list-style-type: none"> ✓ 5G-NR cellular ✓ mmWave network 	<ul style="list-style-type: none"> ✓ AI-empowered network ✓ Aerial network ✓ Terrestrial network ✓ Underwater network ✓ mmWave/THz network
Transmission spectrum usage	<ul style="list-style-type: none"> ✓ sub-6 GHz (2.4/3.5/5 GHz) ✓ mmWave (28/39/60 GHz) 	<ul style="list-style-type: none"> ✓ sub-6GHz (2.4/3.5/5 GHz) ✓ mmWave (28/39/60 GHz) ✓ THz (Above-100GHz) ✓ Laser ✓ VLC ✓ Non-RF
Peak data rate	20 Gbps	1 Tbps
Latency requirement	1 ms	0.01–0.1 ms
Reliability demands	99.999 %	99.99999999 %
Connectivity density	10^6 devs/km ²	10^7 devs/km ²
Mobility support	500 km/hr	≥ 1000 km/hr
Area spectral efficiency compared to 5G	1×	10×
Energy efficiency compared to 5G	1×	100×

1 INTRODUCTION

With the rapid revolution of cloud computing, network function virtualization, and the concept of software-defined networks (SDNs) [102] under fifth-generation (5G) umbrella, a paradigm-shift towards the sixth-generation (6G) of mobile communications is observed [170]. In this era, future networks are no longer confined to conventional terrestrial cellular architectures, they are evolving towards a hybrid terrestrial-underwater-aerial-space network [96, 276]. Hence, the requirements of 6G are compared to those of the existing 5G networks in Table 1. Although 6G performance indicators are not formally finalized at the time of writing, we introduce the potential target specifications from the open literature. The corresponding stringent service demands in 6G include a peak rate of 1 Tbps, system latency lower than 0.1 ms, reliability of 99.9999999%, user velocity higher than 1000 km/hr, and unprecedented densities of devices per square kilometer [75, 120, 189, 251, 276]. In comparison to the existing 5G system, the 6G system will require much improved energy efficiency and area spectral efficiency [189, 227, 251]. These specifications will be able to support smooth, resilient and high-quality services in a hybrid network.

In this context, a whole raft of pivotal issues have to be addressed, such as cloud storage, the underlying computing architecture, computing resource management, multimedia streaming technologies, SDN, and network function virtualization [189, 251]. The rapid development of artificial intelligence (AI) as a powerful optimization tool and deep learning has facilitated the solution of highly complex problems in conventional systems [35, 178]. Advances in wireless positioning and sensing [83] and the Internet of Things (IoT) [15, 20] have facilitated large-scale data collection both across the industrial sectors and in the home with the prospect of supporting sophisticated new applications of 6G mobile networks. However, the massive tele-traffic forecast also leads to

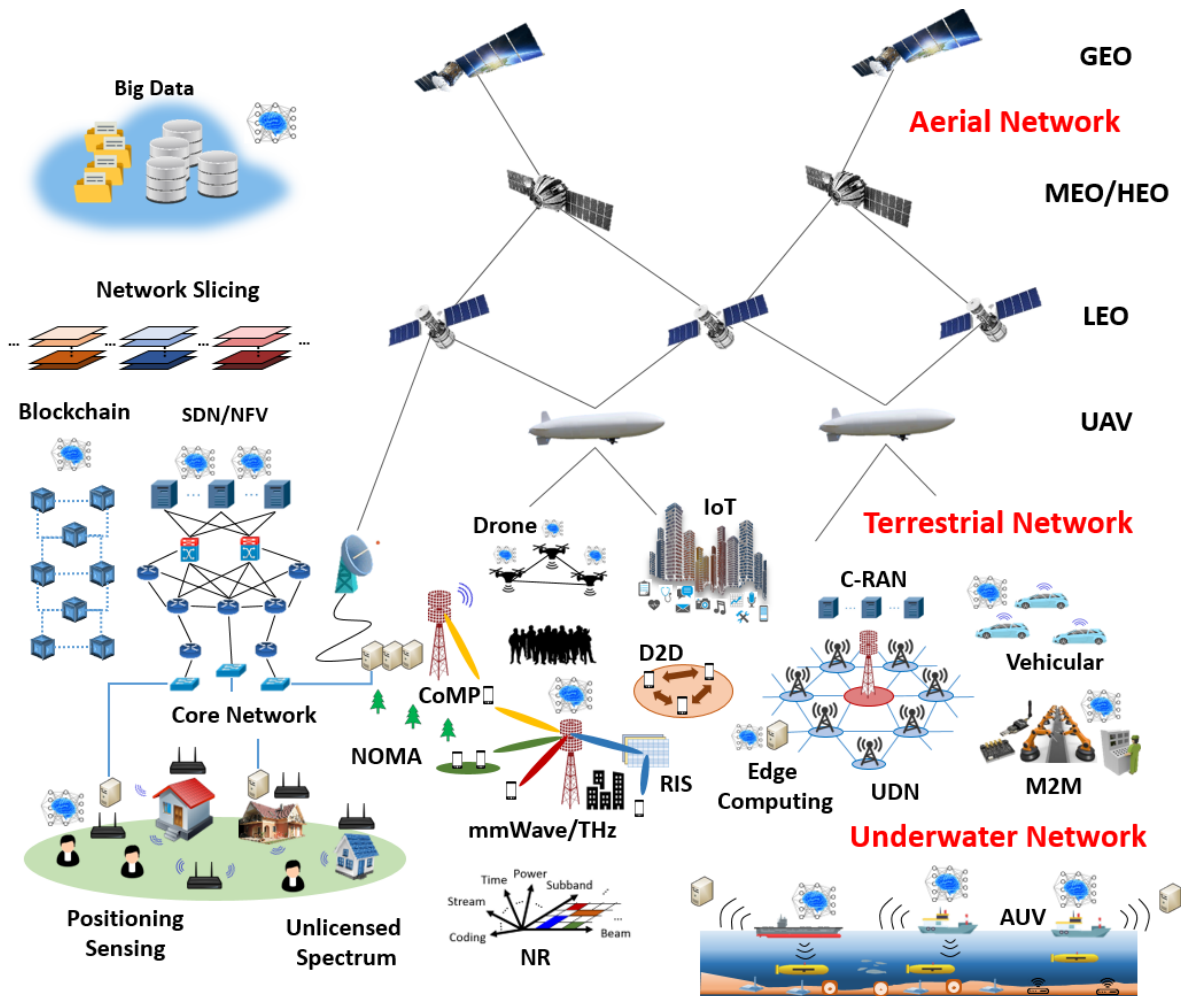


Fig. 1. The architecture of AI-empowered 6G communication networking technologies includes next-generation wireless communications for aerial, terrestrial, and underwater networks. Aerial network contains GEO, MEO, LEO, UAV and drones. Terrestrial network includes V2X, C-RAN, M2M, UDN, D2D, IoT, mmWave/THz and core network, which are enabled by edge computing, RIS, NOMA, CoMP, NR, unlicensed spectrum usage, positioning and sensing, blockchain, SDN/NFV, network slicing, and big data techniques. Underwater network is formed by groups of vessels and AUVs conducting sensing and data collection missions.

potential network security and privacy challenges. Accordingly, advanced information and security solutions have to be designed for supporting these novel network architectures, which are shown at a glance in Fig. 1 and will be elaborated in the following sections. Against the above backdrop, this article aims for surveying the most promising 6G research topics evolving from the 5G technologies, which are captured at a glance in Fig. 2. The main research issues include a whole raft of **Next-Generation Architecture, Spectrum and Services, Next-Generation Networking, the Internet of Things, Wireless Positioning and Sensing**, as well as the **Applications of Deep Learning in 6G Networks**. The open research issues of 6G communication

Table 2. Comparison with Available Surveys and Tutorials

Paper	[51]	[120]	[189]	[35]	[231]	[75]	[121]	[217]	[162]	[226]	This work
Year	2019	2019	2019	2019	2020	2020	2021	2021	2021	2022	2022
Type	Survey	Tutorial	Survey	Tutorial	Tutorial	Survey	Survey	Survey	Survey	Survey	Survey
Netw. Architecture		✓	✓		✓	✓		✓	✓	✓	✓
Wireless Transmission		✓	✓	✓	✓	✓		✓	✓	✓	✓
Unlicensed Spectrum					✓	✓				✓	✓
Multi-Service Use Cases		✓	✓							✓	✓
Softwarization SDN/NFV	✓	✓						✓	✓	✓	✓
IoT and Security	✓	✓		✓	✓	✓			✓	✓	✓
Positioning & Sensing	✓				✓		✓				✓
Learning Wireless/Netw.	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Multi-Component Opt.					✓						✓

and networking are also summarized in Table 3. Note that in Table 3 6G facets 1–4 are discussed with open research issues. In a nutshell, our contributions can be summarized as follows:

- Relying on recent research results, we have sorted out the key performance metrics as well as five service use cases of 6G compared to 5G system. We have investigated comprehensive literature surveys for the potential promising techniques from the perspectives of architectures, networking, applications as well as scheme designs, which are extended from the current foundation of wireless and networking.
- Furthermore, we discuss the inherent characteristics by highlighting unique and promising next-generation architecture, spectrum and services. We portray a plethora of heterogeneous architectures with integrated hybrid networks under different accessing and transmission mechanisms. The vulnerabilities of the corresponding techniques in their regions are also addressed and carefully considered for future research directions.
- We also investigate a plentiful suite of learning-driven optimization and solutions for the above-mentioned open issues. Depending on each case and its requirement, different machine and deep learning schemes should be intelligently and favorably exploited as a remedy shown in the open literature.
- We have demonstrated some substantial field trial performances regarding high-frequency mechanism, IoT communication and sensing as well as deep learning-driven device-free indoor positioning and sensing detection techniques.
- Owing to future complex network scenarios with quite different requirements, we elaborate the road from single-component to multi-component Pareto-optimization principle, which differentiates conventional methods and carries out potentially encountered trade-offs among numerous factors, such as rate, bandwidth, energy, latency and complexity, etc.

Indeed, there exist other 6G research surveys and tutorials published in [35, 51, 75, 120, 121, 162, 189, 217, 226, 231]. However, to the best of our knowledge, this survey has provided a more comprehensive next-generation overview of network architectures and applications as well as optimization. Additionally, our paper offers a cross-disciplinary synthesis ranging from whole network layers, which is explicitly contrasted to the existing works in Table 2 for identifying the difference in the open literature.

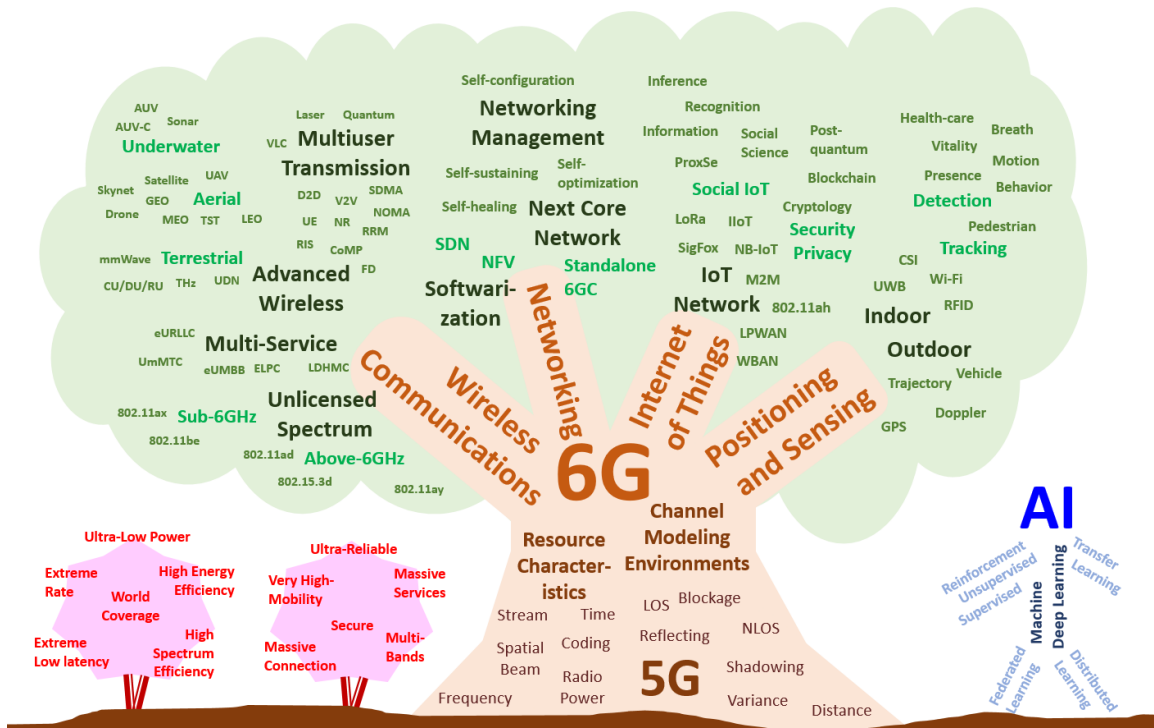


Fig. 2. Nature of 6G technologies. Stemming from 5G with the root of resource characteristics and channel modeling environments, the 6G trunk includes technology branches of wireless communications, networking, Internet of Things, and positioning and sensing. The leaves and foliage of promising 6G architectures and techniques are nourished in its belonging branches from the 5G roots nourished by the human being so-called AI. Accordingly, the performance flowers are vigorously growing up shading below the lush 6G tree.

2 FACET 1: NEXT-GENERATION ARCHITECTURE, SPECTRUM AND SERVICES

2.1 Advanced Wireless Network Architecture and Technology

The forthcoming 6G wireless network is expected to evolve beyond the conventional terrestrial cellular network by additionally including underwater, aerial and satellite communication networks, forming a vertical 3D network (so-called 3DNet or SkyNet) [68, 96] as seen in the stylized illustration of Fig. 1. Accordingly, the management of these emerging heterogeneous vertical/horizontal massive ultra-dense networks (UDN) becomes one of the key research topics. The conventional cloud radio access network (C-RAN) [185] relies on fully centralized network functions, computations, decisions and operations in the central cloud, which is insufficiently flexible for future networks. Accordingly, based on the associated network functions, 6G *terrestrial communication networks* partition the traditional base stations (BSs) of the C-RAN into the central unit (CU), distributed units (DUs), and radio units (RUs). This partitioning requires flexible radio access technology (RAT) [118]. The powerful CU in the cloud has substantial computation and data storage capabilities managed by the higher network layers, whilst the network functions of the lower layers are deployed within multiple DUs at the edge. The RUs are responsible for signal transmission and reception, while the networking policy is formulated at the DUs and CU. Furthermore, instead of using traditional costly wired links, the fronthaul and backhaul of flexible CU/DU/RU architectures

Table 3. Open Research Issues of 6G Communication and Networking Technologies

<i>Next-Generation Architecture, Spectrum and Services</i>	
Advanced wireless networks	<ul style="list-style-type: none"> ✓ Interference management in hybrid 6G networks ✓ Dynamic spectrum management for different wireless transmissions ✓ High-mobility handover management (e.g., vehicle, train, UAV, AUV, etc.) ✓ Network power control and energy harvesting ✓ Flexible scheduling for integrated RAT
New multiuser transmission	<ul style="list-style-type: none"> ✓ Enhanced RRM for diverse resources (e.g., code, space, frequency, time, etc.) ✓ New UM-MIMO beamforming for mmWave and THz ✓ Spectrum/Energy efficient techniques (e.g., NOMA, FD, CoMP, etc.) ✓ Advanced grant-free transmissions ✓ Deployment and optimization of RIS ✓ Non-RF techniques (e.g., laser, VLC, quantum communications, etc.)
Unlicensed spectrum access	<ul style="list-style-type: none"> ✓ Interference mitigation for unlicensed spectrum accessing (e.g., LAA) ✓ Re-transmission mechanism at higher frequency bands ✓ New multiuser orthogonal contention and data transmission schemes ✓ Advanced unlicensed 60 GHz beamforming design for 802.11ad/ay
Multiple wireless services	<ul style="list-style-type: none"> ✓ High performance hybrid services (e.g., URLLC-eMBB) ✓ Front-end resource allocation and hybrid numerology optimization ✓ Management of new 6G services of LDHMC and ELPC
<i>Next-Generation Networking</i>	
Network softwarization	<ul style="list-style-type: none"> ✓ Advanced automatic network traffic optimization and service management ✓ Flexible and cost-effective network function deployment ✓ New NFV management and orchestration
Next-generation core	<ul style="list-style-type: none"> ✓ Next-generation core virtualization ✓ QoS-guaranteed virtual networks
Mobile network management	<ul style="list-style-type: none"> ✓ Resource management for mobile cloud and edge computing ✓ Advanced SDN/NFV-enabled SON
<i>Internet of Things</i>	
IoT networks	<ul style="list-style-type: none"> ✓ Efficient mechanisms for sensing and data collection and upload ✓ Simultaneous operation among different IoT protocols ✓ Advanced power preservation, interference management and synchronization ✓ Cloud resource management and big data storage and processing ✓ Advanced social IoT network structure for information dissemination and recognition
Vehicular networks	<ul style="list-style-type: none"> ✓ Wireless channel characteristic and resource management of V2X ✓ Heterogeneity management over different V2X protocols and interfaces ✓ Advanced optimization of joint sensing, control and communications ✓ Efficient and effective vehicular routing and trajectory design ✓ Congestion control and secured and reliable IoT-V2X
Security and Privacy	<ul style="list-style-type: none"> ✓ Next-generation quantum and post-quantum cryptology ✓ Implementations/Applications of multifunctional security and privacy techniques ✓ Blockchain on advanced data security and system operation ✓ Enhancement in physical layer security ✓ Privacy-aware strategies in smart services and cloud/edge networks
<i>Wireless Positioning and Sensing</i>	
Wireless positioning and sensing	<ul style="list-style-type: none"> ✓ Flexible, robust and high-precision trajectory tracking ✓ Doppler shift of high-speed and long-distance outdoor positioning ✓ Device-free CSI-based positioning, sensing, and detection ✓ Fine-grained positioning and detection in extreme environments ✓ Fine-grained positioning and detection in extreme environments ✓ Multi-scale human behavior and vitality detection

may rely on high-speed millimeter wave (mmWave) and terahertz (THz) techniques [182]. Similarly, both the user equipment (UE) and sensors are supported by high-speed mmWave THz radio links.

- **mmWave Transmission:** As a benefit of its ample bandwidth, a mmWave system typically operating at 28/39/60 GHz is capable of supporting Gbps-level transmission [174, 181, 198]. However, this is achieved at a high pathloss and sensitivity to blockages. As a potential remedy, beamforming relying on high-gain beams may be harnessed for mitigating the pathloss [181].

- **THz Transmission:** The THz band represents the carrier frequencies spanning from 0.1 to 1 THz, which has even wider bandwidth resources than the mmWave band. Hence, it is potentially capable of supporting Tbps transmission speeds [182, 276]. However, it suffers from significantly higher pathloss than mmWave carriers due to severe molecular absorption. Therefore, it requires massive antennas to support so-called THz-oriented pencil-beams [60, 99]. In this context, THz beam-alignment is an excessively challenging task, especially in the face of mobility in a short-distance THz communications. Moreover, directional THz-enabled cognitive radio (CR) aided transceivers are capable of dynamically exploiting the slivers of unoccupied spectrum for improving the area spectral efficiency.

The 6G architecture of *underwater communication networks* has the task of supporting autonomous underwater vehicles (AUVs) and AUV controllers (AUVCs) [132], which can be harnessed in diverse scenarios, including underwater air crash investigations, military applications, and deep sea exploration. The AUV-based network supports multiple AUVs and multiple AUVCs equipped with sensors and sonar/camera systems for collaborative navigation, localization, and object tracking. However, underwater communications rely on ultra-low frequencies, which are affected by water flow, the Doppler effect of ships, environmental noise, and vortex-induced water vibration. The mitigation of these phenomena requires substantial further research in 6G underwater networks.

Aerial communications in 6G rely on drones or unmanned aerial vehicles (UAVs) and low/high altitude platforms (LAPs/HAPs). Furthermore, the 6G satellite network contains several layers in Fig. 1, including the low earth orbit (LEO) satellites below 2000 kilometers, medium earth orbit (MEO), high earth orbit (HEO), and geostationary earth orbit (GEO) satellites at 36,000 kilometers [96, 214]. Due to the long transmission distance from the satellite to ground, high transmit power is required for mitigating the pathloss and specialized terrestrial-space terminals (TSTs) have to be used. For efficiently collecting information, multiple UAVs and multiple satellites may cooperatively transfer their data forming a heterogeneous integrated ground-air-space (IGAS) network [48]. However, numerous mobility-related factors should be taken into account, such as the roll/pitch/yaw movement of UAVs and the high-velocity orbiting of LEO and MEO satellites are challenging issues to be tackled [106, 147]. But again, the UAVs and satellites are capable of substantially improving the coverage quality [106, 147].

As an evolution from conventional BS-centric networking, user-centric cell-free networks [13] have become popular, which judiciously allocate the network's resources according to the specific quality of service (QoS) requirements of the UE. As a benefit of this user-centric philosophy, amorphous coverage areas are created by assigning the access points inhomogeneously by matching their density to the non-uniform user-density. Hence, they exhibit excellent load-balancing capability. The network determines its resource-allocation strictly based on the QoS requirements [3]. However, achieving this ambitious design objective, while handling diverse cell-sizes, ranging from small cells (SCs) to femtocells, picocells and the emerging nanocells [186], requires substantial further research in the context of 6G networks. To elaborate a little further, a host of sophisticated interference management, dynamic channel allocation, high-mobility handover, packet admission control, power control, and scheduling have to be investigated. Furthermore, the nodes operating in remote areas, where no electricity is available have to rely on advanced energy harvesting and wireless power transfer in next-generation wireless communications [6, 176, 201].

2.2 New Multiuser Transmission Schemes

Conventional transmission techniques tend to focus on improving their resource efficiency in time, frequency, and spatial domains. The 6G new radio (NR) will further extend these techniques to the mmWave and THz bands [182], whilst relying on ultra-massive multiple input multiple output (UM-MIMO) beamforming techniques [41, 199]. By relying on these techniques, multiple beams can be generated to serve numerous users in different directions at diverse QoS requirements. However, sophisticated power control, interference management and radio resource management (RRM) are required. Moreover, in order to improve the spectral- versus energy-efficiency trade-off,

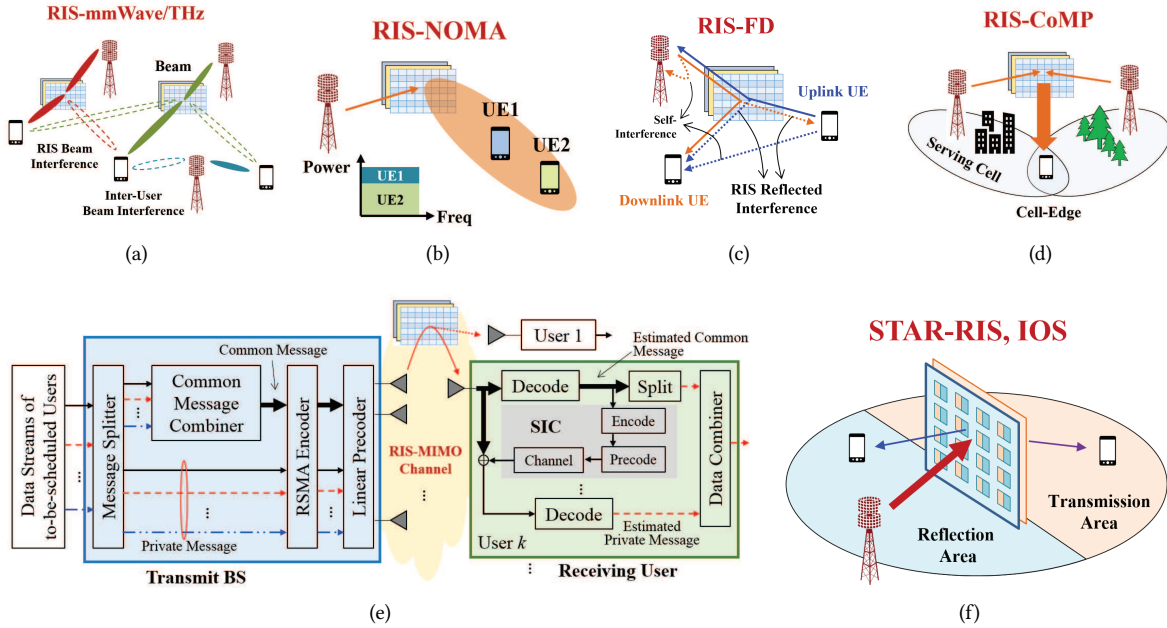


Fig. 3. The 6G RIS-empowered wireless network of (a) RIS-empowered mmWave/THz (b) RIS-NOMA (c) RIS-FD and (d) RIS-CoMP transmissions as well as emerging architecture of (e) RSMA and (f) STAR-RIS/IOS.

we can superpose all signals in the time, frequency and spatial resource slots. The corresponding techniques include non-orthogonal multiple access (NOMA) [123], 3D beamforming, full-duplex (FD) [66], coordinated multi-point (CoMP) transmission/reception [36], and rate splitting multiple access (RSMA) [47].

- **NOMA**: The transmitter will multiplex several desired signals to a single resource slot of certain resource domains, whilst the receiver carries out successive interference cancellation (SIC) for mitigating the interference imposed by the signals belonging to other users. In the most of popular power-domain NOMA two or more users' signals are superimposed at a given power and SIC is used to detect the strongest signal, while considering the weaker signals as interference. The remodulated signal is then deducted from the aggregate signal, leaving the clean/weaker signal behind [11, 56, 149]. Similar SIC-aided procedures are used also for code-domain NOMA. A whole plethora of other NOMA solutions can be found in [53, 142]. However, it becomes a potential challenge to design advanced NOMA techniques in terms of integrating the diverse resource domains of mmWave/THz systems [54, 267], cancelling the interference in UDNs, or enhancing the coverage area of UAV and satellite networks [73, 109].
- **3D Beamforming**: This concept emerges from that of sectorized antennas aiming for serving users roaming at different angles with the aid of sophisticated beamforming techniques and antenna configurations. Since mmWave carriers suffer from excessive pathloss, the employment of high-gain beamforming is critical. High-gain beamforming is even more crucial for THz carriers relying on pencil beams. Furthermore, it is of salient importance to frugally manage the limited 3D resources for supporting diverse QoS requirements under IGAS networks.
- **FD**: This technique allows simultaneous uplink and downlink transmission within a single timeslot at the same frequency [66, 124]. However, the interference imposed by the high transmit power on the low

received power is a critical issue, which requires advanced self-interference mitigation techniques. With the emergence of powerful new 6G architectures and technologies, there is an opportunity for FD solutions to increase the spectral efficiency by employing mmWave/THz UM-MIMO beamforming in both terrestrial and aerial networks [12, 187, 229].

- **CoMP:** This technique supports simultaneous transmissions from multiple BSs to a single receiver [98]. Furthermore, as a benefit of mmWave/THz beamforming, UM-MIMO CoMP is capable of increasing the network's throughput [148, 225]. Nonetheless, there are substantial challenges in the way of large-scale CoMP roll-out, such as the related synchronization issues, because the receiver can only be perfectly synchronized with a single BS.
- **RSMA:** As depicted in Fig. 3(e), considering the base stations having for example M transmit antennas and K users – each relying on a single receiver antenna – communicate under the assumption that in addition to the private and confidential messages destined for the individual users, there are also common messages to be received by all of the users. The terminology of rate-splitting of messages implies that the downlink stream is partitioned into K segments for the K users, where each user's message contains both a common and a private message segments. The K private messages of the individual users are then jointly transmitted with the common message of all users. Both the common and private messages are transmitted in the downlink by the BS having M downlink transmit antennas, but naturally, the antenna-array weights used for the transmit precoding (TPC) private messages depend on the individual user positions, while those used for the common part are trained for reaching all users [46, 47, 134, 150].

At the users, the common message is detected first by assuming that the private messages are unknown and hence they can only be treated as additional noise. In the next processing step, we aim for cancelling the interference imposed by the common message on the composite received signal using SIC. This is achieved by first remodulating the common message detected as well as applying the TPC to its modulated version and then subtracting the result from the composite received signal. This leaves the superimposed private messages behind. Now each user has to extract his/her own private message following a similar SIC process as outlined above. Explicitly, each user detects his/her own private signal by treating all the other users' signals as noise. This is because the TPC weights of the other users are unknown and hence their interference cannot be cancelled. Suffice to say that the above rudimentary portrayal of the RSMA philosophy relies on a number of simplifying assumptions, which are eliminated in the detailed treatises of [17, 18].

Reconfigurable intelligent surfaces (RISs) also constitute promising techniques for extending the coverage area, reducing the power consumption, and enhancing the data rates [16, 27, 55, 95, 244]. The RIS is composed of numerous metamaterial elements, which can reflect the received waves, while adjusting their phases without complex signal processing [55] as detailed below.

- **RIS-Empowered mmWave/THz Transmissions:** The fixed BS infrastructure can beamform its mmWave/THz signals to the RIS, which may reflect them to arbitrary transmit directions [24, 86, 93], as demonstrated in Fig. 3(a). Blocking the line-of-sight (LOS) paths of mmWave/THz carriers may be circumvented with the aid of RISs. However, they create extra interference, which has to be carefully managed. In this context, it is imperative to jointly design the active beamforming at the BS and the passive phase shift based beamforming at the RIS in order to meet different requirements.
- **RIS-Empowered Multiuser Transmissions:**
 - (1) **RIS-NOMA:** Again, multiuser NOMA schemes impose extra interference due to the superposed signals of the 3D resource domains. The RIS deployment shown in Fig. 3(b) has the potential of generating specific channel features for readily distinguishing the overlapped NOMA signals. Moreover, RIS-NOMA [27, 90, 139, 254] is capable of extending the coverage area to provide services for distant cell-edge users.

However, the joint design of the different resource domains of NOMA and RIS constitutes a wide open research issue.

(2) **RIS-FD**: As for FD transmission, RISs are capable of adjusting their phase shifts to cancel or alleviate the self-interference of FD [62], where the uplink and downlink signals may become orthogonal in terms of their directions as demonstrated in Fig. 3(c). The RISs are intrinsically operated at FD which directly reflect arbitrary incident signals. We note that the FD transmission here indicates the co-existence of two transmission directions in the wireless network, including downlink signals from BS to UE and simultaneous uplink access in a reverse direction. However, additional interference emerges from the RISs, which should be jointly considered in RIS-FD design [65, 110]. The joint design of FD and RIS configurations may achieve potentially higher area spectral efficiency than conventional FD operating without RIS assistance.

(3) **RIS-CoMP**: Conventional CoMP aims for improving the low signal quality of cell-edge users. This is achieved by turning the harmful interference into useful source of desired signal energy with aid of RIS-CoMP [61], as seen in Fig. 3(d). As a benefit, the transmitter is capable of dissipating less power than conventional CoMP while still meeting the tele-traffic demands. Accordingly, CoMP-RIS should be jointly designed for improving the area spectrum/energy efficiency. However, there are numerous open problems, including their BS backbone bottlenecks, channel estimation and synchronization, just to mention a few. Again, it is not possible to perfectly synchronize a UE with more than one BS.

- **Simultaneous Transmitting and Reflecting RISs (STAR-RIS)**: An impediment of the conventional RIS solutions is that the transmitter and the user have to be within the same 180-degree half-plane, rather than roaming across the entire 360-degree full plane. By contrast, the STAR-RIS architecture as illustrated in Fig. 3(f), or termed as intelligent omni-surface (IOS), allows full-plane coverage by potentially harnessing full reflection, full transmission, as well as simultaneous transmission and reflection [141, 156]. These modes were discussed in [141] with special emphasis on NTT DOCOMO's prototype. There are three different principles governing their operations, namely the so-called energy-splitting, partitioning and time-switching types, which have their different pros and cons [141]. In the energy-splitting mode the signal impinging upon an element is partially reflected and transmitted. By contrast, the partitioning type may be viewed as having a reflection-only and transmission-only segment of reduced sizes. Finally, the time-switching type is capable of switching the reflective elements between the transmit and reflect modes. There is a huge variety of compelling applications scenarios, such as STAR-RIS-NOMA [242], STAR-RIS-CoMP [91] and multi-STAR-RIS deployment as well as AI-assisted STAR-RIS [277], which require further exploration by the research community.

Furthermore, from an air-interface and transmission framing perspective, both multi-numerology, as well as mini-slot based and grant-free transmissions potentially make the systems more flexible in terms of reusing the time/frequency and spatial domain radio resources. However, several possible issues arise in the emerging 6G communication systems, which are elaborated as follows.

- **Multi-domain numerology**: Given the wide range of diverse applications and services, the multi-domain numerology defined in 5G new radio (5G-NR) enables flexible configuration of the time and frequency slots, where several resource elements can be specifically configured for meeting the QoS requirements encountered [131, 213]. However, this flexibility is attained at a potentially severe inter-domain interference [79, 203, 273]. With the emergence of 6G networks, advanced multi-domain numerology is required for defining a common air interface for supporting hybrid mmWave/THz and multiuser transmission schemes under the integrated 3D UDN philosophy.
- **Mini-slots**: As a similar concept to that of multi-domain numerology, the advanced philosophy of reserving mini-slots within a timeslot for prioritized latency-aware or reliability-aware services has emerged [151]. However, the provision of mini-slots is challenging due to the associated dynamic configuration required

by the multi-domain numerology aided multiuser transmission schemes. Furthermore, how to strike a beneficial compromise between the existing services and the emerging 6G applications and scenarios is a substantial open challenge.

- **Grant-free transmission:** Conventional grant-based uplink transmission imposes high latency owing to performing four-phase handshakes relying on access request, access grant, transmission, and acknowledgement [193]. By contrast, grant-free transmission facilitates direct uplink transmission under a simplified two-phase procedure of transmission and acknowledgement [2, 179, 192]. Despite the gradual maturing of this subject area, the conception of low-overhead grant-free transmission for hybrid multi-domain numerology and mini-slots requires dedicated community-effort. This is particularly urgent in the area of joint user-activity and channel estimation, as well as iterative synchronization and data detection [143, 234] for multiuser network architectures.
- **From OFDM to OTFS:** As part of the evolution of wireless communication through five generations the system capabilities have improved by orders of magnitude, in particular the achievable bit rate. The corresponding symbol durations have been reduced commensurately, which results in ever more dispersive channels requiring more powerful higher-order channel equalizers. As part of this trend, it became clear that using single-tap frequency-domain equalization as in OFDM is a more attractive solution for high-rate systems operating in dispersive channels than using excessive-order time-domain equalizers. As another dominant trend of the same era, the vehicular velocity has also been escalating and so did the carrier frequency, since high-rate high-bandwidth systems can only be accommodated at high carrier frequencies, where unused bandwidth is still available [81, 241]. This trend heralded the era of high-Doppler systems. Against this backdrop it is clear that a fundamental understanding of wireless propagation relying on the family of Bello-functions [76] is of pivotal significance. This is particularly in the context of high-velocity UAV, aeroplane and satellite communications, which is likely to become part of the space-air-ground integrated network (SAGIN) networking concept [137], or referred to as IGAS of the emerging 6G systems. In the associated high-mobility and high-Doppler contexts it becomes attractive to carry out the associated signal processing in the so-called delay-Doppler domain [76], rather than relying on the classic time-frequency-domain OFDM principles. This avenue of thought leads to the concept of orthogonal time-frequency space (OTFS) modulation transceivers [80, 205, 259], as detailed below. In simple tangible terms a linear time-invariant (LTI) system having a time-invariant channel impulse response (CIR) has an infinite coherence time, where each CIR tap remains constant versus time. Clearly, this is a dispersive CIR and its Fourier transform gives the frequency-domain channel transfer function (FDCHTF). But again, in practice CIR taps tend to fluctuate, even the receiver is stationary owing to the movements of people and objects, hence resulting in linear time-variant (LTV) channels which impose frequency shifts due to the Doppler effect, yielding frequency-domain dispersion. Recall that based on the Fourier transform, a non-dispersive Dirac-delta CIR results in a flat FDCHTF, which time-dispersive CIRs result in frequency-selective FDCHTF. By the same token, high-Doppler frequency-dispersive channels are time-selective and in reality the LTV channels of high-mobility scenarios are typically both time- and frequency-dispersive upon encountering long-delay CIRs and high-velocity, high-Doppler propagation scenarios. The classic OFDM systems tend to use adaptive bit-loading of the subcarriers of the 2D time-frequency plane, which have found their way into numerous systems, including the 4G and 5G systems. Instead, the more recent OTFS technique relies on the above-mentioned delay-Doppler (DD) domain and it is shown to be capable of outperforming OFDM, especially in high-Doppler SAGIN applications [250]. As a benefit of the sparse and quasi-stationary nature of the DD-domain, convenient low-overhead DD-domain channel estimation becomes possible [211], but there are numerous open problems to be addressed by future research in [210, 212, 250], such as the choice of the most appropriate near-capacity channel codes and multiple access techniques, just to name a few.

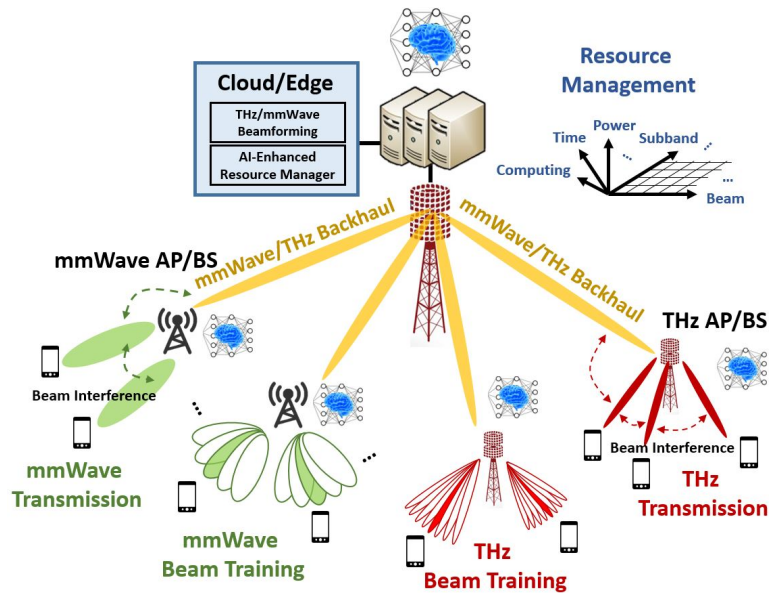


Fig. 4. The system architecture of coordinated THz/mmWave multiuser beamforming training.

In contrast to traditional radio transmission, advanced next-generation technologies will include non-radio frequency (Non-RF) solutions relying on laser based optical communications, visible light communications (VLC) and quantum communications [25, 44, 128, 236]. The pertinent research issues consist of power control and modulation design for laser based optical wireless communications (OWC) and VLC [271]. A detailed tutorial on quantum key distribution (QKD) designed for satellite channels may be found in [89] and in [171].

2.3 Unlicensed Spectrum Access

Given the thirst for bandwidth, there is a need for advanced bandwidth-efficient transmission techniques. Therefore, unlicensed spectrum accessing, including both the traditional sub-6 GHz frequencies and the mmWave band, has become an active research topic of next-generation networks [158]. In the unlicensed spectrum [158], interference mitigation becomes a particularly crucial research issue. The networks using unlicensed spectrum include licensed-assisted access (LAA) [31], IEEE 802.11ax [4], IEEE 802.11be [144], IEEE 802.11ad [197], and IEEE 802.11ay [279]. Moreover, ultra-high-rate THz transmission is supported by the IEEE 802.15.3d standard utilizing both sub-THz and THz frequencies [101, 173, 195].

- Sub-6 GHz Frequencies:** The goal of LAA is to deploy the legacy 4G long-term-evolution-advanced (LTE-A) system in the 5 GHz band. However, since the pathloss is increased at higher frequencies, the coverage area is reduced compared to that at 2.4 GHz. Additionally, both the IEEE 802.11ac/ax/be standard systems and weather radar systems are operated at 5 GHz, where the uplink/downlink interference control and retransmission mechanism constitute the key research issues of LAA. Therefore, LAA employs carrier aggregation (CA) in order to guarantee the target QoS of UEs. The IEEE 802.11ax system combines orthogonal frequency division multiple access (OFDMA) with sophisticated scheduling mechanisms to achieve simultaneous multiuser data transmission over separate bands [202]. We also note that 802.11be is an enhanced version of 802.11ax, which further improves the spectral efficiency by adopting wider unlicensed bands and enhanced transmission techniques [144].

- mmWave Frequencies:** IEEE 802.11ad/ay operates in the 60 GHz mmWave band and relies on beamforming to compensate for the high pathloss with the aid of the so-called enhanced directional multi-gigabit (EDMG) technique [196]. However, the hidden node problem associated with the usage of 802.11ad/ay critically relying on beamforming remains a challenging unsolved issue [279]. Furthermore, multiple access points (APs) have to be established for practical multiuser mmWave based EDMG transmissions relying on the 802.11ad/ay protocols. However, beamforming training is another potential challenge, which has to be tackled for finding the optimal beam direction in such complex multiuser multi-AP scenarios. Therefore, an enhanced multi-AP multiuser architecture is proposed in [200], which is backward compatible with the existing 802.11ad/ay protocol. To elaborate briefly, the coordination based beamforming training (CBFT) of [200] was designed for multiple APs and multiple users with the objective of attaining near-unity successful user association ratio and a maximum tolerable beam alignment outage probability. The APs aim for flexibly tuning both the length of training frames and of the contention slots, whereas the users perform their individual association and individual beam training [200]. As shown in [200] quantifying both the system's latency and throughput, the CBFT imposes the lowest latency and yet achieves the highest throughput, substantially outperforming both the time division method and the conventional 802.11ad/ay protocols.
- THz Frequencies:** The THz-band holds the promise of an abundance of bandwidths capable of fulfilling the high data rate demands of 6G. As an enhancement of the mmWave IEEE 802.11ad/ay standard, IEEE 802.15.3d is the first protocol ratified for THz transmissions [101]. It supports different applications, such as wireless backhaul/fronthaul, data centers, kiosk downloading, and even intra-chip networks [173]. The ultra-wide band proposed by the World Radio Conference 2019 (WRC-2019) spans from 2.16 GHz up to 69.12 GHz bandwidth utilization between the operating frequencies of 252.72 GHz and 321.84 GHz. However, the THz properties impose several implementation-oriented hurdles both in terms of the high-power signal-generation and signal-detection, which require carefully-crafted new THz beamforming techniques. Furthermore, due to the hostile propagation properties, 802.15.3d adopts robust low-complexity modulation schemes, such as the THz single carrier mode (*THz-SC PHY*) and THz on-off keying mode (*THz-OOK PHY*), both proposed in [101, 173]. From a protocol design perspective, the network coordinator will train its THz-beams with the aid of consecutive beacons transmitted to the devices, whereas the devices will transmit directional association requests for exchanging all desired information. Given the higher beam resolution of 802.15.3d THz compared to 802.11ad/ay, it requires new low-complexity and low-overhead THz-oriented beamforming training. Furthermore, the prospective techniques of 802.15.3d conceived for the THz band include (1) simplified procedures for initial access and device discovery, (2) multiple access and interference mitigation, (3) node mobility and multiple-channel access support, and (4) up to 100 Gbps-level mid-range wireless fronthaul/backhaul capabilities using nano-antenna-arrays. To elaborate a little further, as elaborated in Fig. 4, the beam network leveraging both mmWave wide-beams and THz-oriented pencil-beams becomes a promising solution in multi-spectrum accessing in a collaborative transmission manner. However, it remains an open issue regarding how to design low-complexity and low-overhead coordinative beam training and transmission mechanism under limited computing and communication resources for cross-spectrum and hybrid-radio access networks.

2.4 Multiple Wireless Services

The 5G network supports three rather different types of wireless services, including enhanced mobile broadband (eMBB), ultra-reliable and low latency communications (URLLC), as well as massive machine type communications (mMTC) [177], as depicted in Fig. 5. The next-generation eMBB network services require new transmission and access technologies for achieving even higher data rates in new wireless network architectures, representing the genesis of the enhanced ultra-mobile broadband (eUMBB) philosophy. In a similar spirit, the emerging

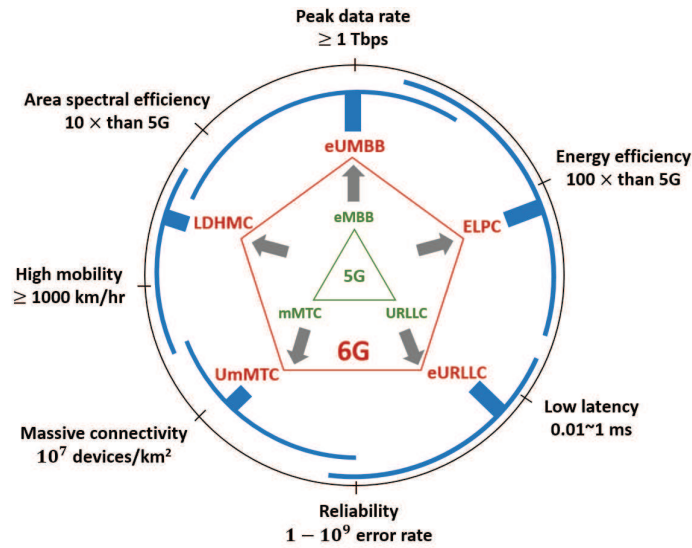


Fig. 5. Multiple network services for 5G and 6G eras.

next-generation enhanced-URLLC (eURLLC) mode has beneficial applications in unmanned factories, unmanned aircraft, unmanned vehicles and intelligent transportation systems requiring instant messaging at a high reliability and low latency. Additionally, given the escalation of the number of connections, there is an increasing need for an ultra-mMTC (UmMTC) design for supporting more flexible, efficient, low-latency, highly-adaptive protocols. In the next-generation hybrid services, such as the URLLC-eMBB services [64], front-end resource allocation and hybrid numerology optimization have emerged as open issues.

As defined in the 3rd Generation Partnership Project (3GPP) specifications, the network's functional split [118] is capable of supporting the flexible configuration of the entire core network and its devices for performing either centralized or distributed computing. In addition to the above-mentioned services, the research community is also discussing the conception of both long-distance and high-mobility communications (LDHMC) as well as of extremely low-power communications (ELPC) [276], as also illustrated in Fig. 5. Moreover, as a prospect potential specification by 3GPP [100, 246], they release the tentative timeline and key technologies from 5G and its advanced as well as 6G-era, as summarized in Fig. 6. Terrestrial use cases is proposed at early stage from Release 14 to 16, whereas versatile conceptions of architectures and spectrum utilization are leveraged in advanced version of 5G from Release 17 to 20. While, from Release 21, powerful AI techniques and new transmission/spectrum for community usage are tentatively conceived as 6G services in heterogeneous radios. As a result, it becomes imperative to integrate the networks both horizontally and vertically in support of high transmission rates, full coverage of remote areas, high-mobility, and lower-power IoT devices.

3 FACET 2: NEXT-GENERATION NETWORKING

3.1 Network Softwarization of SDN/NFV

To fulfill the challenging specifications of next-generation networks, SDN research focuses both on automatic network management and on the optimization of traffic management, which includes dynamic real-time automated network management, routing optimization, load-balancing, multi-path routing, quality management of service routes, and automatic repair of faltering routes [23, 263, 270]. Network function virtualization (NFV) partitions

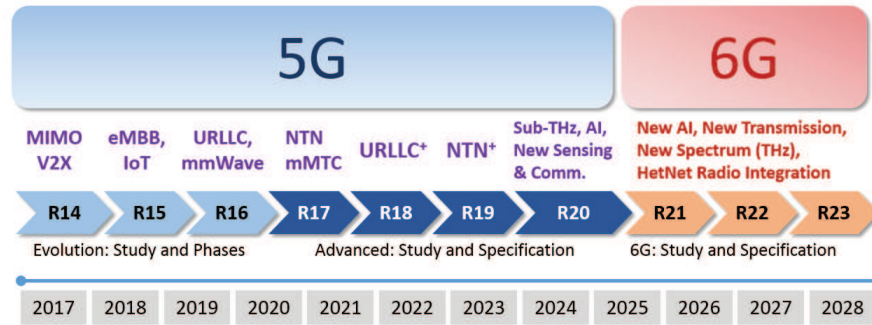


Fig. 6. Tentative timeline and key technologies from 5G, advanced and 6G in 3GPP organization.

the real network into multiple independent virtual networks, which have their individual operating resources in support of heterogeneous service qualities. The security challenges are attacks against the controller and blocking of network services [161]. In a nutshell, NFV becomes an important research topic, which increases the flexibility of network deployment and reduces both the device costs and operating costs. We can further improve the system performance by combining the SDN principles with optimized management of the tele-traffic routes. Hence, NFV combined with management and orchestration (NFV-MANO) constitute pivotal research issues to be explored in the field of network softwarization [5].

3.2 Next-Generation Packet Core Networks

The conventional mobile core network is constituted by specific hardware and software, including a mobility management entity (MME), as well as serving gateways (SGWs) and home subscriber server (HSS) units [10]. Although the traditional core network relies on separate control and data link layers, the processing of packets between these two layers should still be performed in the switch and router simultaneously. With the rapid development of SDN and NFV, the mobile core network constitutes the natural platform for accommodating the control and data link layers, which leads to the potential research topic of the so-called virtualized evolved packet core (vEPC) [183]. The 3GPP organization also proposed the 5G core (5GC) networking concept, including both standalone (SA) and non-standalone (NSA) options for flexibly adjusting the configuration of the control and user planes [50, 108]. Integrating SDN and NFV techniques is capable of supporting flexible applications for telecom operators. It also contributes to the conception of the network slicing architecture [108], where a realistic network is partitioned into multiple QoS-guaranteed virtual networks. However, improving the flexibility and functionality of packet processing across different switches becomes one of the salient research issues in the SDN/NFV-enabled 6G core network (6GC) of the near future.

3.3 Next-Generation Mobile Network Architecture and Management

Thanks to the introduction of SDN and NFV, the architecture and management of next-generation mobile networks exhibits a high grade of flexibility, intelligence and automation, including advanced mobile cloud and edge computing. It is a crucial task to adaptively assign computing resources to the cloud and edge. Both mobile edge computing (MEC) [111, 164] and fog computing [165] constitute important next-generation network architectures, which potentially lead to the reduction of service latency as well as to the improvement of both the spectral efficiency and QoS. Given the increased number of BSs forming heterogeneous networks, conventional manual control of the power allocation and BS deployment becomes infeasible. The advanced self-organized

Table 4. Comparison of NB-IoT, LoRa and SigFox

Feature	NB-IoT	LoRa	SigFox
Alliance	3GPP (2016)	LoRa Alliance (2015)	SigFox (2009)
Spectrum	Licensed	Unlicensed	Unlicensed
Frequency	In-Band LTE, LTE Guard band, 700–900 MHz	433, 780, 868, 915 MHz	868, 902 MHz
Bandwidth	180–200 kHz	125–500 kHz	100 Hz
Modulation	UL: SC-FDMA DL: OFDMA	Chirp spread spectrum (CSS)	UWB
Transmission	Half-duplex	Half-duplex	Half-duplex
Data Rate	UL: 130 kbps DL: 160 kbps	0.25–50 kbps	100 bps
Output Power	UL: 14–22 dBm DL: 27–30 dBm	14–30 dBm	14, 20–23 dBm
Max Range	15 km	Urban: 3–5 km Rural: 15 km	Urban: 10 km Rural: 50 km
Connectivity	10^5 devs.	2.5×10^5 devs.	10^6 devs.
Battery Life	5–10 years	5–10 years	5–10 years
Cost	High	Low	Medium
Interference	Low	High	High
Security	High	Low	Low

network (SON) [285] concept subsumes SDN and NFV in support of self-configuration, self-optimization, self-healing and self-sustenance. The SON can also automatically execute the optimization of the key parameter settings [9].

4 FACET 3: INTERNET OF THINGS

4.1 IoT Access, Sensing and Data Collection

The IoT is a network formed by the interactions of physical objects or by the related hardware and software, gleaned information from diverse networks constituted by heterogeneous sensor devices and controllers [155]. The different IoT networks require diverse types of sensors and transmission modes, as exemplified by the Internet-of-everything, the network of personal wearables [105], industrial IoT (IIoT) [157, 208], intelligent home services and even the underwater Internet [103]. It is critical to design a mechanism for efficiently sensing the environments for collecting data and for uploading information to the processing server. However, there are substantial challenges, such as the coordination of different protocols for improving the system’s power consumption, capacity and spectral efficiency [74].

The versatile features of IoT transmission are capable of facilitating diverse configurations in support of either large-scale access, or long transmission distances, low-power and/or low-rate operation at low deployment cost [74]. In addition to machine-to-machine (M2M) type communications, the family of advanced IoT-based protocols include Zigbee, ZWave, Bluetooth Low Energy (BLE), Bluetooth 5.0, SigFox, IEEE 802.11p for vehicular communications, the Long Range (LoRa) protocol [204], 3GPP Narrow Band IoT (NB-IoT), and WiFi HaLow for IEEE 802.11ah, which are so-called low-power wide area network (LPWAN) solutions [15, 184]. The comparison of popular IoT technologies including NB-IoT, LoRa and SigFox is summarized in Table 4. To elaborate a little further, NB-IoT [274] is the standardized protocol relying on 5G BSs for providing convenient IoT access based on the existing infrastructure. Furthermore, wireless wide area networks based on LoRa [184] and IEEE 802.11ah are capable of offering private or public network deployment for industrial applications.

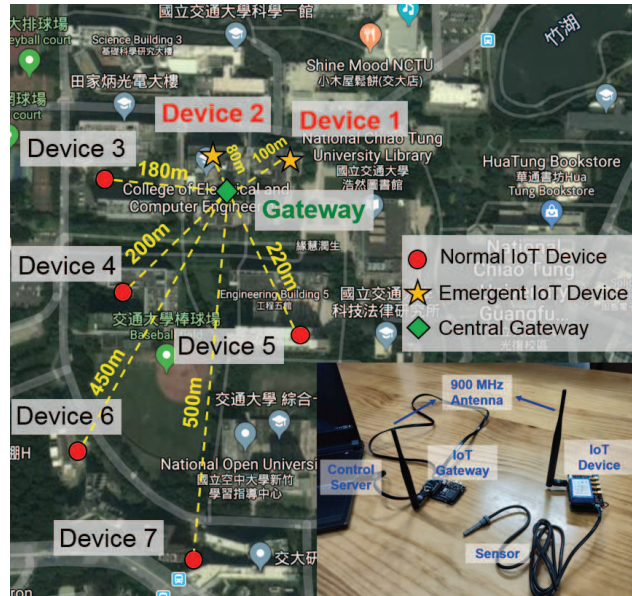


Fig. 7. Experimental environment of an LoRa-based IoT network [204].

However, these revolutionary techniques should consider the potentially conflicting requirements of high area spectral efficiency, low interference, infrequent handovers, and power conservation [20]. A range of further challenging problems are associated with data encryption [104], traffic management and resource allocation in low-power IoT networks [204]. The above-mentioned IoT technologies mainly rely on using narrow band communications. Therefore, we should design advanced schemes for striking a tradeoff among the requirements of narrow bandwidth, low power consumption, tight synchronization, and limited processing complexity. The authors of [204] have established an LoRa-based IoT network for the complex scenario seen in Fig. 7 by proposing a joint traffic-aware channel and contention backoff window size allocation (TCBA) scheme capable of handling diverse IoT traffic loads characterized by their packet arrival rates. The IoT covers multiple research areas, which requires the consideration of the overall network architecture and various heterogeneous technologies, while tackling the technical challenges of efficiency, reliability, and integration in the sensing layer, the network transport layer, the operations and management layer, as well as the application layer [159, 206].

4.2 Vehicular Networks

As a special use case of IoT, there is an ever-increasing demand for high-performance Internet of Vehicles services [230], which stimulates substantial research. One of the most important challenges is that of connected autonomous vehicles (CAVs) relying on joint sensing, control, as well as communications [63]. The associated IoT devices and sensors are carried by the vehicles with objective of detecting and tracking objects, such as pedestrians, other vehicles, and traffic signs. Moreover, it is vitally important to keep track of the status of road traffic. Furthermore, vehicle-to-everything (V2X) [78] supports the wireless exchange of information between vehicles and other connected devices. For example, V2X communication is capable of supporting the IoT sensors by providing long-range detection of hazards, traffic conditions, and blind spots outside the vehicular field of view (FoV). By relying on IoT services, V2X technology improves road safety, traffic efficiency, and energy efficiency through the employment of road side units. More specific service types include vehicle-to-infrastructure

(V2I), vehicle-to-vehicle (V2V), vehicle-to-network (V2N), vehicle-to-pedestrian (V2P) and vehicle-to-device (V2D) solutions relaying either on cellular-based or wireless local area network (WLAN)-based systems. The cellular V2X (C-V2X) and NR-V2X harness existing cellular NR-based networks and V2X protocols [78, 188]. Furthermore, as specified by the IEEE 802.11p standard, dedicated short-range communications (DSRC), which is the first V2X communication service relies on WLAN technology and supports directly both V2V and V2I services by forming vehicular ad-hoc network [1]. The open challenges in IoT-V2X include their wireless channel characteristics, resource management, their heterogeneous interfaces, their dynamic topology, efficient routing and trajectory design, congestion policy, security and reliability, as well as joint optimization of sensing, control and communications [72, 152, 166, 194, 232].

4.3 Social IoT Network

Social IoT (S-IoT) networks are virtual social networks formed by a group of IoT devices belonging to people having similar interests [180]. The S-IoT integrates IoT networks, which rely on proximity services (ProxSe) [92]. Note that under a ProxSe scenario members of mobile community networks must be geographically adjacent and are capable of directly accessing D2D or vehicular communications. The S-IoT can also be regarded as a human social network supporting efficient services or facilitating the interaction of sensor devices. The S-IoT is also capable of reusing social networking modules for IoT networks, including pedestrian/vehicular mobile social networks [284]. The potential future applications will include advertising, geographic data or content sharing, social networking platforms, robotic systems, gaming platforms, the relaying of data from the users or IoT devices, including the enhanced driving safety, roadside information access, unmanned aerial vehicles, autonomous driving, and environmentally-friendly vehicles.

In this context, *network science* aims for analyzing the resultant complex networks in terms of their topology, dynamic characteristics, behaviors, functions and diverse attributes by relying on graph theory [26], social network theory [7], statistical physics [172], biology [167], and social science [113]. Some of the open research issues in 6G include but are not limited to: (1) the network's topology, connectivity, resilience and robustness; (2) information dissemination assisted by the epidemic network model and network inference [168]; (3) the conception of advanced analytic tools relying on graph theory [58] and game theory [268].

4.4 Security and Privacy

In recent years, numerous network attacks have taken place threatening user security and privacy [112, 222]. Hence, rapid advances took place in privacy enhancement as well as in physical layer security (PLS) [88]. However, the existing security and privacy protection techniques only consider a single functionality and service, which has to be extended to multiple services [209]. Furthermore, next-generation quantum cryptography and post-quantum cryptography have numerous challenging open problems [38].

The privacy issues of IoT applications in wearable device networks, smart grids, and vehicular networks are in their infancy. For example, under wireless body area networks (WBANs) relying on the IEEE 802.15.6 standard [190], wearable device protocols have to be redesigned for ensuring the security and privacy of wearable devices. The privacy-aware strategies of smart grids associated with electricity prediction and billing also require substantial future research [169]. Moreover, the security-critical issues of vehicular networks also require further advances, with special attention on emergency messages, authentication, and ultra-low latency communications between road side units (RSUs) and vehicles in the face of high mobility. Additionally, the security and privacy of intelligent cloud and edge networks also constitute important research topics [248].

5 FACET 4: WIRELESS POSITIONING AND SENSING

5.1 Outdoor Positioning

The most widely used outdoor positioning [29] system at the time of writing is the global positioning system (GPS), which has a limited position accuracy and limited coverage owing to its high signal loss. Its shortcomings might be mitigated by beneficially harnessing the signals gleaned from cellular BSs [228], for example, for the location tracking of vehicles and UAVs [119, 145]. However, the excessive Doppler shift of high-speed movement constitutes a critical challenge in the physical layer of high-accuracy tracking [39]. By relying on sophisticated AI techniques [233], we can design compelling outdoor applications around regional points of interests [133]. The associated space-time based positioning information can be beneficially exploited for precisely tracking specific user trajectories. Furthermore, a whole suite of challenging but promising services may be conceived upon integrating long-distance and/or low-power IoT networks into the existing cellular vehicle tracking, for example.

5.2 Indoor Positioning

Since the existing GPS system has almost no indoor coverage, the indoor positioning systems typically rely on WiFi signal strength measurements and pre-recorded radio frequency (RF) maps termed as fingerprinting [33, 83]. However, the precision of fingerprint-based indoor positioning techniques critically hinges on the stability of wireless signals and on the establishment of large databases, which is extremely laborious [255, 262]. This task may nonetheless be mitigated with the aid of spatial skeleton databases inferred from indoor map information [42]. As a design alternative, lower-power Bluetooth [256] and ultra-wide band (UWB) scenarios may also be adopted by the indoor positioning systems. In order to improve the attainable positioning accuracy, we can deploy various micro sensors such as RF identification (RFID), infrared, ultrasonic, visible light [286] as well as other smart devices, including accelerometers, gyroscopes, magnetometers, air pressure, ambient sound and laser sensors.

Moreover, when aiming for centimeter-level positioning accuracy, the channel state information (CSI) has also been widely adopted to collect positioning data [45, 57, 145, 237] in order to glean a more complete signal profile of frequency, power, and latency than simply harnessing the received signal strength [83]. Recent studies have also been conducted in the mmWave [135, 224] and THz bands, while relying on beamforming techniques [59] to collect higher-dimensional signal sources for wireless positioning and sensing. In a nutshell, the positioning receiver of the above-mentioned so-called device-based regimes is required to collect measurement data concerning known reference points when performing fingerprint-based indoor localization.

However, the evolutionary trend is to design device-free indoor positioning [45, 97, 138, 145] algorithms operating without the aid of wearable devices. The corresponding overall architecture is illustrated in Fig. 8, which is established by relying on multiple APs associated with AI-assisted edge and central servers. Whilst Fig. 8 might seem complex, it provides an easy-reading anecdotal portrayal of the whole gamut of ideas under discussion by the scientific community. As the 6G standardization evolves further towards a broad global consensus, this figure may be reconstructed according to the harmonious confluence of ideas elaborated as follows. As shown in Fig. 8. The databases can be gleaned from the front-end AP by measuring and scrutinising the specific fluctuation of the received signals, which characterize the particular nature of indoor activities, including motion, positioning, presence and vitality detection. These issues will be further detailed in the following subsection in the context of Fig. 9. The edge server carries out the local training of the network's model parameters related to its corresponding behavior, and the resultant trained local models will be merged into a global model by the central server. This device-free positioning philosophy is especially suitable for application scenarios where no wearable devices are available, including continuous tracking and ushering [281], which allows us to simply monitor the wireless signals without revealing any user identities [117]. Furthermore, in hostile indoor scenarios of oil tankers, mining

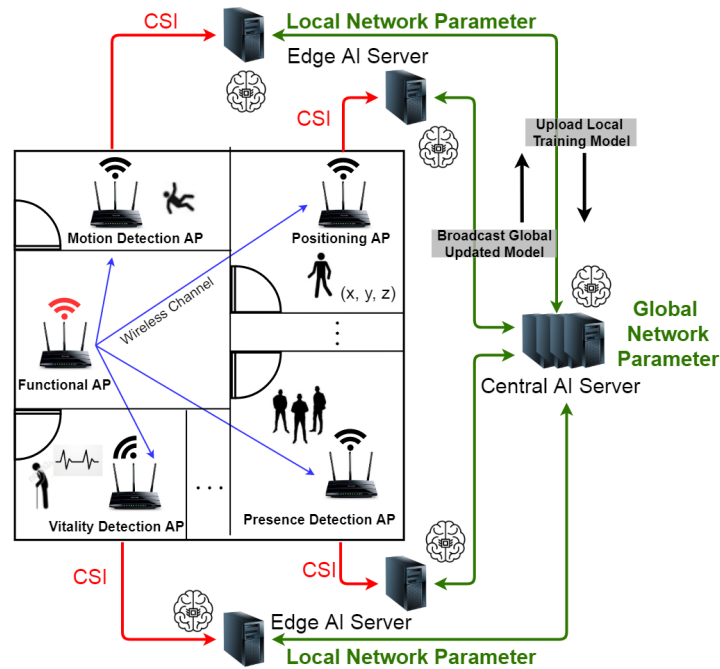


Fig. 8. Device-free wireless positioning and sensing detection with the deployed functional APs, edge and central AI servers. The CSI dataset is collected via wireless channels between AP pairs. Local network parameters are learned by edge AI servers, whereas global model updating and broadcasting are performed by a central AI server.

pits or complex plants [19], it becomes extremely challenging to glean accurate positioning information. Therefore, the key research issues of indoor positioning include object tracking, trajectory modelling and the associated parameter optimization of device-free positioning.

5.3 Wireless Indoor Detection

Given the rapid development of device-free indoor positioning [45, 97, 138, 145], the application scenarios of smart homes, green buildings, factory manufacturing and healthcare will all substantially benefit. Moreover, these fine-grained detection techniques will also find innovative applications in pedestrian path tracking, presence detection, motion detection, and vitality detection [32].

- *Pedestrian Tracking* aims for tracking a human's walking trajectory within a specific area [243]. We can distinguish their potential behaviors through historical data. However, due to the complexity of overlapped signals in the time and frequency domains, it is quite challenging to carry out multi-object tracking, which remains an open research issue.
- *Presence Detection* infers the existence of people in indoor environments based on the variation of received signals [115, 280], but the challenge is that not only human presence, but a range of other events may result in time-varying signals. False detection may take place even owing to humidity and temperature changes in the air, and due to the unpredictable locations of interfering objects, which requires time-consuming replenishment of the database. To elaborate a little further, presence detection across different rooms [45, 145] imposes substantial challenges on the associated signal analysis, where the associated attenuation

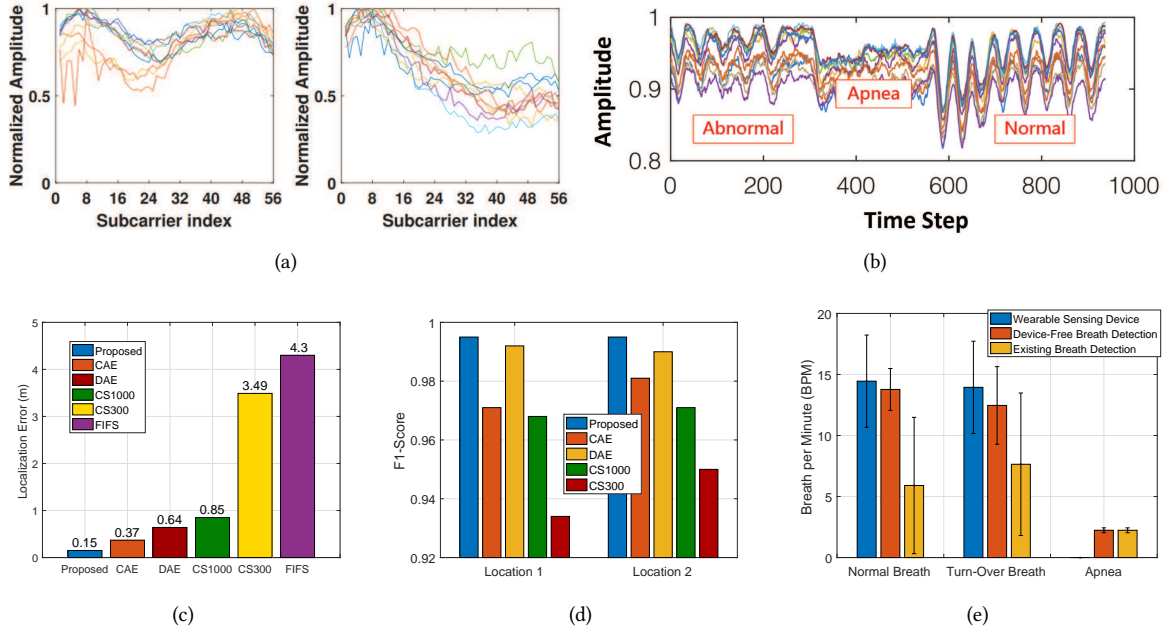


Fig. 9. Experimental results of (a) CSI for presence observations and (b) CSI for abnormal/normal/apnea breathing scenarios and the corresponding performances of (c) localization [223], (d) presence detection [97] and (e) breath rate detection in terms of localization errors, F1-score and rate of breath per minute (BPM), respectively.

as well as multipath effects, which should be jointly taken into consideration. As the detection coverage area is expanded, it becomes imperative to strike a balance among deployment costs, implementation complexity and detection accuracy.

- *Motion Detection* aims for detecting human behavior and movements such as standing, hand-waving, falling, slow walking, jumping and so on [43, 77, 114]. Different movements potentially lead to distinct signal changes in the wireless paths. Hence, advanced algorithms may be conceived for detecting different human behaviors with reasonable accuracy. However, the network topology should be carefully designed to avoid interferences from other objects, which may severely deteriorate the accuracy of motion detection.
- *Vitality Detection* analyzes wireless signals for detecting slight human feature changes, e.g., breathing rate [252, 266] and heart rate changes. With the aid of breath/heart rate estimation and prediction, a carer of the elderly may be notified if abnormal heartbeat, arrhythmia, apnea as well as severe snoring occurs. Due to more subtle changes in the human body compared to the surroundings, existing advances are confined to a small area or very short distances in order to provide adequate detection accuracy.

Most existing techniques utilize wearable devices for maintaining detection accuracy; however, wearing devices may lead to potential inconvenience and frequent battery recharging [257]. It becomes imperative to enhance the signal processing techniques in the physical layer for improving the attainable device-free detection precision at a reduced computational complexity. Regarding the techniques illustrated in Fig. 8, the authors of [97, 223] have established an AI-empowered device-free WiFi-based CSI learning platform for both positioning as well as for presence and vitality detection. The associated experimental results are depicted in Fig. 9. It can be readily observed in Fig. 9(a) that the CSI difference indicates the presence and absence of humans. By contrast, Fig. 9(b)

shows three breathing scenarios, including abnormal, apnea, and normal states. In comparison to the existing positioning methods found in the open literature and characterized in Fig. 9(c), the device-free machine learning based CSI positioning scheme proposed in [223] achieves the lowest localization error of 0.15 meter. Moreover, the CSI-based presence detection framework proposed in [97] and characterized in Fig. 9(d) has the highest detection accuracy in terms of the F1 metric defined in [97]. In Fig. 9(e), it is observed for vitality detection that the device-free breath detection may approach the performance of wearable sensing devices.

Table 5. AI for 6G Communication and Networking Technologies

AI Schemes	Machine Learning	Deep Learning	Potential Applications and Solutions
Supervised Learning	<ul style="list-style-type: none"> ✓ SVM ✓ Bayesian ✓ KNN ✓ LDA ✓ Decision Tree 	<ul style="list-style-type: none"> ✓ DNN ✓ CNN ✓ RNN ✓ LSTM ✓ GNN 	<ul style="list-style-type: none"> – Optimum UM-MIMO beamforming for mmWave/THz (DNN, CNN) – Channel and traffic classification and prediction (SVM, LDA, Bayesian) – Device-free positioning and detection sensing (KNN, RNN, LSTM) – Automatic management of integrated 6G RAT (GNN, Decision Tree) – Mobility-based handover mechanism (SVM, LDA LSTM) – Big data processing for IoT (DNN, CNN, RNN, LSTM) – 6G multi-network and multi-service optimization (DNN, GNN)
Unsupervised Learning	<ul style="list-style-type: none"> ✓ K-means ✓ PCA ✓ SVD ✓ HMM ✓ EM 	<ul style="list-style-type: none"> ✓ Autoencoder ✓ GAN 	<ul style="list-style-type: none"> – 6G network data augmentation (GAN) – Wireless channel detection and generation (SVD, Autoencoder, GAN) – Grant-free transmissions (HMM, EM) – Server data dimension reduction (PCA) – High-precision trajectory tracking (K-means, HMM) – 6G Network function and BS deployment (K-means) – Security and privacy enhancement (Autoencoder, GAN) – Unlicensed spectrum sensing (HMM, EM)
Reinforcement Learning	<ul style="list-style-type: none"> ✓ Q Learning ✓ Monte Carlo 	<ul style="list-style-type: none"> ✓ DQN ✓ DDPG ✓ IRL 	<ul style="list-style-type: none"> – Cloud/edge computing resource management (Q learning, DQN, DDPG) – Enhanced 6G RRM for diverse tele-traffic demands (DQN, DDPG, Monte Carlo) – Network numerology adaptation (Q learning, DQN, DDPG) – New user contention and accessing schemes (Q learning) – QoS-guaranteed virtual networks (DQN, DDPG) – Transmission and traffic scheduling (Q learning, DQN, DDPG, Monte Carlo) – Network power control based on wireless experts' experience (IRL, DDPG)
Distributed Learning	-	-	<ul style="list-style-type: none"> – Parallel computing in 6G core – Multi-task oriented communications and networking
Federated Learning	-	-	<ul style="list-style-type: none"> – Security-/privacy-aware strategies for multiusers and multi-services – Coordination and cooperation among different 6G networks
Transfer Learning	-	-	<ul style="list-style-type: none"> – Rapid model establishment for SDN/NFV based SON – Positioning and detection in different coverage areas

SVM: support vector machine, KNN: k nearest neighbor, LDA: linear discriminant analysis, DNN: deep neural network, CNN: convolutional neural network, RNN: recurrent neural network, LSTM: long short-term memory, GNN: graph neural network, PCA: principal components analysis, SVD: singular value decomposition, HMM: hidden Markov model, EM: expectation-maximization, GAN: generative adversarial network, DQN: deep Q network, DDPG: deep deterministic policy gradient, IRL: inverse reinforcement learning

6 FACET 5: APPLICATIONS OF DEEP LEARNING IN 6G NETWORKS

Given the rapid development of AI-empowered deep learning, both *supervised learning* as well as *unsupervised learning* and *reinforcement learning* have found favour in solving challenging communications and networking problems [52, 231], as shown in Fig. 10. Specific examples are constituted by radio interference management, resource allocation, multiple parameter optimization [215], network traffic prediction, computing resource assignment, and flexible configuration of network functions [35]. In supervised learning, ground truth labels and

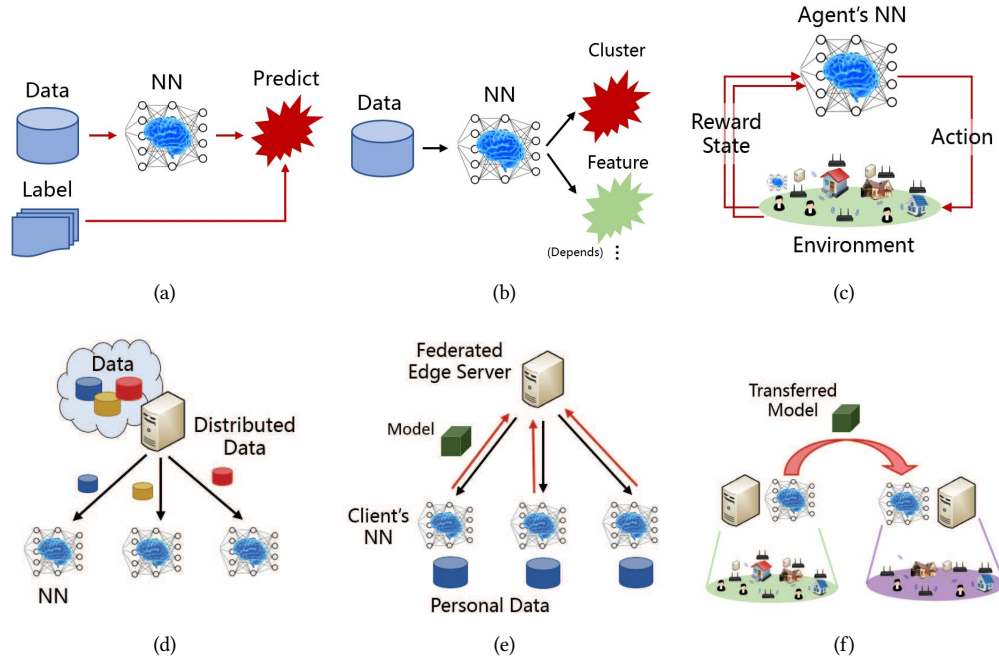


Fig. 10. Deep learning mechanisms of (a) supervised, (b) unsupervised, and (c) reinforcement learning. The architecture of network learning of (d) distributed, (e) federated and (f) transfer learning.

fixed-size inputs constitute a deep layered neural network (NN). However, labeling is not required in unsupervised learning, which exploits the correlation between samples of the dataset. In reinforcement learning, an agent will interact with the environment and then updates the model based on the corresponding rewards. Note that deep learning can deal with comparably complex problems in a non-linear and non-convex manner than that utilizing machine learning. Therefore, we can efficiently manage both vertical and horizontal networks with the aid of deep neural networks. The AI schemes adopting deep learning for potential 6G applications and solutions are summarized at a glance in Table 5.

- **Supervised learning:** The open challenges in this technique include data collection and the appropriate data analytics in a practical network scenarios. Take wireless transmission for example, the collected beamforming data from real measurement or from solutions of convex optimization is served as ground-truth labels in an NN-based training. Moreover, laborious indoor fingerprinting for collecting signal features should be conducted for positioning and detection sensing. Several machine and deep learning techniques are designed to address different types of issues, such as 1) spatial correlation over data classification and prediction is well tackled by SVM, KNN, DNN and CNN, etc [71, 97, 196, 223]. 2) Temporal-domain problem is addressed by RNN and LSTM [125, 207, 240]. 3) Large-scale networking policy and management is perfectly performed by GNN [37, 87, 253].
- **Unsupervised learning:** The research target of this learning mechanism is focused on inference from an unlabelled dataset. Unlike supervised method with ground truth, unsupervised learning leverages iterative inference to attain hidden features for either dataset partitioning, clustering or augmentation. For example, GAN is promisingly adopted in network data augmentation [22, 130, 221] and security [191, 245, 278]

for compensating information insufficiency from practical measurement. The highly-complex and high-dimensional large-scale network data processing can be well dealt with by using PCA method. While, accessing under uncertain and stochastic environment can rely on HMM or EM algorithms for maximizing total utility [140]. The grand challenge lies on the accuracy and confidence of learning results, which becomes an open issue.

- **Reinforcement learning:** Such technique is broadly employed for dynamic network policy adaptation in wireless network communication and computing resource management, network multi-parameters for diverse tele-traffic demands, QoS-guaranteed scheduling as well as accessing [69, 127, 146, 249]. Q learning uses a model-free mechanism by adjusting its policy according to updated system state and performance. However, its performance is limited by convergence speed and great uncertainties in a large-scale network. As an enhancement, DQN can tackle above-mentioned problems by using different model-based NNs for respective actions and evaluations based on interaction with the environment. However, the common challenge of reinforcement learning techniques lies on theoretical proofs of convergence, optimality and dynamic adaptation.

As a promising extension of DQN, *deep deterministic policy gradient* (DDPG) based learning relies on a pair of neural networks forming an action-critic network: The action network provides the optimal policy, whilst the critic network evaluates the action. DDPG potentially enhances the stability, flexibility and adaptability to dynamic wireless communication systems [34, 94]. Furthermore, *multi-agent reinforcement learning* [160] is widely adopted in conjunction with multiple agents controlling their own policies, which mitigates the computational burden and memory requirements at the server. Note that multi-agent solutions may be viewed as multiple BSs and edges [28], a swarm of drones [258] or vehicles [220]. They interact with the common shared environment and determine their next action without any information exchange overhead. To elaborate a little further, *inverse reinforcement learning* (IRL), also referred to as learning from demonstrations [116], may also find applications in wireless communications and networking [272]. In contrast to conventional forward reinforcement learning, IRL is capable of learning from an expert and may exhibit some human-like behaviors [14], which is popularly applied in robotic control systems.

Furthermore, the complexity of wireless propagation environments and the challenging requirements of high tele-traffic can be readily dealt with by sophisticated transfer learning methods [153, 264]. Briefly, *transfer learning* directly employs the models that were previously trained under a network to a new environment for improving the efficiency of retraining [265]. Given the rapid evolution of virtualized software-defined networks, it appears promising to adopt AI techniques for efficiently assigning resources both to central units as well as to edge servers and flexibly manage the resultant mobile network [238]. In the past, fully-centralized computing was the norm, which often led to overloaded situations. As a remedy, *distributed learning* allows the server to distribute its tasks to different computing units for parallel processing [235]. For example, the 6G core network is expected to employ intelligent units for separately managing its control and user planes as well as the dynamic configuration of network functions [239].

Some other new machine learning and deep learning techniques found in the AI-domain and applied for control and computer vision may also be harnessed for solving wireless communications and networking problems. As another attractive technique, *meta learning* relies on sparse samples and labels for solving heterogeneous tasks [70]. It can promptly adapt the trained parameters based on just a few experiences in a new environment at an impressive convergence rate and low computational complexity, which has already been employed in cellular [287], IoT [261] and vehicular networks [260]. AI techniques are also capable of efficiently processing massive amounts of IoT data [122], whilst the family of unlicensed access technologies may adopt AI-based learning models for detecting existing networks in order to avoid interference and packet collisions, while improving the spectrum versus energy efficiency [30]. Moreover, deep neural networks are also capable of maintaining

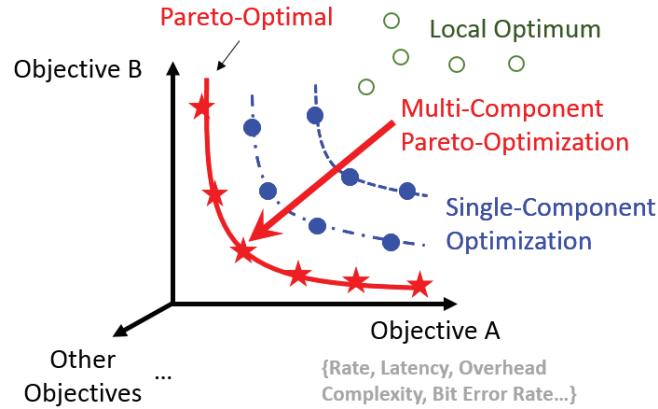


Fig. 11. Illustration of a multi-component Pareto-optimization considering two objectives, such as rate, latency, overhead, complexity, and bit error rate metrics.

the QoS, while supporting numerous IoT devices [154]. They can also preserve energy and adaptively collect environmental data [219]. Additionally, we can also support network deployment as well as prediction and performance evaluation of a massive number of sensor nodes by employing graph convolutional networks [269]. For ensuring network information security, *federated learning* can be employed [126, 163], where the encrypted models of local networks are uploaded and updated by a global controller, which prevents tapping and inference from the models by eavesdroppers. In the face of uncertainty, it is promising to conceive deep learning designs for ascertaining the authenticity of subscribers and for detecting unusual network behaviors, combat attacks from external networks, and ensure data privacy, especially, when relying on both limited computing resources and information [218, 247].

7 SUMMARY AND THE ROAD TO MULTI-COMPONENT PARETO-OPTIMIZATION

This article has listed five key research topics of next-generation wireless, including *Next-Generation Architecture, Spectrum and Services, Next-Generation Networking, Internet of Things, Wireless Positioning and Sensing*, as well as the *Applications of Deep Learning in 6G Networks*. We have investigated comprehensive literature surveys for the potential promising techniques from the perspectives of architectures, networking, applications as well as scheme designs, which are extended from the current foundation of wireless and networking. We return to Fig. 1 and note that there is a potentially infinite number of system configurations that may be harnessed by next-generation systems. Throughout the past five generations there has been a gradual paradigm shift from bandwidth-efficiency relying on complex, high-delay near-capacity transceivers [84] towards maximizing the power-efficiency [40], which has the fond connotation of green radio [82]. With the introduction of 5G new radio and its URLLC mode, the importance of simultaneously maintaining both low latency and low bit error rate has reached the lime-light. This trend heralds a new multi-component optimization era [67], in which the research community is expected to find all the so-called Pareto-optimal operating points of the associated multi-component objective functions, as highlighted for example in [8, 49, 136, 231].

In this context the question arises: How can we boldly differentiate Pareto optimization from the set of simple conventional trade-offs? Explicitly, when we carry out for example single-component bandwidth-efficiency optimization, we completely ignore any other parameters or metrics of the system, such as its complexity or delay. In this context, we can for example always approach the Shannonian capacity more closely, if we employ a longer

coding, which typically imposes an increased delay and escalating computing complexity. By contrast, in addition to this unconstrained Shannonian solution the Pareto front of all optimal configurations will contain the specific delay and complexity associated with each individual legitimate channel coded length. Hence, from physical layer perspective, this Pareto-optimal approach also goes way beyond the concept of finite-block-length information theory [175], which simply quantifies the achievable performance associated with a specific coding-length, i.e., delay, but it remains oblivious of the complexity of a block-code capable of achieving it.

To elaborate a little further in the context of a tangible example, let us assume that the multi-component objective function relying on bit error rate, throughput, delay as well as power has to be optimized. It is plausible that the throughput may be readily increased upon increasing the number of bits/symbol even without degrading the bit error rate, if we increase the power, i.e., degrade the power-efficiency and vice versa. Indeed, the throughput may also be improved without degrading the power-efficiency to the detriment of the bit error rate owing to increasing the number of bits/symbol. In this tangible practical context, the Pareto-front contains all optimal solutions. However, by definition none of the above parameters may be improved without degrading at least one of the others. Some other numerous tangible practical solutions may be found in [8, 40, 49, 67, 82, 84, 136, 231].

By relying on an asymptotic concept of *multi-task learning* [275], we are capable of incorporating powerful machine learning and deep learning techniques into multi-component optimization [216]. Depending on the specific requirements, multiple weighted loss functions can be designed for maximizing the detection accuracy and rate, while minimizing the processing time and energy in conjunction with four respective weights. AI-based multi-component optimization is capable of decomposing complex objective function spaces, striking a compelling tradeoff between processing efficiency and computational complexity [216]. As for applications in wireless communications and networking, federated learning and reinforcement learning based schemes are widely employed for multi-component learning optimization of diverse requirements, such as rate, throughput, latency, energy-spectrum efficiency and reliability [21, 85, 129, 282, 283]. Furthermore, transfer learning may be capable of resolving the dynamic multi-objective optimization problems routinely found in parameter initialization by the exploiting neural network's memory for faster convergence [107]. To conclude, a subset of open research issues in next-generation wireless are listed for providing insights gleaned from different fields, as the community moves from single-component to multi-component optimization. This radical system optimization principle may be expected to pervade the next-generation era, but requires a concerted community effort to make it a reality!

REFERENCES

- [1] Khadige Abboud, Hassan Aboubakr Omar, and Weihua Zhuang. 2016. Interworking of DSRC and Cellular Network Technologies for V2X Communications: A Survey. *IEEE Transactions on Vehicular Technology* 65, 12 (2016), 9457–9470.
- [2] Ameha Tsegaye Abebe and Chung G. Kang. 2019. Grant-Free Uplink Transmission With Multi-Codebook-Based Sparse Code Multiple Access (MC-SCMA). *IEEE Access* 7 (2019), 169853–169864.
- [3] Taufik Abr  o, Lucas Dias Hiera Sampaio, Shaoshi Yang, Kent Tsz Kan Cheung, Paul Jean Etienne Jeszensky, and Lajos Hanzo. 2016. Energy Efficient OFDMA Networks Maintaining Statistical QoS Guarantees for Delay-Sensitive Traffic. *IEEE Access* 4 (2016), 774–791.
- [4] M. S. Afaqui, E. Garcia-Villegas, and E. Lopez-Aguilera. 2017. IEEE 802.11ax: Challenges and Requirements for Future High Efficiency WiFi. *IEEE Wireless Communications* 24, 3 (2017), 130–137.
- [5] I. Afolabi, T. Taleb, K. Samdanis, A. Ksentini, and H. Flinck. 2018. Network Slicing and Softwarization: A Survey on Principles, Enabling Technologies, and Solutions. *IEEE Communications Surveys Tutorials* 20, 3 (2018), 2429–2453.
- [6] Akash Agarwal, Aditya K. Jagannatham, and Lajos Hanzo. 2020. Finite Blocklength Non-Orthogonal Cooperative Communication Relying on SWIPT-Enabled Energy Harvesting Relays. *IEEE Transactions on Communications* 68, 6 (2020), 3326–3341.
- [7] Yutong Ai, Li Wang, Zhu Han, Ping Zhang, and Lajos Hanzo. 2018. Social Networking and Caching Aided Collaborative Computing for the Internet of Things. *IEEE Communications Magazine* 56, 12 (2018), 149–155.
- [8] Dimitrios Alanis, Panagiotis Botsinis, Zunaira Babar, Hung Viet Nguyen, Daryus Chandra, Soon Xin Ng, and Lajos Hanzo. 2018. Quantum-Aided Multi-Objective Routing Optimization Using Back-Tracing-Aided Dynamic Programming. *IEEE Transactions on Vehicular Technology* 67, 8 (2018), 7856–7860.
- [9] Dimitrios Alanis, Panagiotis Botsinis, Soon Xin Ng, and Lajos Hanzo. 2014. Quantum-Assisted Routing Optimization for Self-Organizing Networks. *IEEE Access* 2 (2014), 614–632.

- [10] I. Alawe, A. Ksentini, Y. Hadjadj-Aoul, and P. Bertin. 2018. Improving Traffic Forecasting for 5G Core Network Scalability: A Machine Learning Approach. *IEEE Network* 32, 6 (2018), 42–49.
- [11] Md Shipon Ali, Ekram Hossain, Arafat Al-Dweik, and Dong In Kim. 2018. Downlink Power Allocation for CoMP-NOMA in Multi-Cell Networks. *IEEE Transactions on Communications* 66, 9 (2018), 3982–3998.
- [12] Muntadher Alsabah, Marwah Abdulrazzaq Naser, Basheera M. Mahmmod, Sadiq H. Abdulhussain, Mohammad R. Eissa, Ahmed Al-Baidhani, Nor K. Noordin, Sadiq M. Sait, Khaled A. Al-Utaibi, and Fazirul Hashim. 2021. 6G Wireless Communications Networks: A Comprehensive Survey. *IEEE Access* 9 (2021), 148191–148243.
- [13] Hussein A. Ammar, Raviraj Adve, Shahram Shahbazpanahi, Gary Boudreau, and Kothapalli Venkata Srinivas. 2022. User-Centric Cell-Free Massive MIMO Networks: A Survey of Opportunities, Challenges and Solutions. *IEEE Communications Surveys & Tutorials* 24, 1 (2022), 611–652.
- [14] Saurabh Arora and Prashant Doshi. 2018. A Survey of Inverse Reinforcement Learning: Challenges, Methods and Progress. *arXiv* (2018), 1–48. <https://doi.org/10.48550/ARXIV.1806.06877>
- [15] Wael Ayoub, Abed Ellatif Samhat, Fabienne Nouvel, Mohamad Mroue, and Jean-Christophe PrAvotet. 2019. Internet of Mobile Things: Overview of LoRaWAN, DASH7, and NB-IoT in LPWANs Standards and Supported Mobility. *IEEE Communications Surveys Tutorials* 21, 2 (2019), 1561–1581.
- [16] Ertugrul Basar, Marco Di Renzo, Julien De Rosny, Merouane Debbah, Mohamed-Slim Alouini, and Rui Zhang. 2019. Wireless Communications Through Reconfigurable Intelligent Surfaces. *IEEE Access* 7 (2019), 116753–116773.
- [17] Hamed Bastami, Mehdi Letafati, Majid Moradikia, Ahmed Abdelhadi, Hamid Behroozi, and Lajos Hanzo. 2021. On the Physical Layer Security of the Cooperative Rate-Splitting-Aided Downlink in UAV Networks. *IEEE Transactions on Information Forensics and Security* 16 (2021), 5018–5033.
- [18] Hamed Bastami, Majid Moradikia, Ahmed Abdelhadi, Hamid Behroozi, Bruno Clerckx, and Lajos Hanzo. 2022. Maximizing the Secrecy Energy Efficiency of the Cooperative Rate-Splitting Aided Downlink in Multi-Carrier UAV Networks. *IEEE Transactions on Vehicular Technology* (2022), 1–17.
- [19] J. M. Batalla, C. X. Mavroumoustakis, G. Mastorakis, N. N. Xiong, and J. Wozniak. 2020. Adaptive Positioning Systems Based on Multiple Wireless Interfaces for Industrial IoT in Harsh Manufacturing Environments. *IEEE Journal on Selected Areas in Communications* 38, 5 (2020), 899–914.
- [20] Christian Berger, Philipp Eichhammer, Hans P. Reiser, Jorg Domaschka, Franz J. Hauck, and Gerhard Habiger. 2021. A Survey on Resilience in the IoT: Taxonomy, Classification, and Discussion of Resilience Mechanisms. *ACM Comput. Surv.* 54, 7 (2021).
- [21] Yu Bi, Carlos Colman Meixner, Monchai Bunyakitanon, Xenofon Vasilakos, Reza Nejabati, and Dimitra Simeonidou. 2021. Multi-Objective Deep Reinforcement Learning Assisted Service Function Chains Placement. *IEEE Transactions on Network and Service Management* 18, 4 (2021), 4134–4150.
- [22] Kangcheng Bin, Shihao Luo, Xiaopu Zhang, Jun Lin, and Xunqian Tong. 2021. Compressive Data Gathering With Generative Adversarial Networks for Wireless Geophone Networks. *IEEE Geoscience and Remote Sensing Letters* 18, 3 (2021), 558–562.
- [23] Azzedine Boukerche and Amir Darehshoorzadeh. 2014. Opportunistic Routing in Wireless Networks: Models, Algorithms, and Classifications. *ACM Comput. Surv.* 47, 2 (2014).
- [24] Alexandros-Apostolos A. Boulogeorgos and Angeliki Alexiou. 2021. Coverage Analysis of Reconfigurable Intelligent Surface Assisted THz Wireless Systems. *IEEE Open Journal of Vehicular Technology* 2 (2021), 94–110.
- [25] Angela Sara Cacciapuoti, Marcello Caleffi, Rodney Van Meter, and Lajos Hanzo. 2020. When Entanglement Meets Classical Communications: Quantum Teleportation for the Quantum Internet. *IEEE Transactions on Communications* 68, 6 (2020), 3808–3833.
- [26] HongYun Cai, Vincent W. Zheng, and Kevin Chen-Chuan Chang. 2018. A Comprehensive Survey of Graph Embedding: Problems, Techniques, and Applications. *IEEE Transactions on Knowledge and Data Engineering* 30, 9 (2018), 1616–1637.
- [27] Xuelin Cao, Bo Yang, Chongwen Huang, Chau Yuen, Marco Di Renzo, Zhu Han, Dusit Niyato, H. Vincent Poor, and Lajos Hanzo. 2021. AI-Assisted MAC for Reconfigurable Intelligent-Surface-Aided Wireless Networks: Challenges and Opportunities. *IEEE Communications Magazine* 59, 6 (2021), 21–27.
- [28] Zilong Cao, Pan Zhou, Ruixuan Li, Siqi Huang, and Dapeng Wu. 2020. Multiagent Deep Reinforcement Learning for Joint Multichannel Access and Task Offloading of Mobile-Edge Computing in Industry 4.0. *IEEE Internet of Things Journal* 7, 7 (2020), 6201–6213.
- [29] N. Capurso, T. Song, W. Cheng, J. Yu, and X. Cheng. 2017. An Android-Based Mechanism for Energy Efficient Localization Depending on Indoor/Outdoor Context. *IEEE Internet of Things Journal* 4, 2 (2017), 299–307.
- [30] U. Challita, L. Dong, and W. Saad. 2018. Proactive Resource Management for LTE in Unlicensed Spectrum: A Deep Learning Perspective. *IEEE Transactions on Wireless Communications* 17, 7 (2018), 4674–4689.
- [31] B. Chen, J. Chen, Y. Gao, and J. Zhang. 2017. Coexistence of LTE-LAA and Wi-Fi on 5 GHz With Corresponding Deployment Scenarios: A Survey. *IEEE Communications Surveys Tutorials* 19, 1 (2017), 7–32.
- [32] C. Chen et al. 2018. TR-BREATH: Time-Reversal Breathing Rate Estimation and Detection. *IEEE Transactions on Biomedical Engineering* 65, 3 (2018), 489–501.

- [33] C. Chen and K. Feng. 2017. Statistical Distance Estimation Algorithms With RSS Measurements for Indoor LTE-A Networks. *IEEE Transactions on Vehicular Technology* 66, 2 (2017), 1709–1722.
- [34] Juan Chen and Zongling Wu. 2021. Dynamic Computation Offloading With Energy Harvesting Devices: A Graph-Based Deep Reinforcement Learning Approach. *IEEE Communications Letters* 25, 9 (2021), 2968–2972.
- [35] Mingzhe Chen, Ursula Challita, Walid Saad, Changchuan Yin, and MÃrouane Debbah. 2019. Artificial Neural Networks-Based Machine Learning for Wireless Networks: A Tutorial. *IEEE Communications Surveys Tutorials* 21, 4 (2019), 3039–3071.
- [36] S. Chen, T. Zhao, H. Chen, Z. Lu, and W. Meng. 2017. Performance Analysis of Downlink Coordinated Multipoint Joint Transmission in Ultra-Dense Networks. *IEEE Network* 31, 5 (2017), 106–114.
- [37] Tianrui Chen, Xinrui Zhang, Minglei You, Gan Zheng, and Sangarapillai Lambotharan. 2022. A GNN-Based Supervised Learning Framework for Resource Allocation in Wireless IoT Networks. *IEEE Internet of Things Journal* 9, 3 (2022), 1712–1724.
- [38] C. Cheng, R. Lu, A. Petzoldt, and T. Takagi. 2017. Securing the Internet of Things in a Quantum World. *IEEE Communications Magazine* 55, 2 (2017), 116–120.
- [39] R. Cheng, Y. Song, D. Chen, and X. Ma. 2019. Intelligent Positioning Approach for High Speed Trains Based on Ant Colony Optimization and Machine Learning Algorithms. *IEEE Transactions on Intelligent Transportation Systems* 20, 10 (2019), 3737–3746.
- [40] Kent Tsz Kan Cheung, Shaoshi Yang, and Lajos Hanzo. 2013. Achieving Maximum Energy-Efficiency in Multi-Relay OFDMA Cellular Networks: A Fractional Programming Approach. *IEEE Transactions on Communications* 61, 7 (2013), 2746–2757.
- [41] Kent Tsz Kan Cheung, Shaoshi Yang, and Lajos Hanzo. 2014. Spectral and Energy Spectral Efficiency Optimization of Joint Transmit and Receive Beamforming Based Multi-Relay MIMO-OFDMA Cellular Networks. *IEEE Transactions on Wireless Communications* 13, 11 (2014), 6147–6165.
- [42] Chun-Jie Chiu, Kai-Ten Feng, and Po-Hsuan Tseng. 2017. Spatial Skeleton-Enhanced Location Tracking for Indoor Localization. In *Proc. IEEE Wireless Communications and Networking Conference (WCNC)*. 1–6.
- [43] Chun-Jie Chiu, Yu-Chieh Tien, Kai-Ten Feng, and Po-Hsuan Tseng. 2021. Intelligent Visual Acuity Estimation System With Hand Motion Recognition. *IEEE Transactions on Cybernetics* 51, 12 (2021), 6226–6239.
- [44] M. Z. Chowdhury, M. T. Hossain, A. Islam, and Y. M. Jang. 2018. A Comparative Survey of Optical Wireless Technologies: Architectures and Applications. *IEEE Access* 6 (2018), 9819–9840.
- [45] Fang-Yu Chu, Chun-Jie Chiu, An-Hung Hsiao, Kai-Ten Feng, and Po-Hsuan Tseng. 2021. WiFi CSI-Based Device-free Multi-room Presence Detection using Conditional Recurrent Network. In *2021 IEEE 93rd Vehicular Technology Conference (VTC2021-Spring)*. 1–5.
- [46] Bruno Clerckx, Hamdi Joudeh, Chenxi Hao, Mingbo Dai, and Borzoo Rassouli. 2016. Rate splitting for MIMO wireless networks: a promising PHY-layer strategy for LTE evolution. *IEEE Communications Magazine* 54, 5 (2016), 98–105.
- [47] Bruno Clerckx, Yijie Mao, Robert Schober, Eduard A. Jorswieck, David J. Love, Jinhong Yuan, Lajos Hanzo, Geoffrey Ye Li, Erik G. Larsson, and Giuseppe Caire. 2021. Is NOMA Efficient in Multi-Antenna Networks? A Critical Look at Next Generation Multiple Access Techniques. *IEEE Open Journal of the Communications Society* 2 (2021), 1310–1343.
- [48] Jingjing Cui, Soon Xin Ng, Dong Liu, Jiankang Zhang, Arumugam Nallanathan, and Lajos Hanzo. 2021. Multiobjective Optimization for Integrated Ground-Air-Space Networks: Current Research and Future Challenges. *IEEE Vehicular Technology Magazine* 16, 3 (2021), 88–98.
- [49] Jingjing Cui, Halil Yetgin, Dong Liu, Jiankang Zhang, Soon Xin Ng, and Lajos Hanzo. 2021. Twin-Component Near-Pareto Routing Optimization for AANETs in the North-Atlantic Region Relying on Real Flight Statistics. *IEEE Open Journal of Vehicular Technology* 2 (2021), 346–364.
- [50] W. d. S. Coelho, A. Benhamiche, N. Perrot, and S. Secci. 2020. Network Function Mapping: From 3G Entities to 5G Service-Based Functions Decomposition. *IEEE Communications Standards Magazine* 4, 3 (2020), 46–52.
- [51] Hong-Ning Dai, Raymond Chi-Wing Wong, Hao Wang, Zibin Zheng, and Athanasios V. Vasilakos. 2019. Big Data Analytics for Large-Scale Wireless Networks: Challenges and Opportunities. *ACM Comput. Surv.* 52, 5 (2019).
- [52] L. Dai, R. Jiao, F. Adachi, H. V. Poor, and L. Hanzo. 2020. Deep Learning for Wireless Communications: An Emerging Interdisciplinary Paradigm. *IEEE Wireless Communications* 27, 4 (2020), 133–139.
- [53] Linglong Dai, Bichai Wang, Zhiguo Ding, Zhaocheng Wang, Sheng Chen, and Lajos Hanzo. 2018. A Survey of Non-Orthogonal Multiple Access for 5G. *IEEE Communications Surveys Tutorials* 20, 3 (2018), 2294–2323.
- [54] Linglong Dai, Bichai Wang, Mugen Peng, and Shanzhi Chen. 2019. Hybrid Precoding-Based Millimeter-Wave Massive MIMO-NOMA With Simultaneous Wireless Information and Power Transfer. *IEEE Journal on Selected Areas in Communications* 37, 1 (2019), 131–141.
- [55] Linglong Dai, Bichai Wang, Min Wang, Xue Yang, Jingbo Tan, Shuangkaisheng Bi, Shenheng Xu, Fan Yang, Zhi Chen, Marco Di Renzo, Chan-Byoung Chae, and Lajos Hanzo. 2020. Reconfigurable Intelligent Surface-Based Wireless Communications: Antenna Design, Prototyping, and Experimental Results. *IEEE Access* 8 (2020), 45913–45923.
- [56] Linglong Dai, Bichai Wang, Yifei Yuan, Shuangfeng Han, I. Chih-lin, and Zhaocheng Wang. 2015. Non-orthogonal multiple access for 5G: solutions, challenges, opportunities, and future research trends. *IEEE Communications Magazine* 53, 9 (2015), 74–81.
- [57] P. Davidson and R. PichÃl. 2017. A Survey of Selected Indoor Positioning Methods for Smartphones. *IEEE Communications Surveys Tutorials* 19, 2 (2017), 1347–1370.

- [58] F. D  rfler, J. W. Simpson-Porco, and F. Bullo. 2018. Electrical Networks and Algebraic Graph Theory: Models, Properties, and Applications. *Proc. IEEE* 106, 5 (2018), 977–1005.
- [59] M. El-Absi, A. Alhaj Abbas, A. Abuelhaija, F. Zheng, K. Solbach, and T. Kaiser. 2018. High-Accuracy Indoor Localization Based on Chipless RFID Systems at THz Band. *IEEE Access* 6 (2018), 54355–54368.
- [60] Hadeel Elayan, Osama Amin, Raed M. Shubair, and Mohamed-Slim Alouini. 2018. Terahertz communication: The opportunities of wireless technology beyond 5G. In *Proc. IEEE International Conference on Advanced Communication Technologies and Networking (CommNet)*. 1–5.
- [61] Mohamed Elhattab, Mohamed-Amine Arfaoui, Chadi Assi, and Ali Ghayeb. 2021. Reconfigurable Intelligent Surface Assisted Coordinated Multipoint in Downlink NOMA Networks. *IEEE Communications Letters* 25, 2 (2021), 632–636.
- [62] Mohamed Elhattab, Mohamed Amine Arfaoui, Chadi Assi, and Ali Ghayeb. 2022. Reconfigurable Intelligent Surface Enabled Full-Duplex/Half-Duplex Cooperative Non-Orthogonal Multiple Access. *IEEE Transactions on Wireless Communications* 21, 5 (2022), 3349–3364.
- [63] Azim Eskandarian, Chaoxian Wu, and Chuanyang Sun. 2021. Research Advances and Challenges of Autonomous and Connected Ground Vehicles. *IEEE Transactions on Intelligent Transportation Systems* 22, 2 (2021), 683–711.
- [64] A. A. Esswie and K. I. Pedersen. 2018. Opportunistic Spatial Preemptive Scheduling for URLLC and eMBB Coexistence in Multi-User 5G Networks. *IEEE Access* 6 (2018), 38451–38463.
- [65] Alice Faisal, Ibrahim Al-Nahhal, Octavia A. Dobre, and Telex M. N. Ngatched. 2021. Deep Reinforcement Learning for Optimizing RIS-Assisted HD-FD Wireless Systems. *IEEE Communications Letters* 25, 12 (2021), 3893–3897.
- [66] C. H. Fang, P. R. Li, and K. T. Feng. 2019. Joint Interference Cancellation and Resource Allocation for Full-Duplex Cloud Radio Access Networks. *IEEE Transactions on Wireless Communications* 18, 6 (2019), 3019–3033.
- [67] Zesong Fei, Bin Li, Shaoshi Yang, Chengwen Xing, Hongbin Chen, and Lajos Hanzo. 2017. A Survey of Multi-Objective Optimization in Wireless Sensor Networks: Metrics, Algorithms, and Open Problems. *IEEE Communications Surveys Tutorials* 19, 1 (2017), 550–586.
- [68] Kai-Ten Feng, Li-Hsiang Shen, Chi-Yu Li, Po-Tsang Huang, Sau-Hsuan Wu, Li-Chun Wang, Yi-Bing Lin, and Mau-Chung Frank Chang. 2020. 3D On-Demand Flying Mobile Communication for Millimeter-Wave Heterogeneous Networks. *IEEE Network* 34, 5 (2020), 198–204.
- [69] Amal Feriani and Ekram Hossain. 2021. Single and Multi-Agent Deep Reinforcement Learning for AI-Enabled Wireless Networks: A Tutorial. *IEEE Communications Surveys Tutorials* 23, 2 (2021), 1226–1252.
- [70] Chelsea Finn, Pieter Abbeel, and Sergey Levine. 2017. Model-Agnostic Meta-Learning for Fast Adaptation of Deep Networks. In *Proc. of International Conference on Machine Learning*. 1126–1135.
- [71] Mahdi Foz, Ahmad R. Sharafat, and Mehdi Bennis. 2022. Fast MIMO Beamforming via Deep Reinforcement Learning for High Mobility mmWave Connectivity. *IEEE Journal on Selected Areas in Communications* 40, 1 (2022), 127–142.
- [72] Karthikeyan Ganesan, Joachim Lohr, Prateek Basu Mallick, Andreas Kunz, and Ravi Kuchibhotla. 2020. NR Sidelink Design Overview for Advanced V2X Service. *IEEE Internet of Things Magazine* 3, 1 (2020), 26–30.
- [73] Zhixiang Gao, Aijun Liu, and Xiaohu Liang. 2020. The Performance Analysis of Downlink NOMA in LEO Satellite Communication System. *IEEE Access* 8 (2020), 93723–93732.
- [74] V. Gazis. 2017. A Survey of Standards for Machine-to-Machine and the Internet of Things. *IEEE Communications Surveys Tutorials* 19, 1 (2017), 482–511.
- [75] Marco Giordani, Michele Polese, Marco Mezzavilla, Sundeep Rangan, and Michele Zorzi. 2020. Toward 6G Networks: Use Cases and Technologies. *IEEE Communications Magazine* 58, 3 (2020), 55–61.
- [76] David Greenwood and Lajos Hanzo. 1999. *Characterisation of Mobile Radio Channels: 2nd*. John Wiley & Sons. 91–185 pages.
- [77] Y. Gu, J. Zhan, Y. Ji, J. Li, F. Ren, and S. Gao. 2017. MoSense: An RF-Based Motion Detection System via Off-the-Shelf WiFi Devices. *IEEE Internet of Things Journal* 4, 6 (2017), 2326–2341.
- [78] Sohan Gyawali, Shengjie Xu, Yi Qian, and Rose Qingyang Hu. 2021. Challenges and Solutions for Cellular Based V2X Communications. *IEEE Communications Surveys & Tutorials* 23, 1 (2021), 222–255.
- [79] Vu Nguyen Ha, Ti Ti Nguyen, Long Bao Le, and Jean-Fran  ois Frigon. 2020. Admission Control and Network Slicing for Multi-Numerology 5G Wireless Networks. *IEEE Networking Letters* 2, 1 (2020), 5–9.
- [80] R. Hadani, S. Rakib, A. F. Molisch, C. Ibars, A. Monk, M. Tsatsanis, J. Delfeld, A. Goldsmith, and R. Calderbank. 2017. Orthogonal Time Frequency Space (OTFS) modulation for millimeter-wave communications systems. In *Proc. IEEE International Microwave Symposium (IMS)*. 681–683.
- [81] R. Hadani, S. Rakib, M. Tsatsanis, A. Monk, A. J. Goldsmith, A. F. Molisch, and R. Calderbank. 2017. Orthogonal Time Frequency Space Modulation. In *Proc. IEEE Wireless Communications and Networking Conference (WCNC)*. 1–6.
- [82] Congzheng Han, Tim Harrold, Simon Armour, Ioannis Krikidis, Stefan Videv, Peter M. Grant, Harald Haas, John S. Thompson, Ivan Ku, Cheng-Xiang Wang, Tuan Anh Le, M. Reza Nakhai, Jiayi Zhang, and Lajos Hanzo. 2011. Green radio: radio techniques to enable energy-efficient wireless networks. *IEEE Communications Magazine* 49, 6 (2011), 46–54.

- [83] Shuai Han, Yi Li, Weixiao Meng, Cheng Li, Tianqi Liu, and Yanbo Zhang. 2019. Indoor Localization With a Single Wi-Fi Access Point Based on OFDM-MIMO. *IEEE Systems Journal* 13, 1 (2019), 964–972.
- [84] Lajos Hanzo, Mohammed El-Hajjar, and Osamah Alamri. 2011. Near-Capacity Wireless Transceivers and Cooperative Communications in the MIMO Era: Evolution of Standards, Waveform Design, and Future Perspectives. *Proc. IEEE* 99, 8 (2011), 1343–1385.
- [85] Meng Hao, Weizhe Zhang, Yiming Wang, Gangzhao Lu, Farui Wang, and Athanasios V. Vasilakos. 2021. Fine-Grained Powercap Allocation for Power-Constrained Systems Based on Multi-Objective Machine Learning. *IEEE Transactions on Parallel and Distributed Systems* 32, 7 (2021), 1789–1801.
- [86] Muxin He, Wei Xu, Hong Shen, Guo Xie, Chunming Zhao, and Marco Di Renzo. 2021. Cooperative Multi-RIS Communications for Wideband mmWave MISO-OFDM Systems. *IEEE Wireless Communications Letters* 10, 11 (2021), 2360–2364.
- [87] Shiwen He, Shaowen Xiong, Yeyu Ou, Jian Zhang, Jiaheng Wang, Yongming Huang, and Yaoxue Zhang. 2021. An Overview on the Application of Graph Neural Networks in Wireless Networks. *IEEE Open Journal of the Communications Society* 2 (2021), 2547–2565.
- [88] Tiep M. Hoang, Dong Liu, Thien Van Luong, Jiankang Zhang, and Lajos Hanzo. 2022. Deep Learning Aided Physical-Layer Security: The Security Versus Reliability Trade-Off. *IEEE Transactions on Cognitive Communications and Networking* 8, 2 (2022), 442–453.
- [89] Nadasadat Hosseini-dehaj, Zunaira Babar, Robert Malaney, Soon Xin Ng, and Lajos Hanzo. 2019. Satellite-Based Continuous-Variable Quantum Communications: State-of-the-Art and a Predictive Outlook. *IEEE Communications Surveys Tutorials* 21, 1 (2019), 881–919.
- [90] Tianwei Hou, Yuanwei Liu, Zhengyu Song, Xin Sun, Yue Chen, and Lajos Hanzo. 2020. Reconfigurable Intelligent Surface Aided NOMA Networks. *IEEE Journal on Selected Areas in Communications* 38, 11 (2020), 2575–2588.
- [91] Tianwei Hou, Jun Wang, Yuanwei Liu, Xin Sun, Anna Li, and Bo Ai. 2022. A Joint Design for STAR-RIS Enhanced NOMA-CoMP Networks: A Simultaneous-Signal-Enhancement-and-Cancellation-Based (SSECB) Design. *IEEE Transactions on Vehicular Technology* 71, 1 (2022), 1043–1048.
- [92] C. Huang, C. Shao, S. Xu, and H. Zhou. 2017. The Social Internet of Thing (S-IOT)-Based Mobile Group Handoff Architecture and Schemes for Proximity Service. *IEEE Transactions on Emerging Topics in Computing* 5, 3 (2017), 425–437.
- [93] Chongwen Huang, Zhaohui Yang, George C. Alexandropoulos, Kai Xiong, Li Wei, Chau Yuen, Zhaoyang Zhang, and MÃIrouane Debbah. 2021. Multi-Hop RIS-Empowered Terahertz Communications: A DRL-Based Hybrid Beamforming Design. *IEEE Journal on Selected Areas in Communications* 39, 6 (2021), 1663–1677.
- [94] Chongwen Huang, Zhaohui Yang, George C. Alexandropoulos, Kai Xiong, Li Wei, Chau Yuen, Zhaoyang Zhang, and MÃIrouane Debbah. 2021. Multi-Hop RIS-Empowered Terahertz Communications: A DRL-Based Hybrid Beamforming Design. *IEEE Journal on Selected Areas in Communications* 39, 6 (2021), 1663–1677.
- [95] C. Huang, A. Zappone, G. C. Alexandropoulos, M. Debbah, and C. Yuen. 2019. Reconfigurable Intelligent Surfaces for Energy Efficiency in Wireless Communication. *IEEE Transactions on Wireless Communications* 18, 8 (2019), 4157–4170.
- [96] X. Huang, J. A. Zhang, R. P. Liu, Y. J. Guo, and L. Hanzo. 2019. Airplane-Aided Integrated Networking for 6G Wireless: Will It Work? *IEEE Vehicular Technology Magazine* 14, 3 (2019), 84–91.
- [97] Yu-Ming Huang, An-Hung Hsiao, Chun-Jie Chiu, Kai-Ten Feng, and Po-Hsuan Tseng. 2019. Device-Free Multiple Presence Detection Using CSI with Machine Learning Methods. In *Proc. IEEE Vehicular Technology Conference (VTC-Fall)*. 1–5.
- [98] Yung-Ting Huang, Chun-Hao Fang, Li-Hsiang Shen, and Kai-Ten Feng. 2020. Optimal Functional Split for Processing Sharing based CoMP for Mixed eMBB and uRLLC Traffic. In *Proc. IEEE Global Communications Conference (GLOBECOM)*. 1–6.
- [99] Kazi Mohammed Saidul Huq, Sherif Adeshina Busari, Jonathan Rodriguez, Valerio Frascolla, Wael Bazzi, and Douglas C. Sicker. 2019. Terahertz-Enabled Wireless System for Beyond-5G Ultra-Fast Networks: A Brief Survey. *IEEE Network* 33, 4 (2019), 89–95.
- [100] O. Liberg C. Hoymann H. Wiemann C. Tidestav P. Schliwa-Bertling P. Persson I. Rahman, S. M. Razavi and D. Gerstenberger. 2021. 5G evolution toward 5G advanced: An overview of 3GPP releases 17 and 18. *Ericsson Technology Review* (2021).
- [101] IEEE. 2017. IEEE Standard for High Data Rate Wireless Multi-Media Networks—Amendment 2: 100 Gb/s Wireless Switched Point-to-Point Physical Layer. *IEEE Std 802.15.3d-2017 (Amendment to IEEE Std 802.15.3-2016 as amended by IEEE Std 802.15.3e-2017)* (2017), 1–55.
- [102] Nachikethas A. Jagadeesan and Bhaskar Krishnamachari. 2014. Software-Defined Networking Paradigms in Wireless Networks: A Survey. *ACM Comput. Surv.* 47, 2 (2014).
- [103] Mohammad Jahanbakht, Wei Xiang, Lajos Hanzo, and Mostafa Rahimi Azghadi. 2021. Internet of Underwater Things and Big Marine Data Analytics—A Comprehensive Survey. *IEEE Communications Surveys Tutorials* 23, 2 (2021), 904–956.
- [104] A. Jalaly Bidgoly and H. Jalaly Bidgoly. 2019. A Novel Chaining Encryption Algorithm for LPWAN IoT Network. *IEEE Sensors Journal* 19, 16 (2019), 7027–7034.
- [105] Y. Jang, Y. Kim, S. Park, and S. Choi. 2019. Link adaptation strategies for IEEE 802.15.4 WPANs: Protocol design and performance evaluation. *Journal of Communications and Networks* 21, 4 (2019), 376–384.
- [106] Ziyi Jia, Min Sheng, Jiandong Li, Dusit Niyato, and Zhu Han. 2021. LEO-Satellite-Assisted UAV: Joint Trajectory and Data Collection for Internet of Remote Things in 6G Aerial Access Networks. *IEEE Internet of Things Journal* 8, 12 (2021), 9814–9826.
- [107] Min Jiang, Zhongqiang Huang, Liming Qiu, Wenzhen Huang, and Gary G. Yen. 2018. Transfer Learning-Based Dynamic Multiobjective Optimization Algorithms. *IEEE Transactions on Evolutionary Computation* 22, 4 (2018), 501–514.

- [108] A. Kaloxylos. 2018. A Survey and an Analysis of Network Slicing in 5G Networks. *IEEE Communications Standards Magazine* 2, 1 (2018), 60–65.
- [109] Mayur Katwe, Keshav Singh, Prabhat Kumar Sharma, Chih-Peng Li, and Zhiguo Ding. 2022. Dynamic User Clustering and Optimal Power Allocation in UAV-Assisted Full-Duplex Hybrid NOMA System. *IEEE Transactions on Wireless Communications* 21, 4 (2022), 2573–2590.
- [110] Waqas Khalid, Heejung Yu, Dinh-Thuan Do, Zeeshan Kaleem, and Song Noh. 2021. RIS-Aided Physical Layer Security With Full-Duplex Jamming in Underlay D2D Networks. *IEEE Access* 9 (2021), 99667–99679.
- [111] Latif U. Khan, Ibrar Yaqoob, Nguyen H. Tran, S. M. Ahsan Kazmi, Tri Nguyen Dang, and Choong Seon Hong. 2020. Edge-Computing-Enabled Smart Cities: A Comprehensive Survey. *IEEE Internet of Things Journal* 7, 10 (2020), 10200–10232.
- [112] Rabia Khan, Pardeep Kumar, Dushantha Nalin K. Jayakody, and Madhusanka Liyanage. 2020. A Survey on Security and Privacy of 5G Technologies: Potential Solutions, Recent Advancements, and Future Directions. *IEEE Communications Surveys & Tutorials* 22, 1 (2020), 196–248.
- [113] Tuja Khaund, Baris Kirdemir, Nitin Agarwal, Huan Liu, and Fred Morstatter. 2021. Social Bots and Their Coordination During Online Campaigns: A Survey. *IEEE Transactions on Computational Social Systems* (2021), 1–16.
- [114] S. Kianoush, S. Savazzi, F. Vicentini, V. Rampa, and M. Giussani. 2017. Device-Free RF Human Body Fall Detection and Localization in Industrial Workplaces. *IEEE Internet of Things Journal* 4, 2 (2017), 351–362.
- [115] J. E. Kim, J. H. Choi, and K. T. Kim. 2020. Robust Detection of Presence of Individuals in an Indoor Environment Using IR-UWB Radar. *IEEE Access* 8 (2020), 108133–108147.
- [116] B Ravi Kiran, Ibrahim Sobh, Victor Talpaert, Patrick Mannion, Ahmad A. Al Sallab, Senthil Yogamani, and Patrick Perez. 2022. Deep Reinforcement Learning for Autonomous Driving: A Survey. *IEEE Transactions on Intelligent Transportation Systems* 23, 6 (2022), 4909–4926.
- [117] D. Konings, F. Alam, F. Noble, and E. M. Lai. 2019. SpringLoc: A Device-Free Localization Technique for Indoor Positioning and Tracking Using Adaptive RSSI Spring Relaxation. *IEEE Access* 7 (2019), 56960–56973.
- [118] L. M. P. Larsen, A. Checko, and H. L. Christiansen. 2019. A Survey of the Functional Splits Proposed for 5G Mobile Crosshaul Networks. *IEEE Communications Surveys Tutorials* 21, 1 (2019), 146–172.
- [119] F. Lazzari, A. Buffi, P. Nepa, and S. Lazzari. 2017. Numerical Investigation of an UWB Localization Technique for Unmanned Aerial Vehicles in Outdoor Scenarios. *IEEE Sensors Journal* 17, 9 (2017), 2896–2903.
- [120] Khaled B. Letaief, Wei Chen, Yuanming Shi, Jun Zhang, and Ying-Jun Angela Zhang. 2019. The Roadmap to 6G: AI Empowered Wireless Networks. *IEEE Communications Magazine* 57, 8 (2019), 84–90.
- [121] Chenning Li, Zhichao Cao, and Yunhao Liu. 2021. Deep AI Enabled Ubiquitous Wireless Sensing: A Survey. *ACM Comput. Surv.* 54, 2 (2021).
- [122] H. Li, K. Ota, and M. Dong. 2018. Learning IoT in Edge: Deep Learning for the Internet of Things with Edge Computing. *IEEE Network* 32, 1 (2018), 96–101.
- [123] P. R. Li, Z. Ding, and K. T. Feng. 2019. Enhanced Receiver Based on FEC Code Constraints for Uplink NOMA With Imperfect CSI. *IEEE Transactions on Wireless Communications* 18, 10 (2019), 4790–4802.
- [124] Qiang Li, Sissi Xiaoxiao Wu, Silei Wang, and Jingran Lin. 2020. Joint Uplink/Downlink Discrete Sum Rate Maximization for Full-Duplex Multicell Heterogeneous Networks. *IEEE Transactions on Vehicular Technology* 69, 3 (2020), 2758–2770.
- [125] Rongpeng Li, Chujie Wang, Zhifeng Zhao, Rongbin Guo, and Honggang Zhang. 2020. The LSTM-Based Advantage Actor-Critic Learning for Resource Management in Network Slicing With User Mobility. *IEEE Communications Letters* 24, 9 (2020), 2005–2009.
- [126] T. Li, A. K. Sahu, A. Talwalkar, and V. Smith. 2020. Federated Learning: Challenges, Methods, and Future Directions. *IEEE Signal Processing Magazine* 37, 3 (2020), 50–60.
- [127] Tianxu Li, Kun Zhu, Nguyen Cong Luong, Dusit Niyato, Qihui Wu, Yang Zhang, and Bing Chen. 2022. Applications of Multi-Agent Reinforcement Learning in Future Internet: A Comprehensive Survey. *IEEE Communications Surveys & Tutorials* 24, 2 (2022), 1240–1279.
- [128] X. Li et al. 2018. Optimization of Visible-Light Optical Wireless Systems: Network-Centric Versus User-Centric Designs. *IEEE Communications Surveys Tutorials* 20, 3 (2018), 1878–1904.
- [129] Yuanzheng Li, Guokai Hao, Yun Liu, Yaowen Yu, Zhixian Ni, and Yong Zhao. 2022. Many-Objective Distribution Network Reconfiguration Via Deep Reinforcement Learning Assisted Optimization Algorithm. *IEEE Transactions on Power Delivery* 37, 3 (2022), 2230–2244.
- [130] Xin Liang, Zhenyu Liu, Haoran Chang, and Lin Zhang. 2020. Wireless Channel Data Augmentation for Artificial Intelligence of Things in Industrial Environment Using Generative Adversarial Networks. In *Proc. IEEE International Conference on Industrial Informatics (INDIN)*, Vol. 1. 502–507.
- [131] Shao-Yu Lien, Shin-Lin Shieh, Yenming Huang, Borching Su, Yung-Lin Hsu, and Hung-Yu Wei. 2017. 5G New Radio: Waveform, Frame Structure, Multiple Access, and Initial Access. *IEEE Communications Magazine* 55, 6 (2017), 64–71.
- [132] C. Lin, G. Han, M. Guizani, Y. Bi, J. Du, and L. Shu. 2020. An SDN Architecture for AUV-Based Underwater Wireless Networks to Enable Cooperative Underwater Search. *IEEE Wireless Communications* 27, 3 (2020), 132–139.

- [133] K. Lin, M. Chen, J. Deng, M. M. Hassan, and G. Fortino. 2016. Enhanced Fingerprinting and Trajectory Prediction for IoT Localization in Smart Buildings. *IEEE Transactions on Automation Science and Engineering* 13, 3 (2016), 1294–1307.
- [134] Zhi Lin, Min Lin, Tomaso de Cola, Jun-Bo Wang, Wei-Ping Zhu, and Julian Cheng. 2021. Supporting IoT With Rate-Splitting Multiple Access in Satellite and Aerial-Integrated Networks. *IEEE Internet of Things Journal* 8, 14 (2021), 11123–11134.
- [135] Z. Lin, T. Lv, and P. T. Mathiopoulos. 2018. 3-D Indoor Positioning for Millimeter-Wave Massive MIMO Systems. *IEEE Transactions on Communications* 66, 6 (2018), 2472–2486.
- [136] Dong Liu, Jiankang Zhang, Jingjing Cui, Soon-Xin Ng, Robert G. Maunder, and Lajos Hanzo. 2022. Deep-Learning-Aided Packet Routing in Aeronautical Ad Hoc Networks Relying on Real Flight Data: From Single-Objective to Near-Pareto Multiobjective Optimization. *IEEE Internet of Things Journal* 9, 6 (2022), 4598–4614.
- [137] Jiajia Liu, Yongpeng Shi, Zubair Md. Fadlullah, and Nei Kato. 2018. Space-Air-Ground Integrated Network: A Survey. *IEEE Communications Surveys & Tutorials* 20, 4 (2018), 2714–2741.
- [138] S. Liu, R. Y. Chang, and F. Chien. 2019. Analysis and Visualization of Deep Neural Networks in Device-Free Wi-Fi Indoor Localization. *IEEE Access* 7 (2019), 69379–69392.
- [139] Xiao Liu, Yuanwei Liu, Yue Chen, and H. Vincent Poor. 2021. RIS Enhanced Massive Non-Orthogonal Multiple Access Networks: Deployment and Passive Beamforming Design. *IEEE Journal on Selected Areas in Communications* 39, 4 (2021), 1057–1071.
- [140] Yi Liu, Xiaoyan Kuai, Xiaojun Yuan, Ying-Chang Liang, and Liang Zhou. 2019. Learning-Based Iterative Interference Cancellation for Cognitive Internet of Things. *IEEE Internet of Things Journal* 6, 4 (2019), 7213–7224.
- [141] Yuanwei Liu, Xidong Mu, Jiaqi Xu, Robert Schober, Yang Hao, H. Vincent Poor, and Lajos Hanzo. 2021. STAR: Simultaneous Transmission and Reflection for 360° Coverage by Intelligent Surfaces. *IEEE Wireless Communications* 28, 6 (2021), 102–109.
- [142] Yuanwei Liu, Zhijin Qin, Maged ElKashlan, Zhiguo Ding, Arumugam Nallanathan, and Lajos Hanzo. 2017. Nonorthogonal Multiple Access for 5G and Beyond. *Proc. IEEE* 105, 12 (2017), 2347–2381.
- [143] Yusha Liu, Lie-Liang Yang, and Lajos Hanzo. 2020. Joint User-Activity and Data Detection for Grant-Free Spatial-Modulated Multi-Carrier Non-Orthogonal Multiple Access. *IEEE Transactions on Vehicular Technology* 69, 10 (2020), 11673–11684.
- [144] D. Lopez-Perez, A. Garcia-Rodriguez, L. Galati-Giordano, M. Kasslin, and K. Doppler. 2019. IEEE 802.11be Extremely High Throughput: The Next Generation of Wi-Fi Technology Beyond 802.11ax. *IEEE Communications Magazine* 57, 9 (2019), 113–119.
- [145] Kuan-I Lu, Chun-Jie Chiu, Kai-Ten Feng, and Po-Hsuan Tseng. 2019. Device-Free CSI-Based Wireless Localization for High Precision Drone Landing Applications. In *Proc. IEEE Vehicular Technology Conference (VTC-Fall)*. 1–5.
- [146] Nguyen Cong Luong, Dinh Thai Hoang, Shimin Gong, Dusit Niyato, Ping Wang, Ying-Chang Liang, and Dong In Kim. 2019. Applications of Deep Reinforcement Learning in Communications and Networking: A Survey. *IEEE Communications Surveys Tutorials* 21, 4 (2019), 3133–3174.
- [147] Ting Ma, Haibo Zhou, Bo Qian, Nan Cheng, Xuemin Shen, Xiang Chen, and Bo Bai. 2021. UAV-LEO Integrated Backbone: A Ubiquitous Data Collection Approach for B5G Internet of Remote Things Networks. *IEEE Journal on Selected Areas in Communications* 39, 11 (2021), 3491–3505.
- [148] George R. MacCartney and Theodore S. Rappaport. 2019. Millimeter-Wave Base Station Diversity for 5G Coordinated Multipoint (CoMP) Applications. *IEEE Transactions on Wireless Communications* 18, 7 (2019), 3395–3410.
- [149] Behrooz Makki, Krishna Chitti, Ali Behravan, and Mohamed-Slim Alouini. 2020. A Survey of NOMA: Current Status and Open Research Challenges. *IEEE Open Journal of the Communications Society* 1 (2020), 179–189.
- [150] Yijie Mao, Bruno Clerckx, and Victor O. K. Li. 2019. Rate-Splitting for Multi-Antenna Non-Orthogonal Unicast and Multicast Transmission: Spectral and Energy Efficiency Analysis. *IEEE Transactions on Communications* 67, 12 (2019), 8754–8770.
- [151] Ljiljana MarijanoviĀ, Stefan Schwarz, and Markus Rupp. 2020. Multiplexing Services in 5G and Beyond: Optimal Resource Allocation Based on Mixed Numerology and Mini-Slots. *IEEE Access* 8 (2020), 209537–209555.
- [152] Jie Mei, Xianbin Wang, and Kan Zheng. 2019. Intelligent Network Slicing for V2X Services Toward 5G. *IEEE Network* 33, 6 (2019), 196–204.
- [153] Minghui Min, Liang Xiao, Ye Chen, Peng Cheng, Di Wu, and Weihua Zhuang. 2019. Learning-Based Computation Offloading for IoT Devices With Energy Harvesting. *IEEE Transactions on Vehicular Technology* 68, 2 (2019), 1930–1941.
- [154] M. Mohammadi, A. Al-Fuqaha, M. Guizani, and J. Oh. 2018. Semisupervised Deep Reinforcement Learning in Support of IoT and Smart City Services. *IEEE Internet of Things Journal* 5, 2 (2018), 624–635.
- [155] M. Mohammadi, A. Al-Fuqaha, S. Sorour, and M. Guizani. 2018. Deep Learning for IoT Big Data and Streaming Analytics: A Survey. *IEEE Communications Surveys Tutorials* 20, 4 (2018), 2923–2960.
- [156] Xidong Mu, Yuanwei Liu, Li Guo, Jiaru Lin, and Robert Schober. 2022. Simultaneously Transmitting and Reflecting (STAR) RIS Aided Wireless Communications. *IEEE Transactions on Wireless Communications* 21, 5 (2022), 3083–3098.
- [157] S. Mumtaz, A. Alshohail, Z. Pang, A. Rayes, K. F. Tsang, and J. Rodriguez. 2017. Massive Internet of Things for Industrial Applications: Addressing Wireless IIoT Connectivity Challenges and Ecosystem Fragmentation. *IEEE Industrial Electronics Magazine* 11, 1 (2017), 28–33.

- [158] G. Naik et al. 2018. Coexistence of Wireless Technologies in the 5 GHz Bands: A Survey of Existing Solutions and a Roadmap for Future Research. *IEEE Communications Surveys Tutorials* 20, 3 (2018), 1777–1798.
- [159] N. Neshenko, E. Bou-Harb, J. Crichigno, G. Kaddoum, and N. Ghani. 2019. Demystifying IoT Security: An Exhaustive Survey on IoT Vulnerabilities and a First Empirical Look on Internet-Scale IoT Exploitations. *IEEE Communications Surveys Tutorials* 21, 3 (2019), 2702–2733.
- [160] Thanh Thi Nguyen, Ngoc Duy Nguyen, and Saeid Nahavandi. 2020. Deep Reinforcement Learning for Multiagent Systems: A Review of Challenges, Solutions, and Applications. *IEEE Transactions on Cybernetics* 50, 9 (2020), 3826–3839.
- [161] V. Nguyen, A. Brunstrom, K. Grinnemo, and J. Taheri. 2017. SDN/NFV-Based Mobile Packet Core Network Architectures: A Survey. *IEEE Communications Surveys Tutorials* 19, 3 (2017), 1567–1602.
- [162] Van-Linh Nguyen, Po-Ching Lin, Bo-Chao Cheng, Ren-Hung Hwang, and Ying-Dar Lin. 2021. Security and Privacy for 6G: A Survey on Prospective Technologies and Challenges. *IEEE Communications Surveys Tutorials* 23, 4 (2021), 2384–2428.
- [163] S. Niknam, H. S. Dhillon, and J. H. Reed. 2020. Federated Learning for Wireless Communications: Motivation, Opportunities, and Challenges. *IEEE Communications Magazine* 58, 6 (2020), 46–51.
- [164] Z. Ning, J. Huang, and X. Wang. 2019. Vehicular Fog Computing: Enabling Real-Time Traffic Management for Smart Cities. *IEEE Wireless Communications* 26, 1 (2019), 87–93.
- [165] Z. Ning, J. Huang, X. Wang, J. J. P. C. Rodrigues, and L. Guo. 2019. Mobile Edge Computing-Enabled Internet of Vehicles: Toward Energy-Efficient Scheduling. *IEEE Network* 33, 5 (2019), 198–205.
- [166] Md. Noor-A-Rahim, Zilong Liu, Haeyoung Lee, G. G. Md. Nawaz Ali, Dirk Pesch, and Pei Xiao. 2022. A Survey on Resource Allocation in Vehicular Networks. *IEEE Transactions on Intelligent Transportation Systems* 23, 2 (2022), 701–721.
- [167] Cameron Nowzari, Victor M. Preciado, and George J. Pappas. 2016. Analysis and Control of Epidemics: A Survey of Spreading Processes on Complex Networks. *IEEE Control Systems Magazine* 36, 1 (2016), 26–46.
- [168] C. Nowzari, V. M. Preciado, and G. J. Pappas. 2017. Optimal Resource Allocation for Control of Networked Epidemic Models. *IEEE Transactions on Control of Network Systems* 4, 2 (2017), 159–169.
- [169] V. Odelu, A. K. Das, M. Wazid, and M. Conti. 2018. Provably Secure Authenticated Key Agreement Scheme for Smart Grid. *IEEE Transactions on Smart Grid* 9, 3 (2018), 1900–1910.
- [170] Jose Ordóñez-Lucena, Pablo Ameigeiras, Diego Lopez, Juan J. Ramos-Munoz, Javier Lorca, and Jesus Folgueira. 2017. Network Slicing for 5G with SDN/NFV: Concepts, Architectures, and Challenges. *IEEE Communications Magazine* 55, 5 (2017), 80–87.
- [171] Dong Pan, Keren Li, Dong Ruan, Soon Xin Ng, and Lajos Hanzo. 2020. Single-Photon-Memory Two-Step Quantum Secure Direct Communication Relying on Einstein-Podolsky-Rosen Pairs. *IEEE Access* 8 (2020), 121146–121161.
- [172] Anand Paul, Awais Ahmad, M. Mazhar Rathore, and Sohail Jabbar. 2016. Smartbuddy: defining human behaviors using big data analytics in social internet of things. *IEEE Wireless Communications* 23, 5 (2016), 68–74.
- [173] Vitaly Petrov, Thomas Kurner, and Iwao Hosako. 2020. IEEE 802.15.3d: First Standardization Efforts for Sub-Terahertz Band Communications toward 6G. *IEEE Communications Magazine* 58, 11 (2020), 28–33.
- [174] Zhouyue Pi and Farooq Khan. 2011. An introduction to millimeter-wave mobile broadband systems. *IEEE Communications Magazine* 49, 6 (2011), 101–107.
- [175] Yury Polyanskiy, H. Vincent Poor, and Sergio Verdu. 2010. Channel Coding Rate in the Finite Blocklength Regime. *IEEE Transactions on Information Theory* 56, 5 (2010), 2307–2359.
- [176] T. D. Ponnimbaduge Perera, D. N. K. Jayakody, S. K. Sharma, S. Chatzinotas, and J. Li. 2018. Simultaneous Wireless Information and Power Transfer (SWIPT): Recent Advances and Future Challenges. *IEEE Communications Surveys Tutorials* 20, 1 (2018), 264–302.
- [177] P. Popovski, K. F. Trillingsgaard, O. Simeone, and G. Durisi. 2018. 5G Wireless Network Slicing for eMBB, URLLC, and mMTC: A Communication-Theoretic View. *IEEE Access* 6 (2018), 55765–55779.
- [178] Samira Pouyanfar, Saad Sadiq, Yilin Yan, Haiman Tian, Yudong Tao, Maria Presa Reyes, Mei-Ling Shyu, Shu-Ching Chen, and S. S. Iyengar. 2018. A Survey on Deep Learning: Algorithms, Techniques, and Applications. *ACM Comput. Surv.* 51, 5 (2018).
- [179] Ruizhe Qi, Xuefen Chi, Linlin Zhao, and Wanting Yang. 2020. Martingales-Based ALOHA-Type Grant-Free Access Algorithms for Multi-Channel Networks With mMTC/URLLC Terminals Co-Existence. *IEEE Access* 8 (2020), 37608–37620.
- [180] T. Qiu, B. Chen, A. K. Sangaiah, J. Ma, and R. Huang. 2018. A Survey of Mobile Social Networks: Applications, Social Characteristics, and Challenges. *IEEE Systems Journal* 12, 4 (2018), 3932–3947.
- [181] Theodore S. Rappaport, Shu Sun, Rimma Mayzus, Hang Zhao, Yaniv Azar, Kevin Wang, George N. Wong, Jocelyn K. Schulz, Mathew Samimi, and Felix Gutierrez. 2013. Millimeter Wave Mobile Communications for 5G Cellular: It Will Work! *IEEE Access* 1 (2013), 335–349.
- [182] T. S. Rappaport, Y. Xing, O. Kanhere, S. Ju, A. Madanayake, S. Mandal, A. Alkhateeb, and G. C. Trichopoulos. 2019. Wireless Communications and Applications Above 100 GHz: Opportunities and Challenges for 6G and Beyond. *IEEE Access* 7 (2019), 78729–78757.
- [183] M. T. Raza, S. Lu, and M. Gerla. 2019. vEPC-sec: Securing LTE Network Functions Virtualization on Public Cloud. *IEEE Transactions on Information Forensics and Security* 14, 12 (2019), 3287–3297.

- [184] U. Raza, P. Kulkarni, and M. Sooriyabandara. 2017. Low Power Wide Area Networks: An Overview. *IEEE Communications Surveys Tutorials* 19, 2 (2017), 855–873.
- [185] Hong Ren, Nan Liu, Cunhua Pan, Maged ElKashlan, Arumugam Nallanathan, Xiaohu You, and Lajos Hanzo. 2018. Low-Latency C-RAN: An Next-Generation Wireless Approach. *IEEE Vehicular Technology Magazine* 13, 2 (2018), 48–56.
- [186] A. L. Rezaabad, H. Beyranvand, J. A. Salehi, and M. Maier. 2018. Ultra-Dense 5G Small Cell Deployment for Fiber and Wireless Backhaul-Aware Infrastructures. *IEEE Transactions on Vehicular Technology* 67, 12 (2018), 12231–12243.
- [187] Ian P. Roberts, Jeffrey G. Andrews, Hardik B. Jain, and Sriram Vishwanath. 2021. Millimeter-Wave Full Duplex Radios: New Challenges and Techniques. *IEEE Wireless Communications* 28, 1 (2021), 36–43.
- [188] Malik Muhammad Saad, Muhammad Toaha Raza Khan, Syed Hassan Ahmed Shah, and Dongkyun Kim. 2021. Advancements in Vehicular Communication Technologies: C-V2X and NR-V2X Comparison. *IEEE Communications Magazine* 59, 8 (2021), 107–113.
- [189] Walid Saad, Mehdi Bennis, and Mingzhe Chen. 2020. A Vision of 6G Wireless Systems: Applications, Trends, Technologies, and Open Research Problems. *IEEE Network* 34, 3 (2020), 134–142.
- [190] A. Saboor, R. Ahmad, W. Ahmed, A. K. Kiani, Y. L. Moullec, and M. M. Alam. 2019. On Research Challenges in Hybrid Medium-Access Control Protocols for IEEE 802.15.6 WBANs. *IEEE Sensors Journal* 19, 19 (2019), 8543–8555.
- [191] Divya Saxena and Jiannong Cao. 2021. Generative Adversarial Networks (GANs): Challenges, Solutions, and Future Directions. *ACM Comput. Surv.* 54, 3 (may 2021), 1–42.
- [192] Kamil Senel and Erik G. Larsson. 2018. Grant-Free Massive MTC-Enabled Massive MIMO: A Compressive Sensing Approach. *IEEE Transactions on Communications* 66, 12 (2018), 6164–6175.
- [193] Muhammad Basit Shahab, Rana Abbas, Mahyar Shirvanimoghaddam, and Sarah J. Johnson. 2020. Grant-Free Non-Orthogonal Multiple Access for IoT: A Survey. *IEEE Communications Surveys Tutorials* 22, 3 (2020), 1805–1838.
- [194] Vishal Sharma, Ilsun You, and Nadra Guizani. 2020. Security of 5G-V2X: Technologies, Standardization, and Research Directions. *IEEE Network* 34, 5 (2020), 306–314.
- [195] Mohamed Shehata, Ke Wang, Julian Webber, Masayuki Fujita, Tadao Nagatsuma, and Withawat Withayachumnankul. 2021. IEEE 802.15.3d-Compliant Waveforms for Terahertz Wireless Communications. *Journal of Lightwave Technology* 39, 24 (2021), 7748–7760.
- [196] Li-Hsiang Shen, Ting-Wei Chang, Kai-Ten Feng, and Po-Tsang Huang. 2021. Design and Implementation for Deep Learning Based Adjustable Beamforming Training for Millimeter Wave Communication Systems. *IEEE Transactions on Vehicular Technology* 70, 3 (2021), 2413–2427.
- [197] L. H. Shen, Y. C. Chen, and K. T. Feng. 2020. Design and Analysis of Multi-User Association and Beam Training Schemes for Millimeter Wave Based WLANs. *IEEE Transactions on Vehicular Technology* 69, 7 (2020), 7458–7472.
- [198] Li-Hsiang Shen and Kai-Ten Feng. 2017. Joint Beam and Subband Resource Allocation with QoS Requirement for Millimeter Wave MIMO Systems. In *Proc. IEEE Wireless Communications and Networking Conference (WCNC)*. 1–6.
- [199] Li-Hsiang Shen and Kai-Ten Feng. 2020. Mobility-Aware Subband and Beam Resource Allocation Schemes for Millimeter Wave Wireless Networks. *IEEE Transactions on Vehicular Technology* 69, 10 (2020), 11893–11908.
- [200] L. H. Shen, K. T. Feng, and L. Hanzo. 2020. Coordinated Multiple Access Point Multiuser Beamforming Training Protocol for Millimeter Wave WLANs. *IEEE Transactions on Vehicular Technology* 69, 11 (2020), 13875–13889.
- [201] Li-Hsiang Shen, Shen-Fong Hung, and Kai-Ten Feng. 2021. Hybrid Energy Resource Allocation for Simultaneous Wireless Information and Power Transfer for Green Communications. *IEEE Transactions on Green Communications and Networking* 5, 4 (2021), 2121–2138.
- [202] Li-Hsiang Shen, Kuan-Hsun Liao, and Kai-Ten Feng. 2022. Queue-Aware Uplink Arbitration-based Contention and Downlink Resource Allocation for Multi-APs for IEEE 802.11ax WLANs. In *Proc. IEEE Wireless Communications and Networking Conference (WCNC)*. 1755–1760.
- [203] Li-Hsiang Shen, Chia-Yu Su, and Kai-Ten Feng. 2022. CoMP Enhanced Subcarrier and Power Allocation for Multi-Numerology Based 5G-NR Networks. *IEEE Transactions on Vehicular Technology* 71, 5 (2022), 5460–5476.
- [204] Li-Hsiang Shen, Chien-Hung Wu, Wun-Ci Su, and Kai-Ten Feng. 2021. Analysis and Implementation for Traffic-Aware Channel Assignment and Contention Scheme in LoRa-Based IoT Networks. *IEEE Internet of Things Journal* 8, 14 (2021), 11368–11383.
- [205] Wenqian Shen, Linglong Dai, Jianping An, Pingzhi Fan, and Robert W. Heath. 2019. Channel Estimation for Orthogonal Time Frequency Space (OTFS) Massive MIMO. *IEEE Transactions on Signal Processing* 67, 16 (2019), 4204–4217.
- [206] S. Sinche, D. Raposo, N. Armando, A. Rodrigues, F. Boavida, V. Pereira, and J. S. Silva. 2020. A Survey of IoT Management Protocols and Frameworks. *IEEE Communications Surveys Tutorials* 22, 2 (2020), 1168–1190.
- [207] Utkarsh Singh, Jean-François Determe, Françoise Horlin, and Philippe De Doncker. 2020. Crowd Forecasting Based on WiFi Sensors and LSTM Neural Networks. *IEEE Transactions on Instrumentation and Measurement* 69, 9 (2020), 6121–6131.
- [208] E. Sisinni, A. Saifullah, S. Han, U. Jennehag, and M. Gidlund. 2018. Industrial Internet of Things: Challenges, Opportunities, and Directions. *IEEE Transactions on Industrial Informatics* 14, 11 (2018), 4724–4734.
- [209] M. Sookhak, H. Tang, Y. He, and F. R. Yu. 2019. Security and Privacy of Smart Cities: A Survey, Research Issues and Challenges. *IEEE Communications Surveys Tutorials* 21, 2 (2019), 1718–1743.

- [210] Suraj Srivastava, Rahul Kumar Singh, Aditya K. Jagannatham, A. Chockalingam, and Lajos Hanzo. 2022. OTFS Transceiver Design and Sparse Doubly-Selective CSI Estimation in Analog and Hybrid Beamforming Aided mmWave MIMO Systems. *IEEE Transactions on Wireless Communications* (2022), 1–1.
- [211] Suraj Srivastava, Rahul Kumar Singh, Aditya K. Jagannatham, and Lajos Hanzo. 2022. Bayesian Learning Aided Simultaneous Row and Group Sparse Channel Estimation in Orthogonal Time Frequency Space Modulated MIMO Systems. *IEEE Transactions on Communications* 70, 1 (2022), 635–648.
- [212] Suraj Srivastava, Rahul Kumar Singh, Aditya K. Jagannatham, and Lajos Hanzo. 2022. Delay-Doppler and Angular Domain 4D-Sparse CSI Estimation in OTFS Aided MIMO Systems. *IEEE Transactions on Vehicular Technology* (2022), 1–6.
- [213] Chia-Yu Su, Chun-Hao Fang, Li-Hsiang Shen, and Kai-Ten Feng. 2020. Effective Capacity Maximization for Multi-Numerology based 5G NR Networks. In *Proc. IEEE Vehicular Technology Conference (VTC-Fall)*. 1–5.
- [214] Y. Su, Y. Liu, Y. Zhou, J. Yuan, H. Cao, and J. Shi. 2019. Broadband LEO Satellite Communications: Architectures and Key Technologies. *IEEE Wireless Communications* 26, 2 (2019), 55–61.
- [215] Y. Sun, M. Peng, and S. Mao. 2019. Deep Reinforcement Learning-Based Mode Selection and Resource Management for Green Fog Radio Access Networks. *IEEE Internet of Things Journal* 6, 2 (2019), 1960–1971.
- [216] El-Ghazali Talbi. 2021. Machine Learning into Metaheuristics: A Survey and Taxonomy. *ACM Comput. Surv.* 54, 6 (jul 2021), 1–32.
- [217] Fengxiao Tang, Bomin Mao, Yuichi Kawamoto, and Nei Kato. 2021. Survey on Machine Learning for Intelligent End-to-End Communication Toward 6G: From Network Access, Routing to Traffic Control and Streaming Adaption. *IEEE Communications Surveys Tutorials* 23, 3 (2021), 1578–1598.
- [218] S. Tanwar, Q. Bhatia, P. Patel, A. Kumari, P. K. Singh, and W. Hong. 2020. Machine Learning Adoption in Blockchain-Based Smart Applications: The Challenges, and a Way Forward. *IEEE Access* 8 (2020), 474–488.
- [219] Dagnachew Azene Temesgene, Marco Miozzo, Deniz Gıjndıjz, and Paolo Dini. 2021. Distributed Deep Reinforcement Learning for Functional Split Control in Energy Harvesting Virtualized Small Cells. *IEEE Transactions on Sustainable Computing* 6, 4 (2021), 626–640.
- [220] Jie Tian, Qianqian Liu, Haixia Zhang, and Dalei Wu. 2022. Multiagent Deep-Reinforcement-Learning-Based Resource Allocation for Heterogeneous QoS Guarantees for Vehicular Networks. *IEEE Internet of Things Journal* 9, 3 (2022), 1683–1695.
- [221] Bassant Tolba, Maha ElSabrouty, Mubarak G. Abdu-Aguye, Haris Gacanin, and Hossam Mohamed Kasem. 2020. Massive MIMO CSI Feedback Based on Generative Adversarial Network. *IEEE Communications Letters* 24, 12 (2020), 2805–2808.
- [222] R. Tourani, S. Misra, T. Mick, and G. Panwar. 2018. Security, Privacy, and Access Control in Information-Centric Networking: A Survey. *IEEE Communications Surveys Tutorials* 20, 1 (2018), 566–600.
- [223] Hsiao-Chien Tsai, Chun-Jie Chiu, Po-Hsuan Tseng, and Kai-Ten Feng. 2018. Refined Autoencoder-Based CSI Hidden Feature Extraction for Indoor Spot Localization. In *Proc. IEEE Vehicular Technology Conference (VTC-Fall)*. 1–5.
- [224] Tsung-Ting Tsai, Li-Hsiang Shen, Chun-Jie Chiu, and Kai-Ten Feng. 2020. Beam AoD-based Indoor Positioning for 60 GHz MmWave System. In *Proc. IEEE Vehicular Technology Conference (VTC-Fall)*. 1–5.
- [225] Chun-Kai Tseng, Sau-Hsuan Wu, Hsi-Lu Chao, Tony Q. S. Quek, and Chai-Hien Gan. 2019. Effective Service Architecture and Antenna Allocation Mechanism for CoMP Transmissions in Ultra Dense Networks. *IEEE Transactions on Wireless Communications* 18, 9 (2019), 4283–4297.
- [226] Mojtaba Vaezi, Amin Azari, Saeed R. Khosravirad, Mahyar Shirvanimoghaddam, M. Mahdi Azari, Danai Chasaki, and Petar Popovski. 2022. Cellular, Wide-Area, and Non-Terrestrial IoT: A Survey on 5G Advances and the Road Toward 6G. *IEEE Communications Surveys & Tutorials* 24, 2 (2022), 1117–1174.
- [227] H. Viswanathan and P. E. Mogensen. 2020. Communications in the 6G Era. *IEEE Access* 8 (2020), 57063–57074.
- [228] Q. D. Vo and P. De. 2016. A Survey of Fingerprint-Based Outdoor Localization. *IEEE Communications Surveys Tutorials* 18, 1 (2016), 491–506.
- [229] Dongming Wang, Menghan Wang, Pengcheng Zhu, Jiamin Li, Jiangzhou Wang, and Xiaohu You. 2020. Performance of Network-Assisted Full-Duplex for Cell-Free Massive MIMO. *IEEE Transactions on Communications* 68, 3 (2020), 1464–1478.
- [230] Jingjing Wang, Chunxiao Jiang, Zhu Han, Yong Ren, and Lajos Hanzo. 2018. Internet of Vehicles: Sensing-Aided Transportation Information Collection and Diffusion. *IEEE Transactions on Vehicular Technology* 67, 5 (2018), 3813–3825.
- [231] Jingjing Wang, Chunxiao Jiang, Haijun Zhang, Yong Ren, Kwang-Cheng Chen, and Lajos Hanzo. 2020. Thirty Years of Machine Learning: The Road to Pareto-Optimal Wireless Networks. *IEEE Communications Surveys Tutorials* 22, 3 (2020), 1472–1514.
- [232] Jingjing Wang, Chunxiao Jiang, Kai Zhang, Tony Q. S. Quek, Yong Ren, and Lajos Hanzo. 2018. Vehicular Sensing Networks in a Smart City: Principles, Technologies and Applications. *IEEE Wireless Communications* 25, 1 (2018), 122–132.
- [233] J. Wang, J. Luo, S. J. Pan, and A. Sun. 2019. Learning-Based Outdoor Localization Exploiting Crowd-Labeled WiFi Hotspots. *IEEE Transactions on Mobile Computing* 18, 4 (2019), 896–909.
- [234] Jue Wang, Zhaoyang Zhang, Xiaoming Chen, Caijun Zhong, and Lajos Hanzo. 2022. Unsources Massive Random Access Scheme Exploiting Reed-Muller Sequences. *IEEE Transactions on Communications* 70, 2 (2022), 1290–1303.
- [235] S. Wang, T. Tuor, T. Salonidis, K. K. Leung, C. Makaya, T. He, and K. Chan. 2019. Adaptive Federated Learning in Resource Constrained Edge Computing Systems. *IEEE Journal on Selected Areas in Communications* 37, 6 (2019), 1205–1221.

- [236] Xin Wang. 2021. Pursuing the Fundamental Limits for Quantum Communication. *IEEE Transactions on Information Theory* 67, 7 (2021), 4524–4532.
- [237] X. Wang, L. Gao, S. Mao, and S. Pandey. 2017. CSI-Based Fingerprinting for Indoor Localization: A Deep Learning Approach. *IEEE Transactions on Vehicular Technology* 66, 1 (2017), 763–776.
- [238] X. Wang, Y. Han, C. Wang, Q. Zhao, X. Chen, and M. Chen. 2019. In-Edge AI: Intelligentizing Mobile Edge Computing, Caching and Communication by Federated Learning. *IEEE Network* 33, 5 (2019), 156–165.
- [239] Fengsheng Wei, Gang Feng, Yao Sun, Yatong Wang, Shuang Qin, and Ying-Chang Liang. 2020. Network Slice Reconfiguration by Exploiting Deep Reinforcement Learning With Large Action Space. *IEEE Transactions on Network and Service Management* 17, 4 (2020), 2197–2211.
- [240] Xiaohui Wei, Yuanyuan Liu, Shang Gao, Xingwang Wang, and Hengshan Yue. 2019. An RNN-Based Delay-Guaranteed Monitoring Framework in Underwater Wireless Sensor Networks. *IEEE Access* 7 (2019), 25959–25971.
- [241] Zhiqiang Wei, Weijie Yuan, Shuangyang Li, Jinhong Yuan, Ganesh Bharatula, Ronny Hadani, and Lajos Hanzo. 2021. Orthogonal Time-Frequency Space Modulation: A Promising Next-Generation Waveform. *IEEE Wireless Communications* 28, 4 (2021), 136–144.
- [242] Chenyu Wu, Yuanwei Liu, Xidong Mu, Xuemai Gu, and Octavia A. Dobre. 2021. Coverage Characterization of STAR-RIS Networks: NOMA and OMA. *IEEE Communications Letters* 25, 9 (2021), 3036–3040.
- [243] C. Wu, F. Zhang, B. Wang, and K. J. R. Liu. 2020. EasiTrack: Decimeter-Level Indoor Tracking With Graph-Based Particle Filtering. *IEEE Internet of Things Journal* 7, 3 (2020), 2397–2411.
- [244] Qingqing Wu and Rui Zhang. 2020. Towards Smart and Reconfigurable Environment: Intelligent Reflecting Surface Aided Wireless Network. *IEEE Communications Magazine* 58, 1 (2020), 106–112.
- [245] Yixuan Wu, Laisen Nie, Shupeng Wang, Zhaolong Ning, and Shengtao Li. 2021. Intelligent Intrusion Detection for Internet of Things Security: A Deep Convolutional Generative Adversarial Network-enabled Approach. *IEEE Internet of Things Journal* (2021), 1–1. <https://doi.org/10.1109/JIOT.2021.3112159>
- [246] J. Huang X. Gao Z. Zhang M. Wang Y. Huang-C. Zhang Y. Jiang J. Wang X. You, C.-X. Wang et al. 2021. Towards 6G wireless communication networks: Vision, enabling technologies, and new paradigm shifts. *China Information Sciences* 64, 1 (2021), 1–74.
- [247] L. Xiao, X. Wan, X. Lu, Y. Zhang, and D. Wu. 2018. IoT Security Techniques Based on Machine Learning: How Do IoT Devices Use AI to Enhance Security? *IEEE Signal Processing Magazine* 35, 5 (2018), 41–49.
- [248] Y. Xiao, Y. Jia, C. Liu, X. Cheng, J. Yu, and W. Lv. 2019. Edge Computing Security: State of the Art and Challenges. *Proc. IEEE* 107, 8 (2019), 1608–1631.
- [249] Yang Xiao, Jun Liu, Jiawei Wu, and Nirwan Ansari. 2021. Leveraging Deep Reinforcement Learning for Traffic Engineering: A Survey. *IEEE Communications Surveys Tutorials* 23, 4 (2021), 2064–2097.
- [250] Chao Xu, Luping Xiang, Jiancheng An, Chen Dong, Shinya Sugiura, Robert G. Maunder, Lie-Liang Yang, and Lajos Hanzo. 2022. OTFS-Aided RIS-Assisted SAGIN Systems Outperform Their OFDM Counterparts in Doubly-Selective High-Doppler Scenarios. *IEEE Internet of Things Journal* (2022), 1–1.
- [251] P. Yang, Y. Xiao, M. Xiao, and S. Li. 2019. 6G Wireless Communications: Vision and Potential Techniques. *IEEE Network* 33, 4 (2019), 70–75.
- [252] X. Yang, Y. Yin, P. Chen, and Q. Niu. 2020. A Device-Free Intelligent Alarm System Based on the Channel State Information. *IEEE Transactions on Vehicular Technology* 69, 10 (2020), 11419–11427.
- [253] Yindi Yang, Shun Zhang, Feifei Gao, Jianpeng Ma, and Octavia A. Dobre. 2020. Graph Neural Network-Based Channel Tracking for Massive MIMO Networks. *IEEE Communications Letters* 24, 8 (2020), 1747–1751.
- [254] Zhong Yang, Yuanwei Liu, Yue Chen, and Naofal Al-Dhahir. 2021. Machine Learning for User Partitioning and Phase Shifters Design in RIS-Aided NOMA Networks. *IEEE Transactions on Communications* 69, 11 (2021), 7414–7428.
- [255] A. Yassin, Y. Nasser, M. Awad, A. Al-Dubai, R. Liu, C. Yuen, R. Raulefs, and E. Aboutanios. 2017. Recent Advances in Indoor Localization: A Survey on Theoretical Approaches and Applications. *IEEE Communications Surveys Tutorials* 19, 2 (2017), 1327–1346.
- [256] Hung-Yi Yen, Zhong-Ting Tsai, Yuan-Ching Chen, Li-Hsiang Shen, Chun-Jie Chiu, and Kai-Ten Feng. 2021. I/Q Density-based Angle of Arrival Estimation for Bluetooth Indoor Positioning Systems. In *Proc. IEEE Vehicular Technology Conference (VTC-Spring)*. 1–5.
- [257] Halil Yetgin, Kent Tsz Kan Cheung, Mohammed El-Hajjar, and Lajos Hanzo Hanzo. 2017. A Survey of Network Lifetime Maximization Techniques in Wireless Sensor Networks. *IEEE Communications Surveys Tutorials* 19, 2 (2017), 828–854.
- [258] Sixing Yin and F. Richard Yu. 2022. Resource Allocation and Trajectory Design in UAV-Aided Cellular Networks Based on Multiagent Reinforcement Learning. *IEEE Internet of Things Journal* 9, 4 (2022), 2933–2943.
- [259] Weijie Yuan, Zhiqiang Wei, Jinhong Yuan, and Derrick Wing Kwan Ng. 2020. A Simple Variational Bayes Detector for Orthogonal Time Frequency Space (OTFS) Modulation. *IEEE Transactions on Vehicular Technology* 69, 7 (2020), 7976–7980.
- [260] Yi Yuan, Gan Zheng, Kai-Kit Wong, and Khaled B. Letaief. 2021. Meta-Reinforcement Learning Based Resource Allocation for Dynamic V2X Communications. *IEEE Transactions on Vehicular Technology* 70, 9 (2021), 8964–8977.
- [261] Sheng Yue, Ju Ren, Jiang Xin, Deyu Zhang, Yaoyue Zhang, and Weihua Zhuang. 2022. Efficient Federated Meta-Learning Over Multi-Access Wireless Networks. *IEEE Journal on Selected Areas in Communications* 40, 5 (2022), 1556–1570.

- [262] F. Zafari, A. Gkelias, and K. K. Leung. 2019. A Survey of Indoor Localization Systems and Technologies. *IEEE Communications Surveys Tutorials* 21, 3 (2019), 2568–2599.
- [263] Z. Zaidi, V. Friderikos, Z. Yousaf, S. Fletcher, M. Dohler, and H. Aghvami. 2018. Will SDN Be Part of 5G? *IEEE Communications Surveys Tutorials* 20, 4 (2018), 3220–3258.
- [264] Alessio Zappone, Marco Di Renzo, and MÃlrouane Debbah. 2019. Wireless Networks Design in the Era of Deep Learning: Model-Based, AI-Based, or Both? *IEEE Transactions on Communications* 67, 10 (2019), 7331–7376.
- [265] C. Zhang, H. Zhang, J. Qiao, D. Yuan, and M. Zhang. 2019. Deep Transfer Learning for Intelligent Cellular Traffic Prediction Based on Cross-Domain Big Data. *IEEE Journal on Selected Areas in Communications* 37, 6 (2019), 1389–1401.
- [266] D. Zhang, Y. Hu, Y. Chen, and B. Zeng. 2019. BreathTrack: Tracking Indoor Human Breath Status via Commodity WiFi. *IEEE Internet of Things Journal* 6, 2 (2019), 3899–3911.
- [267] Haijun Zhang, Yanan Duan, Keping Long, and Victor C. M. Leung. 2021. Energy Efficient Resource Allocation in Terahertz Downlink NOMA Systems. *IEEE Transactions on Communications* 69, 2 (2021), 1375–1384.
- [268] H. Zhang, Y. Xiao, S. Bu, D. Niyato, F. R. Yu, and Z. Han. 2017. Computing Resource Allocation in Three-Tier IoT Fog Networks: A Joint Optimization Approach Combining Stackelberg Game and Matching. *IEEE Internet of Things Journal* 4, 5 (2017), 1204–1215.
- [269] J. Zhang, Z. Jiang, Z. Chen, and X. Hu. 2020. WMGCN: Weighted Meta-Graph Based Graph Convolutional Networks for Representation Learning in Heterogeneous Networks. *IEEE Access* 8 (2020), 40744–40754.
- [270] J. Zhang, F. Ye, and Y. Qian. 2020. Intelligent and Application-Aware Network Traffic Prediction in Smart Access Gateways. *IEEE Network* 34, 3 (2020), 264–269.
- [271] Rong Zhang, Jiaheng Wang, Zhaocheng Wang, Zhengyuan Xu, Chunming Zhao, and Lajos Hanzo. 2015. Visible light communications in heterogeneous networks: Paving the way for user-centric design. *IEEE Wireless Communications* 22, 2 (2015), 8–16.
- [272] Ruichen Zhang, Ke Xiong, Xingcong Tian, Yang Lu, Pingyi Fan, and Khaled Ben Letaief. 2022. Inverse Reinforcement Learning Meets Power Allocation in Multi-user Cellular Networks. In *Proc. IEEE Conference on Computer Communications Workshops (INFOCOM WKSHPS)*. 1–2.
- [273] Xiaoying Zhang, Lei Zhang, Pei Xiao, Dongtang Ma, Jibo Wei, and Yu Xin. 2018. Mixed Numerologies Interference Analysis and Inter-Numerology Interference Cancellation for Windowed OFDM Systems. *IEEE Transactions on Vehicular Technology* 67, 8 (2018), 7047–7061.
- [274] X. Zhang, M. Zhang, F. Meng, Y. Qiao, S. Xu, and S. Hour. 2019. A Low-Power Wide-Area Network Information Monitoring System by Combining NB-IoT and LoRa. *IEEE Internet of Things Journal* 6, 1 (2019), 590–598.
- [275] Yu Zhang and Qiang Yang. 2021. A Survey on Multi-Task Learning. *IEEE Transactions on Knowledge and Data Engineering* (2021), 1–1. <https://doi.org/10.1109/TKDE.2021.3070203>
- [276] Zhengquan Zhang, Yue Xiao, Zheng Ma, Ming Xiao, Zhiguo Ding, Xianfu Lei, George K. Karagiannidis, and Pingzhi Fan. 2019. 6G Wireless Networks: Vision, Requirements, Architecture, and Key Technologies. *IEEE Vehicular Technology Magazine* 14, 3 (2019), 28–41.
- [277] Ruikang Zhong, Yuanwei Liu, Xidong Mu, Yue Chen, Xianbin Wang, and Lajos Hanzo. 2022. Hybrid Reinforcement Learning for STAR-RISs: A Coupled Phase-Shift Model Based Beamformer. *IEEE Journal on Selected Areas in Communications* 40, 9 (2022), 2556–2569.
- [278] Mu Zhou, Yixin Lin, Nan Zhao, Qing Jiang, Xiaolong Yang, and Zengshan Tian. 2020. Indoor WLAN Intelligent Target Intrusion Sensing Using Ray-Aided Generative Adversarial Network. *IEEE Transactions on Emerging Topics in Computational Intelligence* 4, 1 (2020), 61–73.
- [279] P. Zhou, K. Cheng, X. Han, X. Fang, Y. Fang, R. He, Y. Long, and Y. Liu. 2018. IEEE 802.11ay-Based mmWave WLANs: Design Challenges and Solutions. *IEEE Communications Surveys Tutorials* 20, 3 (2018), 1654–1681.
- [280] R. Zhou, X. Lu, P. Zhao, and J. Chen. 2017. Device-Free Presence Detection and Localization With SVM and CSI Fingerprinting. *IEEE Sensors Journal* 17, 23 (2017), 7990–7999.
- [281] Rui Zhou, Mingjie Tang, Ziyuan Gong, and Meng Hao. 2020. FreeTrack: Device-Free Human Tracking With Deep Neural Networks and Particle Filtering. *IEEE Systems Journal* 14, 2 (2020), 2990–3000.
- [282] Xiaojun Zhou, Yuan Gao, Chaojie Li, and Zhaoke Huang. 2022. A Multiple Gradient Descent Design for Multi-Task Learning on Edge Computing: Multi-Objective Machine Learning Approach. *IEEE Transactions on Network Science and Engineering* 9, 1 (2022), 121–133.
- [283] Hangyu Zhu and Yaochu Jin. 2020. Multi-Objective Evolutionary Federated Learning. *IEEE Transactions on Neural Networks and Learning Systems* 31, 4 (2020), 1310–1322.
- [284] H. Zhu, F. Wang, R. Lu, F. Liu, G. Fu, and H. Li. 2018. Efficient and Privacy-Preserving Proximity Detection Schemes for Social Applications. *IEEE Internet of Things Journal* 5, 4 (2018), 2947–2957.
- [285] L. Zhu, C. Zhang, C. Xu, X. Du, N. Guizani, and K. Sharif. 2019. Traffic Monitoring in Self-Organizing VANETs: A Privacy-Preserving Mechanism for Speed Collection and Analysis. *IEEE Wireless Communications* 26, 6 (2019), 18–23.
- [286] Y. Zhuang, L. Hua, L. Qi, J. Yang, P. Cao, Y. Cao, Y. Wu, J. Thompson, and H. Haas. 2018. A Survey of Positioning Systems Using Visible LED Lights. *IEEE Communications Surveys Tutorials* 20, 3 (2018), 1963–1988.
- [287] Yixuan Zou, Yuanwei Liu, Kaifeng Han, Xiao Liu, and Kok Keong Chai. 2021. Meta-learning for RIS-assisted NOMA Networks. In *Proc. IEEE Global Communications Conference (GLOBECOM)*. 1–6.